


	<p>Test Report issued under the responsibility of:</p>
		 <p>www.nemko.com</p>
<p><b>Amendment to Test Report</b></p>		
<p><b>This Amendment is valid only together with the main Test Report</b></p>		
<p>Report No .....: <b>187672</b>                  Main Report No .....: 175993                  Date of issue .....: October 20, 2011                  Total number of pages .....: 17 pages and refer to page 3</p>		
<p>Applicant's Name .....: Quanta Computer Inc.                  Address .....: No. 188, Wen Hwa 2nd Road, Kuei Shan Hsiang, Tao Yuan Shien, 333, Taiwan</p>		
<p><b>Test specification</b></p> <p>Standard .....: IEC 60950-1:2005 (2nd Edition)                  Test procedure .....: CB scheme                  Non-standard test method .....: N/A</p>		
<p><b>Copyright © 2010 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.</b></p> <p>This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</p> <p>If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.</p> <p><b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b></p>		
<p>Test item description .....: Laptop Computer (OLPC)                  Trade Mark .....: OLPC                  Manufacturer .....: Quanta Computer Inc.                  No. 188, Wen Hwa 2nd Road, Kuei Shan Hsiang, Tao Yuan Shien, 333, Taiwan                  Model/Type reference .....: XO-1.5 HS; <b>XO-1.75HS</b>                  Ratings .....: 2A 12Vdc or 1.85A 13.5Vdc</p>		

Rev. 2010-11



Report No. 187672

<b>Testing procedure and testing location:</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	<b>Nemko Taiwan</b>
<b>Testing location/ address .....</b>		<b>5 Fl., No. 409, Sec. 2, Tiding Blvd., Neihu, Taipei 114, Taiwan</b>
<input type="checkbox"/>	<b>Associated CB Laboratory:</b>	
<b>Testing location/ address .....</b>		
	<b>Tested by (name + signature).....:</b>	Vincent Lin 
	<b>Approved by (name + signature)....:</b>	Andy Lee 
<input type="checkbox"/>	<b>Testing procedure: TMP</b>	
<b>Testing location/ address .....</b>		
	<b>Tested by (name + signature).....:</b>	
	<b>Approved by (name + signature)....:</b>	
<input type="checkbox"/>	<b>Testing procedure: WMT</b>	
<b>Testing location/ address .....</b>		
	<b>Tested by (name + signature).....:</b>	
	<b>Witnessed by (name + signature) ..:</b>	
	<b>Approved by (name + signature)....:</b>	
<input type="checkbox"/>	<b>Testing procedure: SMT</b>	
<b>Testing location/ address .....</b>		
	<b>Tested by (name + signature).....:</b>	
	<b>Approved by (name + signature)....:</b>	
	<b>Supervised by (name + signature):</b>	
<input type="checkbox"/>	<b>Testing procedure: RMT</b>	
<b>Testing location/ address .....</b>		
	<b>Tested by (name + signature).....:</b>	
	<b>Approved by (name + signature)....:</b>	
	<b>Supervised by (name + signature):</b>	



Report No. 187672

**Copy of marking plate: "UL approval in process when report issued."**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

<b>OLPC</b>	<b>MODEL No.: XO-1.75HS</b> Input :12Vdc  2A
<p>The device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p>	
Contains FCC ID:T5U-EM113MV	<b>LISTED</b> I.T.E. 8K33 E142692
Product of China Quanta Computer Inc. CS20 CT1	

<b>OLPC</b>	<b>MODEL No.: XO-1.75HS</b> Input :13.5Vdc  1.85A
<p>The device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p>	
Contains FCC ID:PPQ-WN6301MH	<b>LISTED</b> I.T.E. 8K33 E142692
Product of China Quanta Computer Inc. CS20 CT1	

**List of Attachments (including a total number of pages in each attachment):**

Photos (1 page)



www.nemko.com

Report No. 187672

<b>Summary of testing:</b>	
<b>Tests performed (name of test and test clause):</b> 1.6 Power interface 2.5 Limited power sources 4.3 Design and construction 4.5 Thermal requirements 5.3 Abnormal operating and fault conditions  <u>Operation condition:</u> The unit is sending/receiving data to all I/O ports. Each USB port loaded to 0.5A. Speaker is adjusted to max. volume. Adjustment of brightness is set to maximum. The empty battery pack is charging at the same time.	<b>Testing location: see page 2</b>
<b>Summary of compliance with National Differences</b> The sample(s) tested compliance with the requirements of IEC 60950-1: 2005 2nd Edition and all CENELEC members as listed in EN 60950-1: 2006 2nd Edition, A11: 2009. All national differences listed in the IECEE Online CB Bulletin are covered by the Common Modifications, Special National Conditions, National Deviations, and the National Requirements noted above except for the countries which are documented in main test report.  "The update concern is not effecting to national difference which listed in main test report."	



Report No. 187672

<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement .....	P (Pass)
- test object does not meet the requirement .....	F (Fail)
<b>Testing .....</b>	
Date of receipt of test item.....:	September, 2011
Date(s) of performance of tests.....:	September - October, 2011
<b>General remarks:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	

<b>Manufacturer's Declaration per sub-clause 6.2.5 of IEC60335-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided..... :	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	



[www.nemko.com](http://www.nemko.com)

Report No. 187672

**Name and address of factory (ies).....:**

1. Changshu Zhanyun Electronics Co., Ltd.  
No 18, Qingdao Road, High-tech Industrial Park, Changshu Economic Development Zone, Changshu, Jiangsu Province, P.R., China
2. Tech-Full Computer (Changshu) Co., Ltd.  
**No. 8, Jinzhou Rd., High-Tech Industrial Park, Changshu Economic Development Zone, Changshu Jiangsu Province, 215500, P.R. China**
3. Tech-Full Computer (Changshu) Co., Ltd.  
No. 9, Chaoyang Road, High-tech Industrial Park, Changshu Economic Development Zone, Changshu, Jiangsu Province, **215500, P.R. China**
4. Tech-Com (Shanghai) Computer Co., Ltd.  
No.4, Lane 58,Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
5. Tech-Com (Shanghai) Computer Co., Ltd.  
No.6, Lane 58,Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
6. Tech-Com (Shanghai) Computer Co., Ltd.  
No.7, Lane 58,Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
7. Tech-Giant (Shanghai) Computer Co., Ltd.  
No.68,Rongjiang Road, Songjiang Export Processing Zone, Shanghai, China
8. Tech-Front (Shanghai) Computer Co., Ltd.  
No. 2, Lane 58, Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
9. Tech-Com (Shanghai) Computer Co. Ltd.  
No. 68, Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
- 10. Tech-Front (Chongqing) Computer Co., Ltd.  
18#, Zongbao Road, Shapingba District, Chongqing, P.R., China**



www.nemko.com

Report No. 187672

**General product information:**  
 This Amendment shall always be enclosed with main Test Report, report/order no. 175993.

The changes concern the following:

- Add one new model XO-1.75HS, which is identical to model XO-1.5 HS except model name.
- Add an alternative source of main board (called main board B, original is main board A), power distribution switch and RTC battery.
- Revised factory address, refer to bold texts in "Name and address of factory (ies)" for details.
- Cancel two factories and add one new factory.

If nothing else stated, testing was conducted on XO-1.75HS with main board B.

<b>Project history:</b>		
Nemko Report/ Order No.:	Modification to the appliances:	Changes/ Modifications in clause(s):
175993	Main report	
187672	<ul style="list-style-type: none"> <li>- Add one new model XO-1.75HS.</li> <li>- Add an alternative source of main board, power distribution switch and RTC battery.</li> <li>- Revised factory address.</li> <li>- Cancel two factories and add one new factory.</li> </ul>	1.5, 1.6, 1.7, 2.5, 4.3, 4.5 and 5.3



www.nemko.com

Report No. 187672

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5	Components		<b>P</b>
1.5.1	General		<b>P</b>
	Comply with IEC 60950-1 or relevant component standard	(see appended table 1.5.1)	<b>P</b>
1.5.2	Evaluation and testing of components	Certified components are used in accordance with their ratings, certifications and they comply with applicable parts of this standard. Components not certified are used in accordance with their ratings and they comply with applicable parts of IEC 60950-1 and the relevant component standard. Components, for which no relevant IEC-standard exists, have been tested under the conditions occurring in the equipment, using applicable parts of IEC 60950-1.	<b>P</b>
1.6	Power interface		<b>P</b>
1.6.1	AC power distribution systems	The equipment is regarded as Class III.	—
1.6.2	Input current	(see appended table 1.6.2)	<b>P</b>
1.7	Marking and instructions		<b>P</b>
1.7.1	Power rating	The required marking is located in the battery pack compartment of the equipment.	<b>P</b>
	Rated voltage(s) or voltage range(s) (V) .....	12Vdc or 13.5Vdc	—
	Symbol for nature of supply, for d.c. only .....	IEC 60417-1, symbol No. 5031, is used.	<b>P</b>
	Rated frequency or rated frequency range (Hz) ...	DC supplied.	—
	Rated current (mA or A) .....	2A or 1.85A	—
	Manufacturer's name or trade-mark or identification mark .....	OLPC	—
	Model identification or type reference .....	XO-1.5 HS; XO-1.75HS	—





www.nemko.com

Report No. 187672

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Symbol for Class II equipment only .....	The equipment is regarded as Class III.	N/A
	Other markings and symbols .....	The additional marking does not give rise to misunderstandings.	P

2.5	Limited power sources		P
	a) Inherently limited output	- MIC, headphone ports are inherently limited, only for signal transmission. - SD Card reader slot is inherently limited, it can only insert the storage cards and covered by fire enclosure when such cards insert to the ports.	P
	b) Impedance limited output		N/A
	c) Regulating network limited output under normal operating and single fault condition	USB ports are limited by regulating network. (refer to appended table 2.5.)	P
	d) Overcurrent protective device limited output		N/A
	Max. output voltage (V), max. output current (A), max. apparent power (VA) .....	(refer to appended table 2.5).	P
	Current rating of overcurrent protective device (A) ..	No such parts used.	N/A

4.3	Design and construction		P
4.3.8	Batteries	Refer to below:	P
	- Overcharging of a rechargeable battery	Certified battery pack used, refer also to table 5.3.	P
	- Unintentional charging of a non-rechargeable battery	For RTC battery, refer to table 4.3.8.	P
	- Reverse charging of a rechargeable battery	Special shape connector provided for prevent reverse polarity or reverse charging.	N/A
	- Excessive discharging rate for any battery	Refer to separated battery pack CB test report in main test report.	P

4.5	Thermal requirements		P
-----	----------------------	--	---



www.nemko.com

Report No. 187672

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.5.1	General		<b>P</b>
4.5.2	Temperature tests	(see appended table 4.5)	<b>P</b>
	Normal load condition per Annex L ..... :		<b>—</b>
4.5.3	Temperature limits for materials	(see appended table 4.5)	<b>P</b>
4.5.4	Touch temperature limits	(see appended table 4.5)	<b>P</b>
4.5.5	Resistance to abnormal heat ..... :	No thermoplastic parts carrying hazardous voltages.	<b>N/A</b>
5.3	Abnormal operating and fault conditions		<b>P</b>
5.3.4	Functional insulation..... :	Complies with c).	<b>P</b>
5.3.6	Audio amplifiers in ITE ..... :	Considered, the speaker is adjusted to max. volume during the test.	<b>P</b>
5.3.7	Simulation of faults	See the enclosed fault condition tests.	<b>P</b>
5.3.9	Compliance criteria for abnormal operating and fault conditions	Refer to below:	<b>P</b>
5.3.9.1	During the tests	No fire or molten metal occurred and no deformation of enclosure during the tests.	<b>P</b>
5.3.9.2	After the tests	Class III equipment.	<b>N/A</b>



www.nemko.com

Report No. 187672

1.5.1		TABLE: list of critical components				P
object/part No.	manufacturer/ trademark	type/model	technical data	standard	mark(s) of conformity <sup>1)</sup>	
RTC battery (lithium)	Hitachi Maxell Energy Ltd.	ML1220	Max. charging voltage 12Vdc, max. charging current 100mA	UL 1642	UL (MH12568)	
Power distribution switch (for USB ports)	Diodes	AP21xy The "x" in the model name can be any number from 4 to 9 (denoting active low or active high enable pin) and "y" can be 1, 2 or 6 (denoting channel switch type).	Single channel: 1.0A, 2.7-5.5 Vdc, SELV, Class III	IEC 60950-1: 2005 (ed.2), UL Subject 2367	CB by N (NO50519), UL	
supplementary information:						
<sup>1)</sup> an asterisk indicates a mark which assures the agreed level of surveillance						

1.6.2		TABLE: Electrical data (in normal conditions)					P
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status	
12	1.48	2.0	17.76	--	--	Normal load <b>1)</b>	
12	1.40	2.0	16.80	--	--	Battery charging only <b>1)</b>	
13.5	1.48	1.85	19.98	--	--	Normal load <b>2)</b>	
13.5	1.26	1.85	17.01	--	--	Battery charging only <b>2)</b>	
13.5	1.48	1.85	19.98	--	--	Normal load <b>3)</b>	
13.5	1.26	1.85	17.01	--	--	Battery charging only <b>3)</b>	
6.99	1.54	--	10.76	--	--	System off with empty battery pack charging mode. (Measure battery pack connector)	
6.42	2.10	--	13.48	--	--	Maximum normal load supplied by battery pack discharging mode. (Measure battery pack connector)	
Supplementary information:							
<b>1)</b> Tested with power adapter: Bestec / NA0241WAA <b>2)</b> Tested with power adapter: Darfon / BB0J-C <b>3)</b> Tested with power adapter: Bestec / NA025SDFxy							



www.nemko.com

Report No. 187672


2.5	TABLE: limited power sources					P
	U <sub>oc</sub>	I <sub>sc</sub> (A)		VA		
		Meas.	Limit	Meas.	Limit	
USB port (CN11) pin 1 – RTN (normal)	4.95	1.31	8.0	5.28	100	
USB port (CN11) pin 2~4 – RTN (normal)	0	0	8.0	0	100	
USB port (CN9) pin 1 – RTN (normal)	4.95	1.31	8.0	5.28	100	
USB port (CN9) pin 2~4 – RTN (normal)	0	0	8.0	0	100	
USB port (CN12) pin 1 – RTN (normal)	4.95	1.31	8.0	5.18	100	
USB port (CN12) pin 2~4 – RTN (normal)	0	0	8.0	0	100	
SD Card reader (CN19) pin 4 - RTN	2.22	0	8.0	0	100	
SD Card reader (CN19) Other pins - RTN	0	0	8.0	0	100	
MIC port (All pins to RTN)	0	0	8.0	0	100	
Headphone port (All pins to RTN)	0	0	8.0	0	100	
Supplementary information:						
s-c=short circuit						

4.3.8	TABLE: Batteries	<b>P</b>
-------	------------------	----------

Battery category .....	Lithium-ion for battery pack which is certified according to IEC 60950-1. For RTC battery (lithium), see below.
Manufacturer .....	See table 1.5.1 for details.
Type / model.....	See table 1.5.1 for details.
Voltage .....	See table 1.5.1 for details.
Capacity.....	--
Tested and Certified by (incl. Ref. No.) .....	UL, see table 1.5.1 for details.

Circuit protection diagram:

### RTC Battery Charger

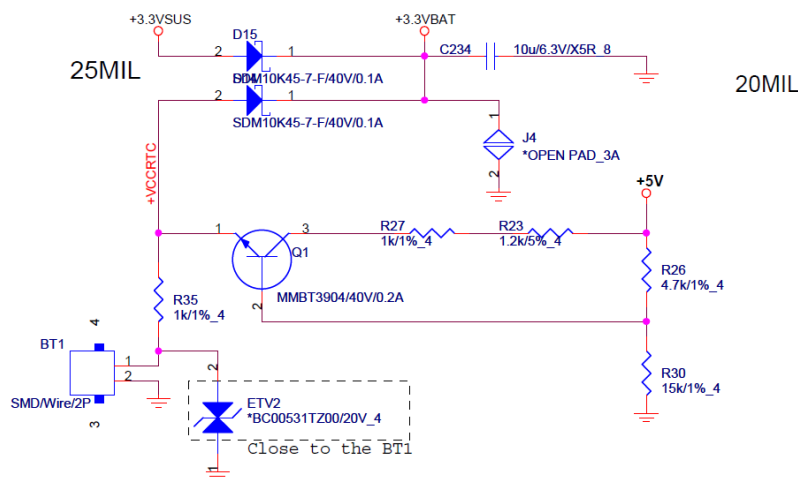

Max. charge current (during fault conditions)	Normal, measured I = 2mA (limit=100mA); When R26 short circuit, measured I = 4mA (limit=100mA); When R23 short circuit, measured I = 2mA (limit=100mA); When Q1 (1-3) short circuit, measured I = 2mA (limit=100mA); When D14 short circuit, measured I = 3mA (limit=100mA); When R35 short circuit, measured I = 3mA (limit=100mA)
---	--

MARKINGS AND INSTRUCTIONS (1.7.2.1, 1.7.13)	
Location of replaceable battery	In service access areas
	Language(s): English
Close to the battery	No, see sub clause 1.7.13
In the servicing instructions	Yes, see sub clause 1.7.13
In the operating instructions	Yes, see sub clause 1.7.13



www.nemko.com

Report No. 187672

4.3.8	TABLE: Batteries								<b>P</b>
The tests of 4.3.8 are applicable only when appropriate battery data is not available							Yes.		<b>P</b>
Is it possible to install the battery in a reverse polarity position?									<b>N</b>
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition	--	--	2)	--	--	--	--	1)	1)
Max. current during fault condition	--	--	2)	--	--	--	--	1)	1)
<p>1) Battery polarity can't be reversed according to the design of enclosure and connector.</p> <p>2) For RTC battery, refer to above table for details.</p>									

Test results:		Verdict
- Chemical leaks	No chemical leaks affecting required insulation.	<b>P</b>
- Explosion of the battery	No explosion.	<b>P</b>
- Emission of flame or expulsion of molten metal	No emission of flame or expulsion of molten metal.	<b>P</b>
- Electric strength tests of equipment after completion of tests	Class III equipment.	<b>N</b>
Supplementary information:		



www.nemko.com

Report No. 187672

4.5	TABLE: maximum temperatures			<b>P</b>
	test voltage (V) :	13.5Vdc	Battery discharge	—
maximum temperature T of part/at:		T (°C)		allowed T <sub>max</sub> (°C)
U19 near PWB		40.0	36.5	85.2
U20 near PWB		40.0	36.4	85.2
RTC battery		38.5	35.0	--
Enclosure inside near U19		38.0	33.3	--
Enclosure outside near U19		37.5	31.8	55.2*)
Enclosure outside near front panel		25.3	25.3	75.2
Enclosure outside near mouse control board		31.1	27.0	55.2*)
Enclosure outside near battery pack		25.6	25.6	55.2*)
Ambient		25.2	25.2	--
supplementary information:				
<p>Having a specified maximum ambient temperature of 45°C. The maximum allowed temperatures are calculated based upon a (minimum) test temperature of 25.2°C. Temp. limit is adjusted according to cl. 1.4.12.3. If no limit is stated, temperature is for reference only.                  *) Continuously held in normal use.</p>				



www.nemko.com

Report No. 187672

5.3	TABLE: Fault condition tests					<b>P</b>
	Ambient temperature (°C) .....				25°C, if nothing else specified	—
	Power source for EUT: Manufacturer, model/type, output rating .....				Refer to general product information for details.	—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
Speaker	s-c	13.5	10 min	--	--	Unit normal operation except speaker output shutdown, no hazard.
Charger circuit on main board						
Normal	--	13.5	--	--	--	Charging current for battery pack: 1.50A. No hazard. (limit: 3100mA)
PR176	s-c	13.5	--	--	--	Charging current for battery pack: 1.50A. No hazard. (limit: 3100mA)
PQ61 pin 1 – 8	s-c	13.5	--	--	--	Charging current for battery pack: 1.50A. No hazard. (limit: 3100mA)
PR185	s-c	13.5	--	--	--	Charging current for battery pack: 1.50A. No hazard. (limit: 3100mA)
PQ66 pin 1 – 5	s-c	13.5	--	--	--	Charging current for battery pack: 1.62A. No hazard. (limit: 3100mA)
Data ports						
USB port (CN11) pin 1 – RTN (normal)	o-l	13.5	1hr	--	--	Maximum available current= 1310mA (4.95V), no hazard.
USB port (CN11) pin 2~4 – RTN (normal)	o-l	13.5	--	--	--	Maximum available current= 0mA (0V), no hazard.
USB port (CN9) pin 1 – RTN (normal)	o-l	13.5	1hr	--	--	Maximum available current= 1310mA (4.95V), no hazard.
USB port (CN9) pin 2~4 – RTN (normal)	o-l	13.5	--	--	--	Maximum available current= 0mA (0V), no hazard.
USB port (CN12) pin 1 – RTN (normal)	o-l	13.5	1hr	--	--	Maximum available current= 1310mA (4.95V), no hazard.





www.nemko.com

Report No. 187672

Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
USB port (CN12) pin 2-4 – RTN (normal)	o-l	13.5	--	--	--	Maximum available current= 0mA (0V), no hazard.
SD Card reader (CN19) pin 4 - RTN	o-l	13.5	--	--	--	Maximum available current= 0mA (2.22V), no hazard.
SD Card reader (CN19) Other pins - RTN	o-l	13.5	--	--	--	Maximum available current= 0mA (0V), no hazard.
MIC port (All pins to RTN)	o-l	13.5	--	--	--	Maximum available current= 0mA (0V), no hazard.
Headphone port (All pins to RTN)	o-l	13.5	--	--	--	Maximum available current= 0mA (0V), no hazard.
Supplementary information:						
s-c=short circuit, o-c=open circuit, o-l=overload						



www.nemko.com

## Photos

Report No. 187672

Main board B

