



FCC RF Test Report

APPLICANT : Quanta Computer Inc.
EQUIPMENT : Laptop Computer
BRAND NAME : OLPC
MODEL NAME : XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS
FCC ID : HFS-CL4
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Dec. 17, 2012 and completely tested on Feb. 25, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant..... 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Testing Site..... 6

 1.6 Applied Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 Descriptions of Test Mode..... 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 Description of RF Function Operation Test Setup..... 10

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 Number of Channel Measurement 12

 3.2 Hopping Channel Separation Measurement 14

 3.3 Dwell Time Measurement..... 21

 3.4 20dB Bandwidth Measurement 23

 3.5 Peak Output Power Measurement 30

 3.6 Conducted Band Edges Measurement 33

 3.7 Conducted Spurious Emission Measurement 40

 3.8 Radiated Band Edges and Spurious Emission Measurement 44

 3.9 AC Conducted Emission Measurement..... 57

 3.10 Antenna Requirements..... 61

4 LIST OF MEASURING EQUIPMENT..... 62

5 UNCERTAINTY OF EVALUATION..... 63

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(b)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1 w for 1Mbps ≤ 125 Mw for 2, 3Mbps	Pass	-
3.6	15.247(d)	A8.5	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 8.08 dB at 119.240 MHz
3.9	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 7.98 dB at 7.210 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Quanta Computer Inc.

No.188, Wen Hwa 2nd Rd., Kuei Shan Hsiang, Tao Yuan Shien, TaiWan

1.2 Manufacturer

Quanta Computer Inc.

No.188, Wen Hwa 2nd Rd., Kuei Shan Hsiang, Tao Yuan Shien, TaiWan

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Laptop Computer
Brand Name	OLPC
Model Name	XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS
WLAN Module	Trade Name: Liteon Model Name: WCBN603MH
FCC ID	HFS-CL4
EUT supports Radios application	WLAN 11abgn/Bluetooth
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BDR (1Mbps) : 1.88 dBm (0.0015 W) Bluetooth EDR (2Mbps) : -0.01 dBm (0.0010 W) Bluetooth EDR (3Mbps) : 0.53 dBm (0.0011 W)
Antenna Type	Monopole Antenna type with gain 1.37 dBi type
Type of Modulation	Bluetooth BDR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	1.75 dBm	-0.13 dBm	0.46 dBm
Ch39	2441MHz	1.88 dBm	-0.01 dBm	0.53 dBm
Ch78	2480MHz	1.67 dBm	-0.15 dBm	0.41 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
 - b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BDR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz in Laptop Mode with Adapter 1 for Sample 1 Mode 2: CH39_2441 MHz in Laptop Mode with Adapter 1 for Sample 1 Mode 3: CH78_2480 MHz in Laptop Mode with Adapter 1 for Sample 1 Mode 4: CH78_2480 MHz in Tablet Mode with Adapter 1 for Sample 1		
AC Conducted Emission	Mode 1 : WLAN (2.4GHz) Link + Adapter 1 + TC for Sample 1 Mode 2 : WLAN (2.4GHz) Link + Adapter 2 + TC for Sample 2 Mode 3 : WLAN (2.4GHz) Link + Adapter 3 + TC for Sample 3 Mode 4 : WLAN (2.4GHz) Link + Adapter 4 + TC for Sample 4 Mode 5 : WLAN (5GHz) Link + Adapter 1 + TC for Sample 1		
<p>Remark: 1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.</p> <p>2. The worst case of conducted emission is mode 1; only the test data of it was reported.</p> <p>3. TC stands for Test Configuration, and consists of iPod, Earphone, HDMI Cable, SD Card.</p>			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

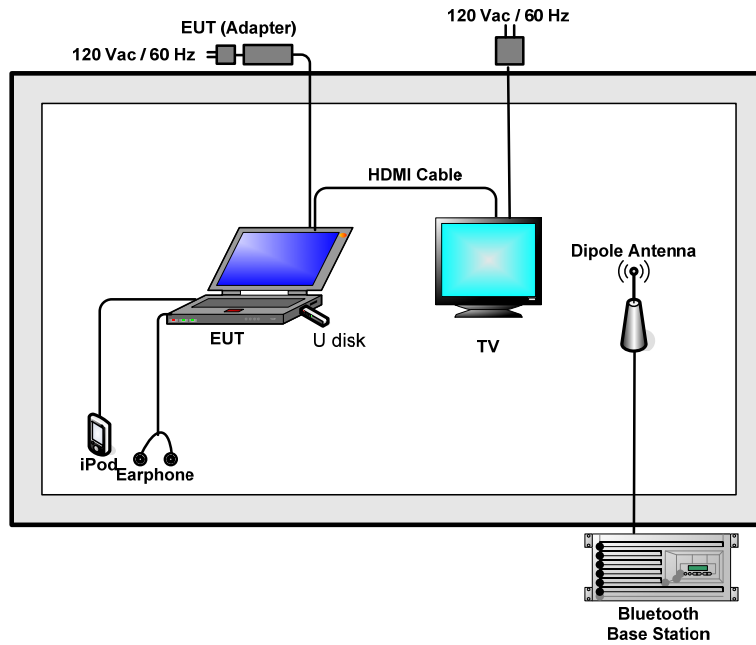

<AC Conducted Emission Mode>

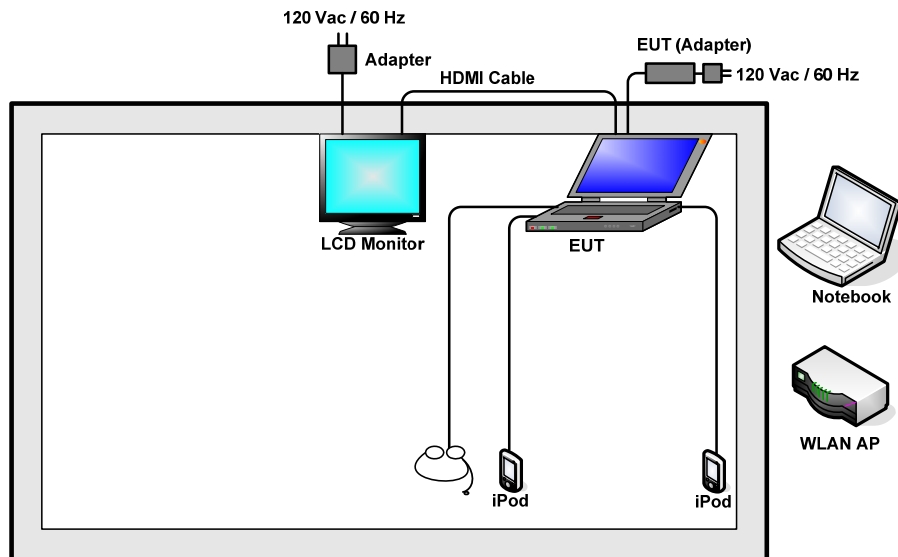

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT	FCC DoC	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	iPod	Apple	A1199	FCC DoC	Shielded, 1.2 m	N/A
4.	TV	Sony	KLV32V300A	FCC DoC	N/A	Unshielded, 1.8 m
5.	LCD Monitor	Medion	MD20147	N/A	N/A	Unshielded, 1.8 m
6.	U disk	kingston	G3	N/A	N/A	N/A
7.	SD Card	Scan Disk	16G Class 10	FCC DoC	N/A	N/A
8.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
9.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
10.	Earphone	INTOPIC	Jazz-278	FCC DoC	Shielded, 2.2 m	N/A

2.5 Description of RF Function Operation Test Setup

Turn on "Terminal" program under Linux system, the EUT will get into the engineering modes; then, entry instruction under cmd program in the notebook, the EUT will contact with WLAN AP for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.6 + 10 = 15.6 \text{ (dB)} \end{aligned}$$

For radiated band edges and spurious emission test :

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

$$\text{Average Emission Level(dBuV/m)} = \text{Peak Emission Level(dBuV/m)} + \text{Duty cycle correction factor(dB)}$$

$$\text{Duty cycle correction factor(dB)} = 20 * \log(\text{Duty cycle}).$$

Duty cycle = On time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example : bluetooth with dwell time 2.9ms and 2 hops in 100 ms, then

$$\text{Duty cycle correction factor(dB)} = 20 * \log((2.9 * 2) / 100) = -24.73 \text{ dB}$$

Following shows an average computation example with duty cycle correction factor = -24.73dB, and the peak emission level is 45.61 dBuV/m.

Example :

$$\begin{aligned} \text{Average Emission Level(dBuV/m)} &= \text{Peak Emission Level(dBuV/m)} + \text{duty cycle correction factor(dB)} \\ &= 45.61 + (-24.73) = 20.88 \text{ (dBuV/m)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

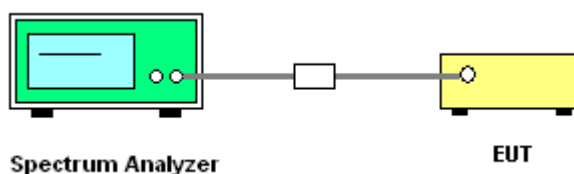


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%


Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	≥ 20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

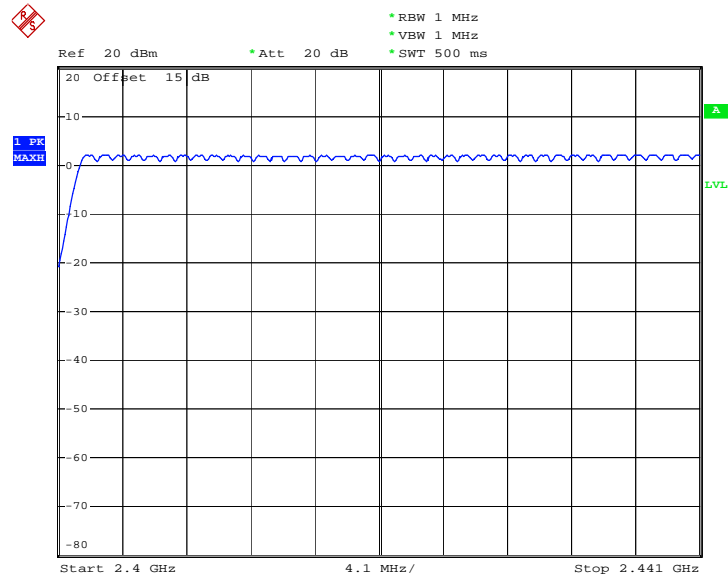

Date: 26.JAN.2013 23:19:33

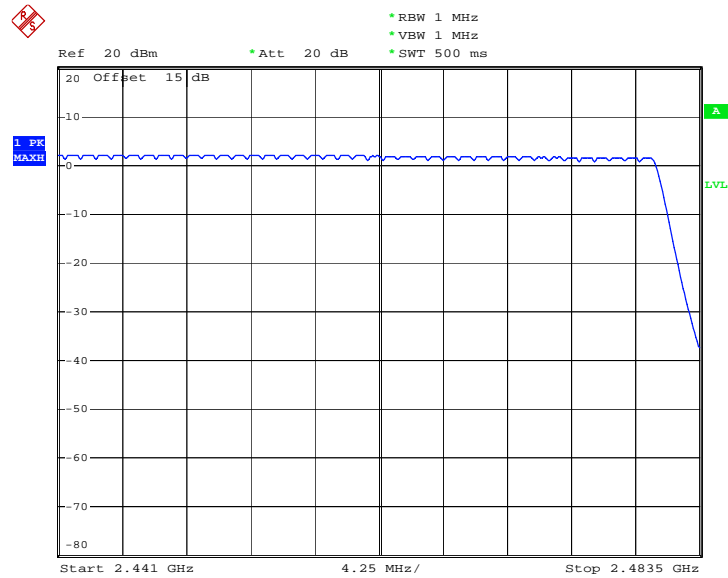

Date: 26.JAN.2013 23:48:23

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup






3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6267	Pass
39	2441	1.002	0.6267	Pass
78	2480	1.002	0.6240	Pass


Channel Separation Plot on Channel 00 - 01

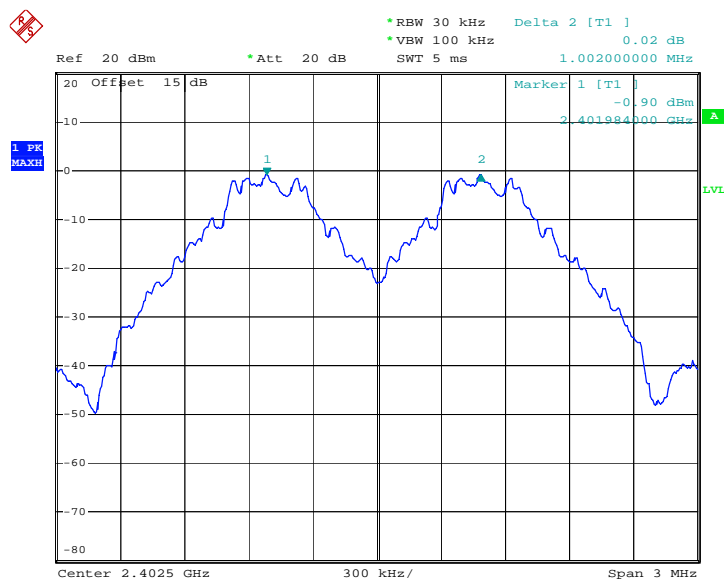

Date: 26.JAN.2013 22:49:07




Channel Separation Plot on Channel 39 - 40

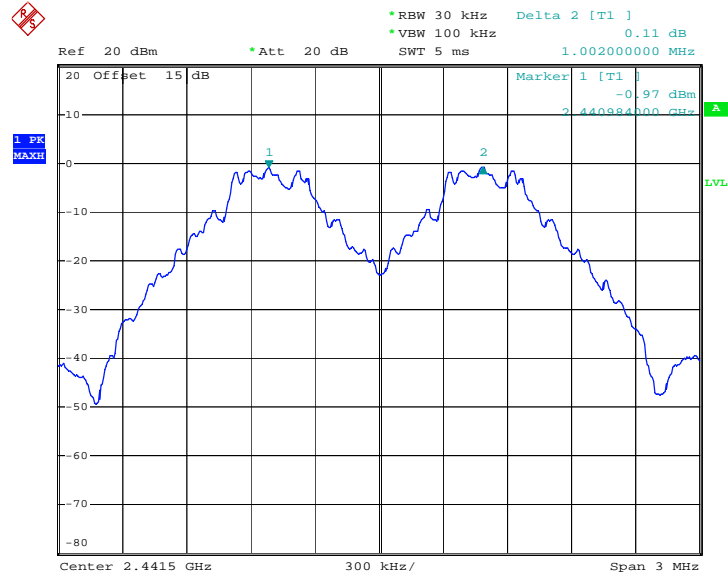

Date: 26.JAN.2013 22:50:18

Channel Separation Plot on Channel 77 - 78

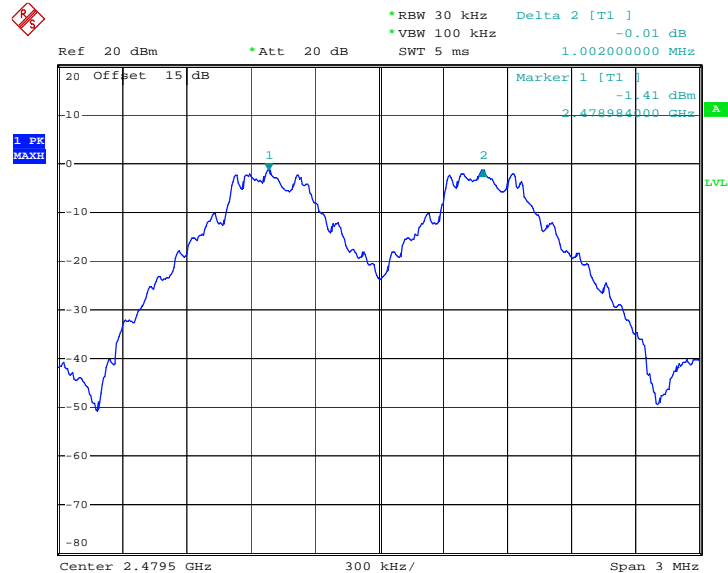


Date: 26.JAN.2013 22:51:31



Test Mode :	2Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8680	Pass
39	2441	1.002	0.8680	Pass
78	2480	1.002	0.8680	Pass


Channel Separation Plot on Channel 00 - 01

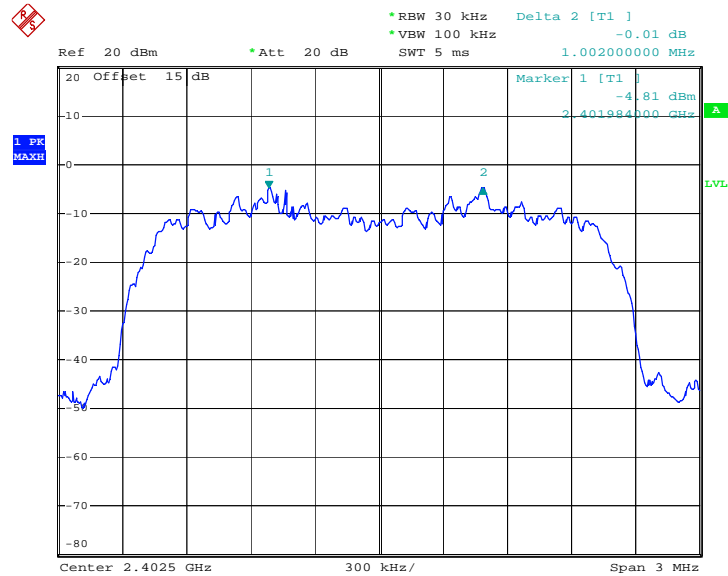

Date: 27.JAN.2013 01:07:56




Channel Separation Plot on Channel 39 - 40

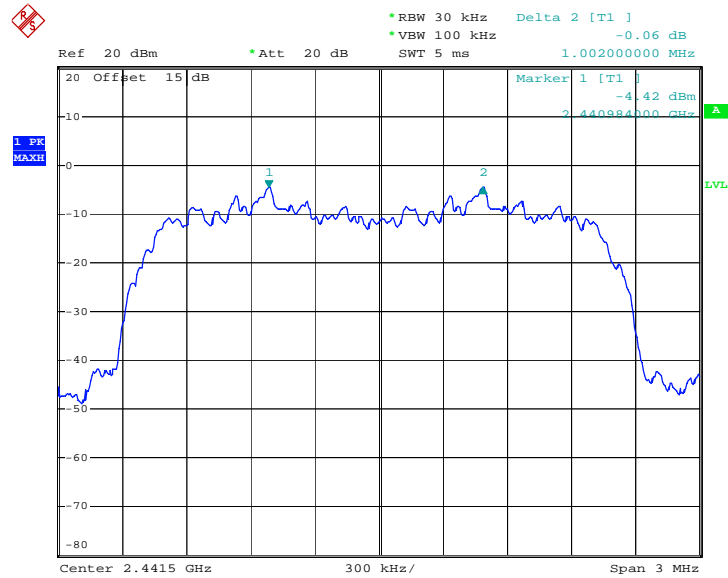

Date: 26.JAN.2013 22:52:56

Channel Separation Plot on Channel 77 - 78

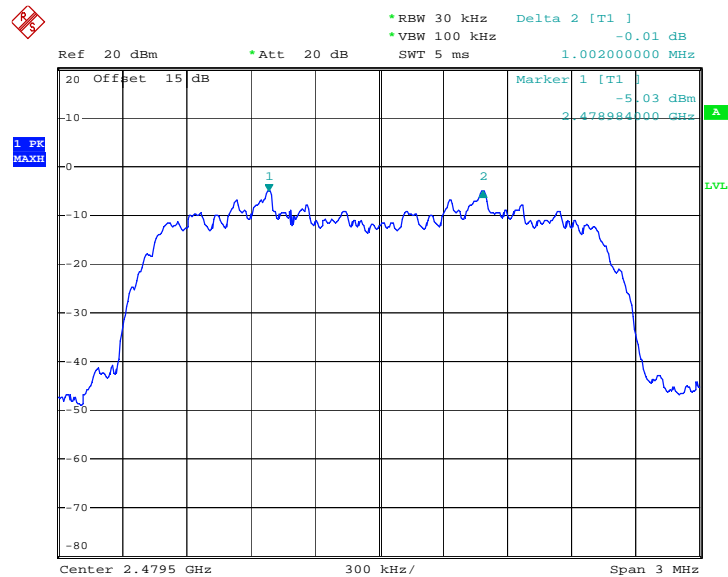


Date: 26.JAN.2013 22:53:35



Test Mode :	3Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8720	Pass
39	2441	1.002	0.8760	Pass
78	2480	1.002	0.8760	Pass


Channel Separation Plot on Channel 00 - 01

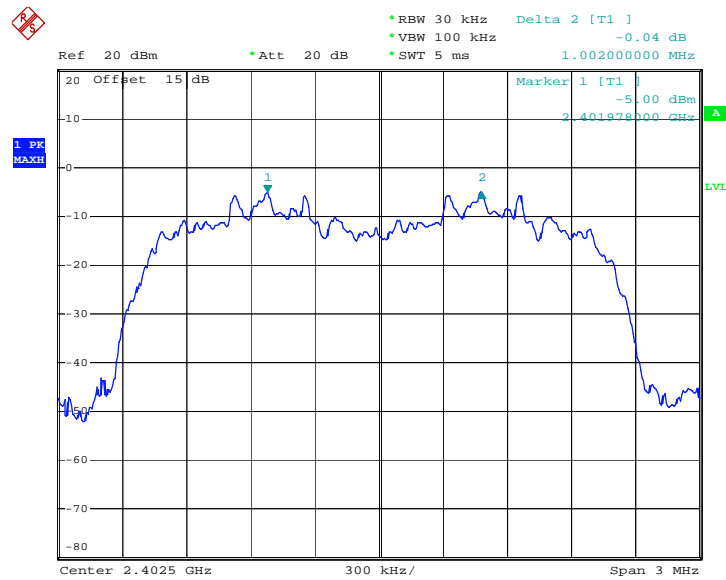

Date: 4.FEB.2013 16:47:38




Channel Separation Plot on Channel 39 - 40

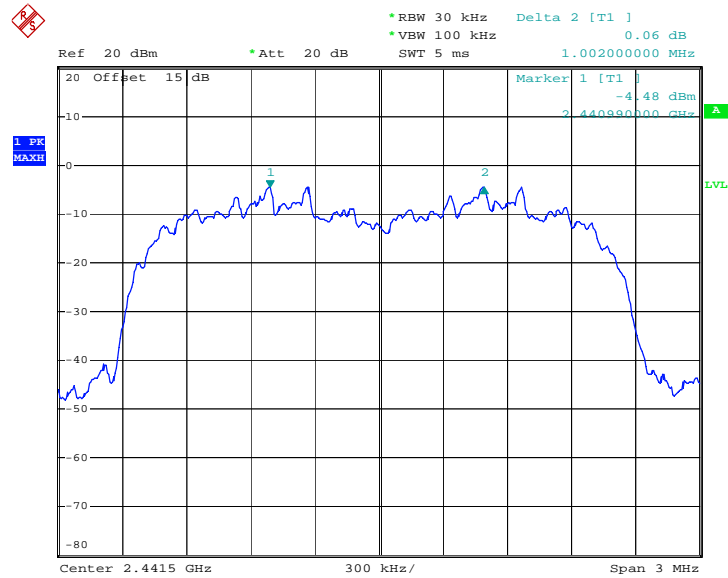

Date: 26.JAN.2013 22:55:01

Channel Separation Plot on Channel 77 - 78

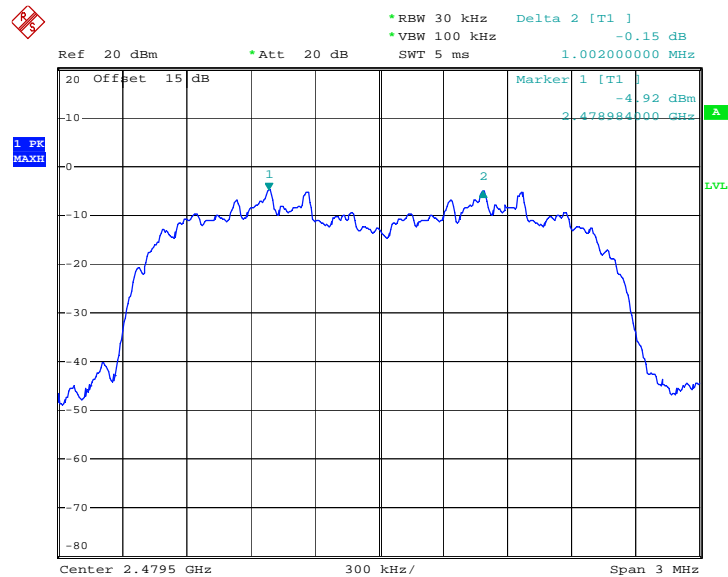

Date: 26.JAN.2013 22:56:50


Remark:

1. In normal mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channels.
 With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
 Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.

2. In AFH mode, hopping rate is 800hops/s with 6 slots in 20 hopping channels.
 With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
 Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.34 hops.

3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Package Transfer Time Plot

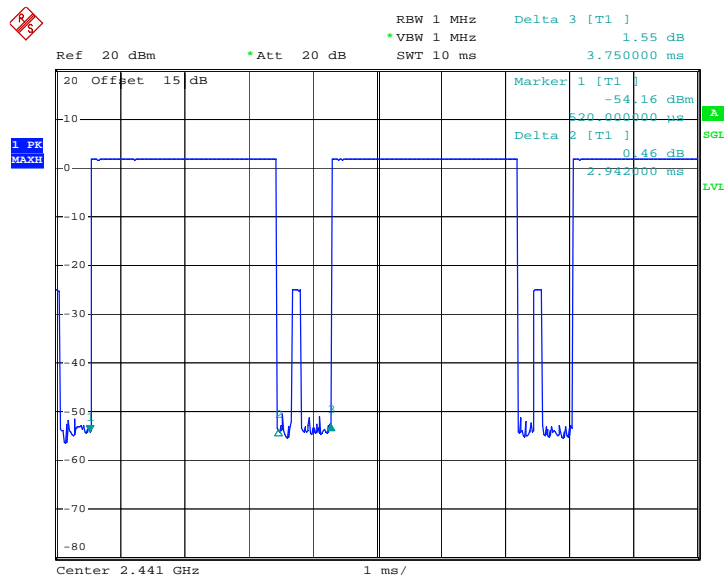

Date: 19.JAN.2013 18:33:46

3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Measure and record the results in the test report.

3.4.4 Test Setup

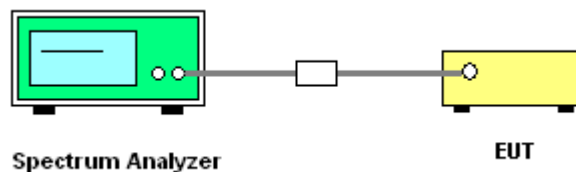


3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.940
39	2441	0.940
78	2480	0.936


20 dB Bandwidth Plot on Channel 00

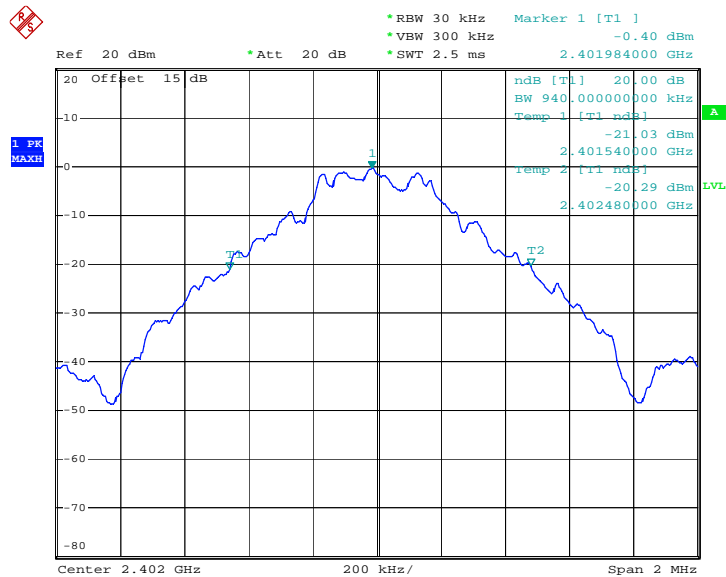

Date: 26.JAN.2013 23:52:47




20 dB Bandwidth Plot on Channel 39

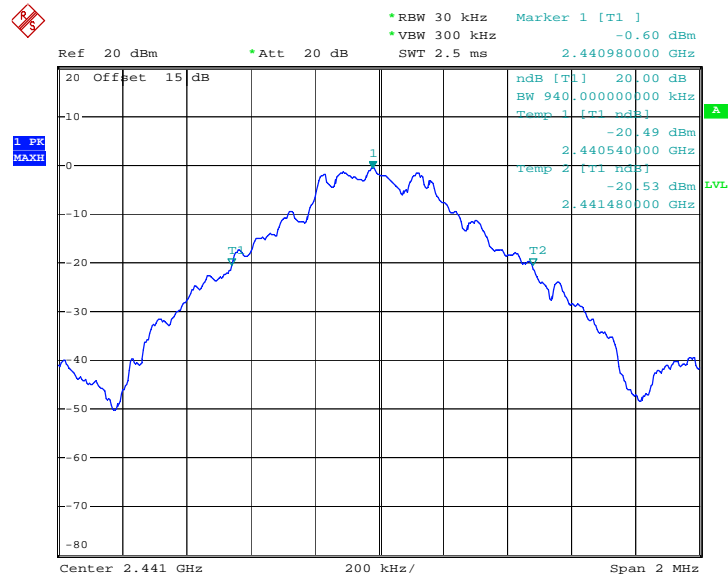

Date: 26.JAN.2013 22:57:15

20 dB Bandwidth Plot on Channel 78

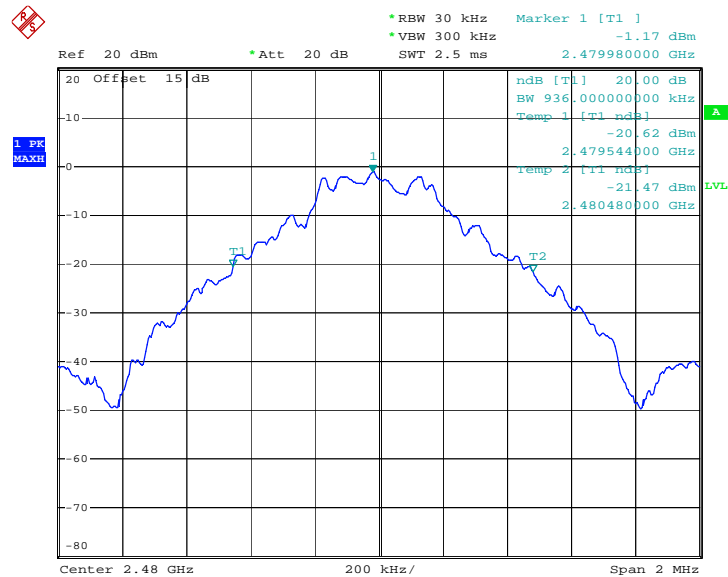


Date: 26.JAN.2013 22:58:14



Test Mode :	2Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.302
39	2441	1.302
78	2480	1.302


20 dB Bandwidth Plot on Channel 00

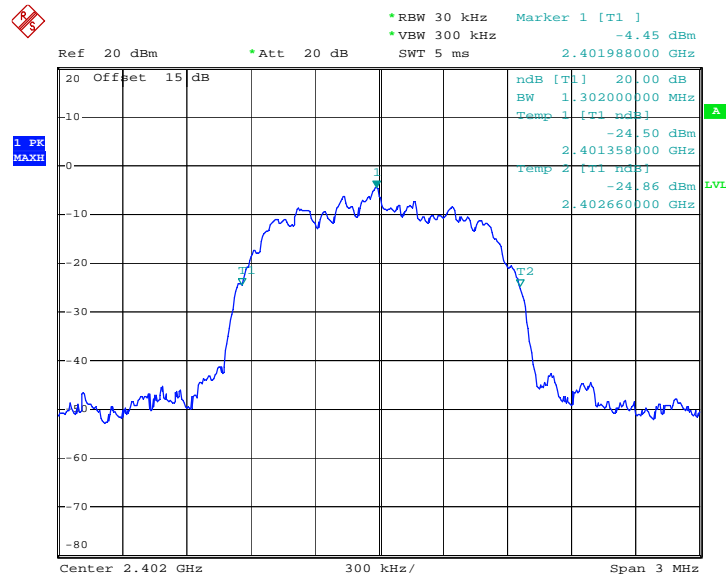

Date: 26.JAN.2013 22:58:31




20 dB Bandwidth Plot on Channel 39

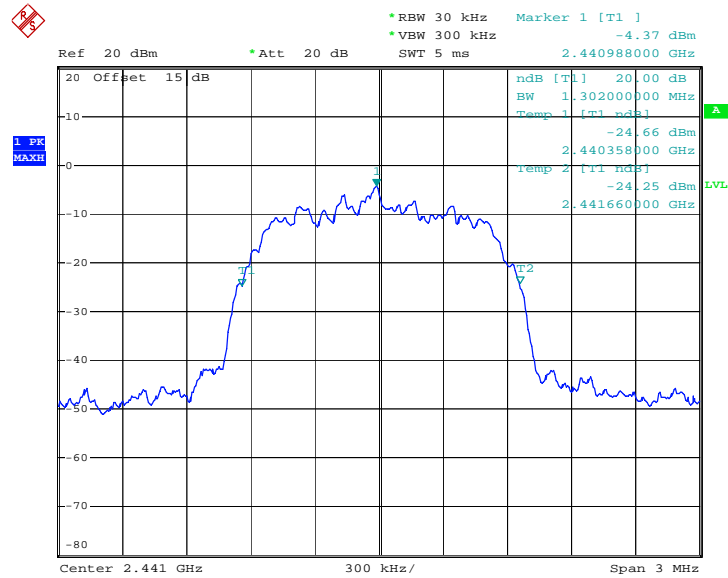

Date: 26.JAN.2013 22:59:05

20 dB Bandwidth Plot on Channel 78

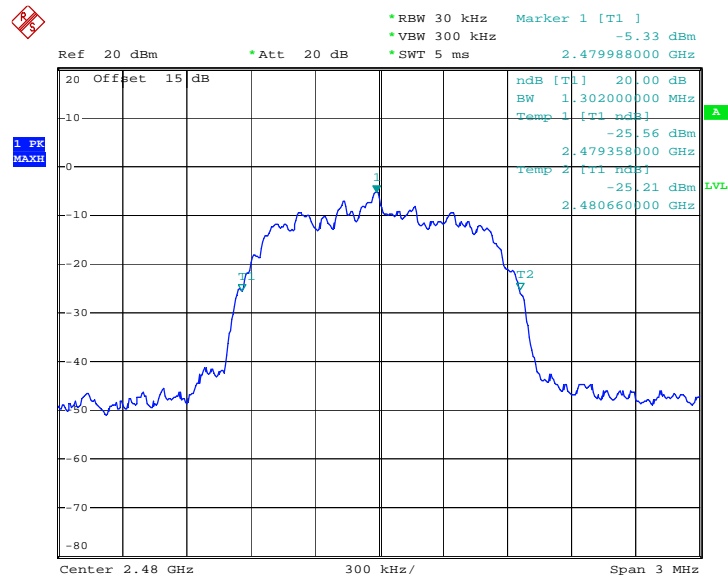


Date: 27.JAN.2013 01:03:14



Test Mode :	3Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.308
39	2441	1.314
78	2480	1.314


20 dB Bandwidth Plot on Channel 00

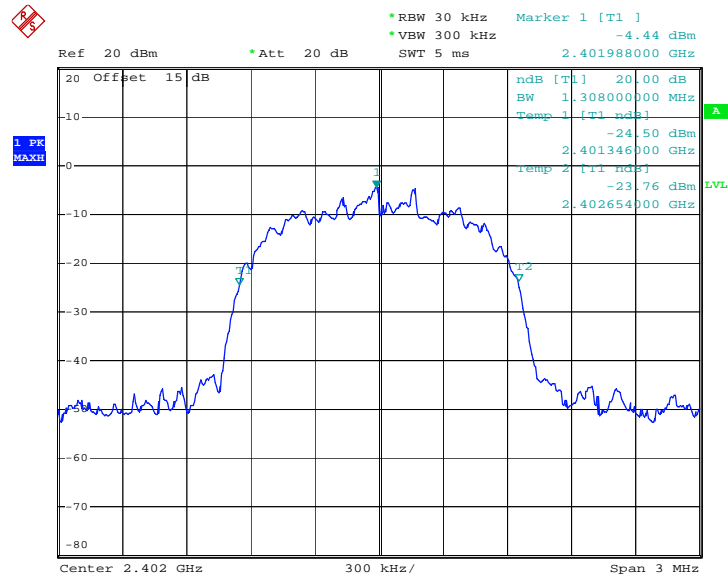

Date: 26.JAN.2013 23:00:05




20 dB Bandwidth Plot on Channel 39

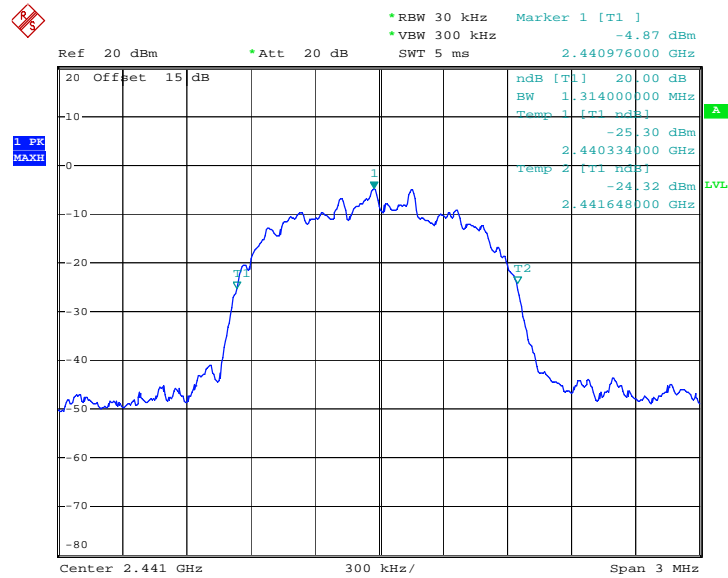

Date: 4.FEB.2013 01:33:15

20 dB Bandwidth Plot on Channel 78

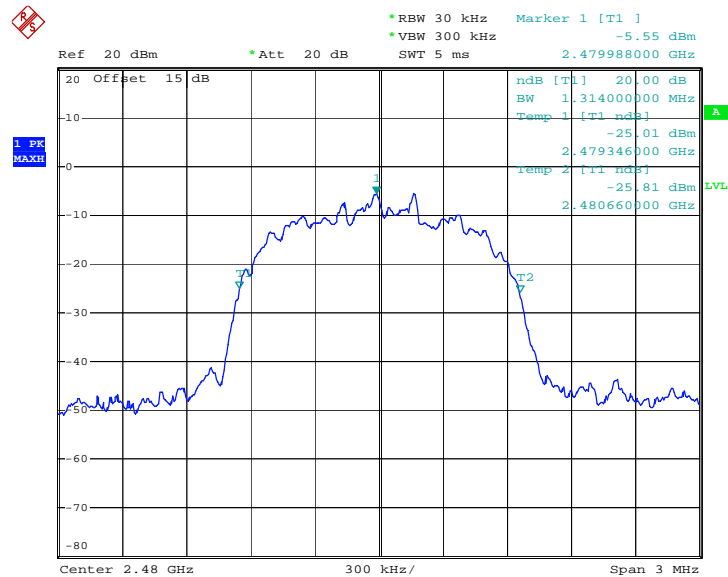

Date: 26.JAN.2013 23:00:49

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

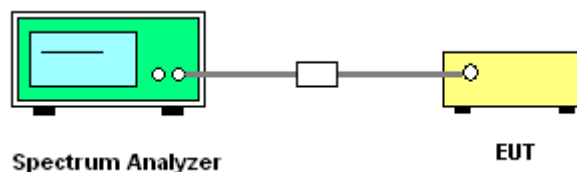




3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	1.75	30.00	Pass
39	2441	1.88	30.00	Pass
78	2480	1.67	30.00	Pass


Peak Output Power Plot on Channel 00

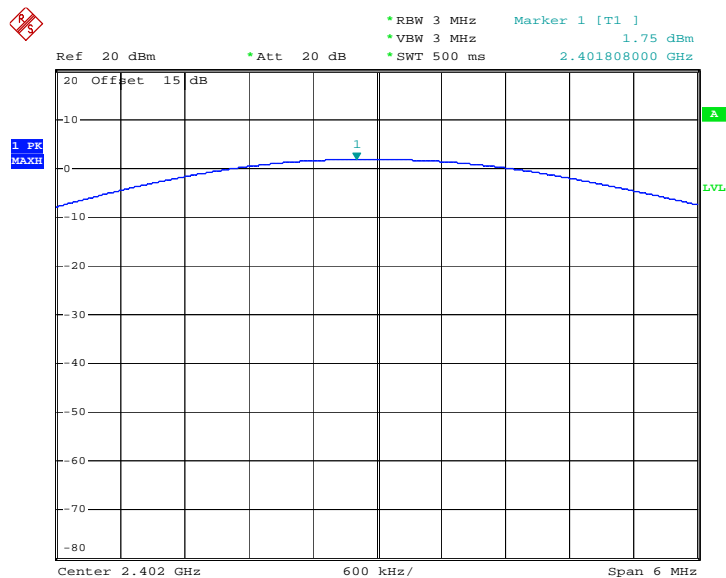

Date: 19.JAN.2013 18:26:58




Peak Output Power Plot on Channel 39

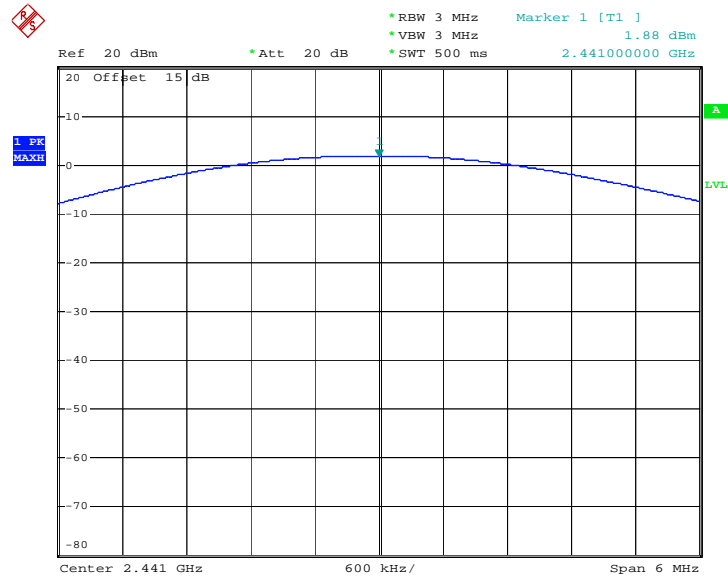

Date: 19.JAN.2013 18:28:14

Peak Output Power Plot on Channel 78

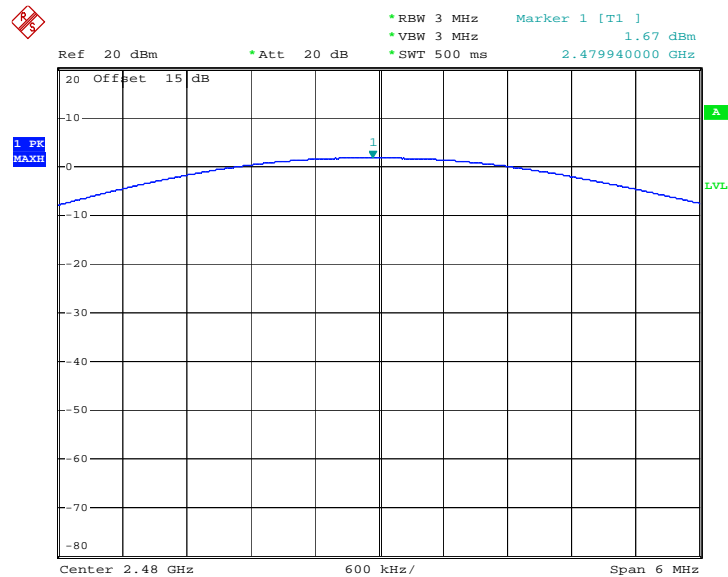

Date: 19.JAN.2013 18:29:29

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ($\geq 1\%$ span=30MHz), VBW = 300KHz (\geq RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


3.6.4 Test Setup

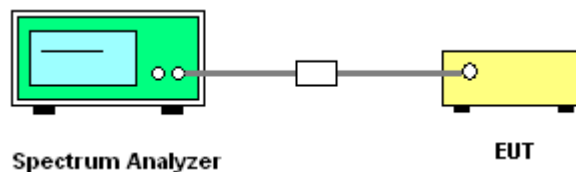

3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	20~21°C
Test Channel :	00 and 78	Relative Humidity :	40~41%
		Test Engineer :	Zhi Lu

Low Band Edge Plot on Channel 00

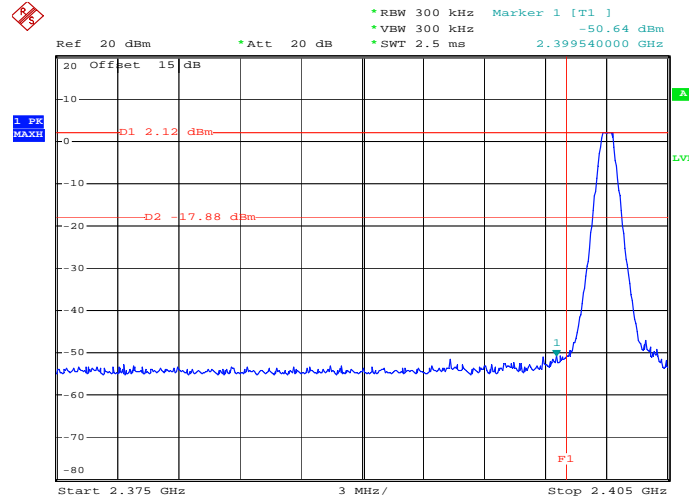

Date: 27.JAN.2013 00:18:31

High Band Edge Plot on Channel 78

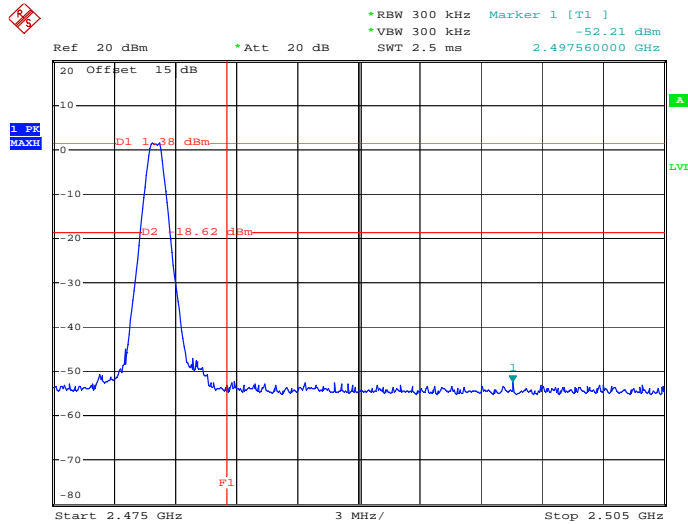


Date: 26.JAN.2013 23:02:46




Test Mode :	2Mbps	Temperature :	20~21°C
Test Channel :	00 and 78	Relative Humidity :	40~41%
		Test Engineer :	Zhi Lu

Low Band Edge Plot on Channel 00

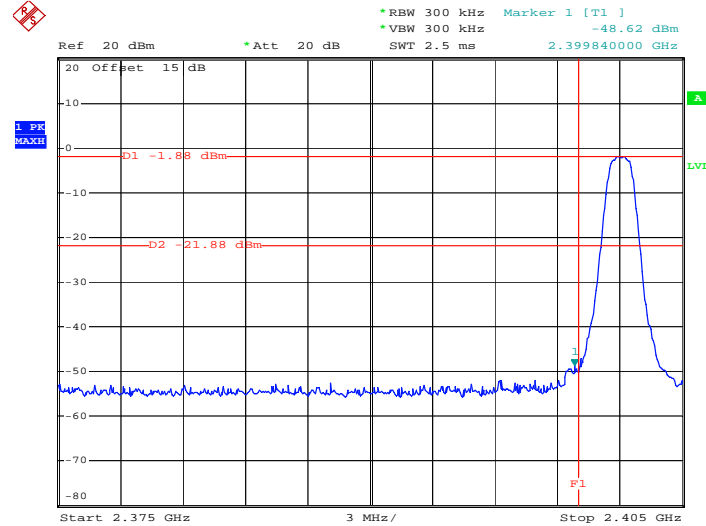

Date: 27.JAN.2013 01:04:53

High Band Edge Plot on Channel 78

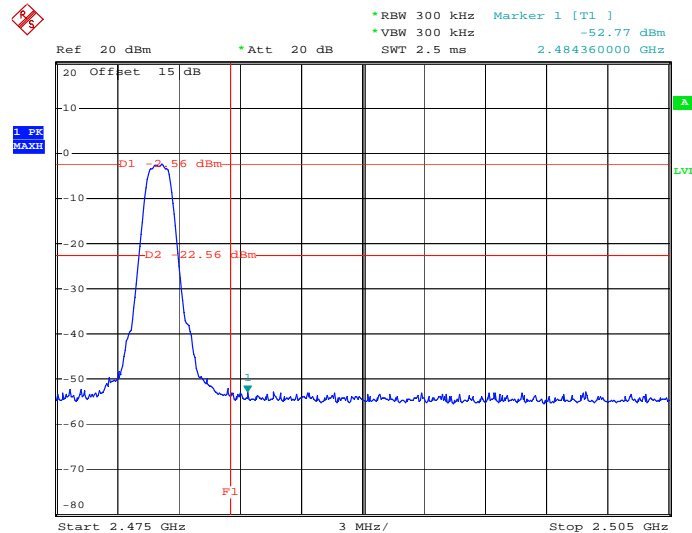


Date: 27.JAN.2013 01:06:30




Test Mode :	3Mbps	Temperature :	20~21°C
Test Channel :	00 and 78	Relative Humidity :	40~41%
		Test Engineer :	Zhi Lu

Low Band Edge Plot on Channel 00

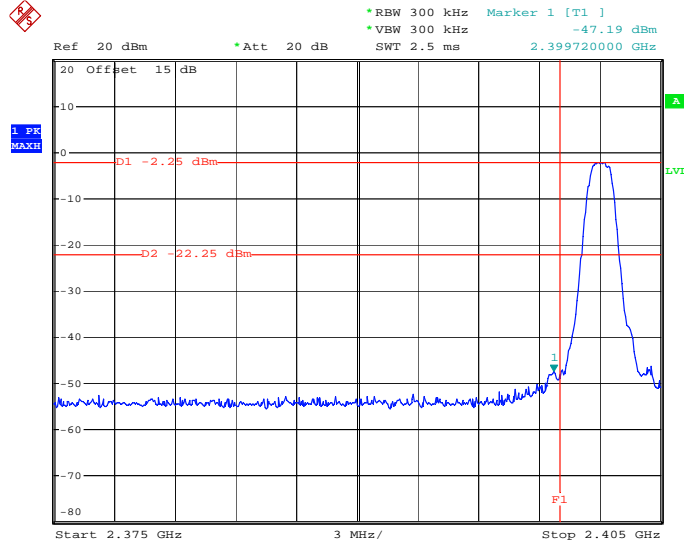

Date: 4.FEB.2013 16:50:15

High Band Edge Plot on Channel 78

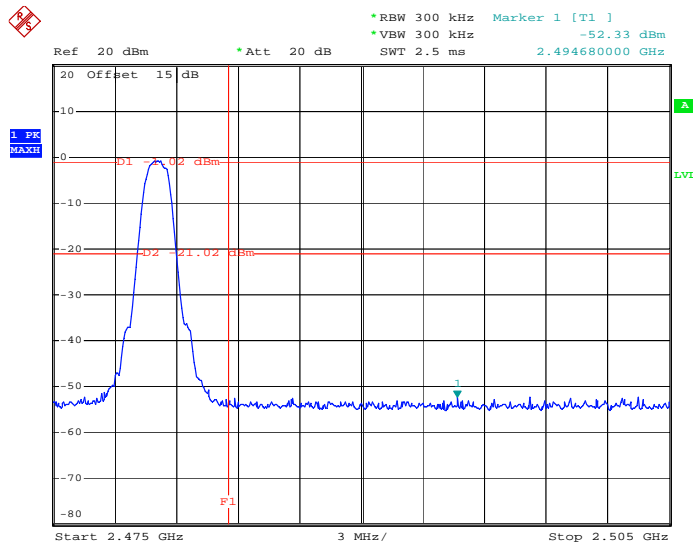


Date: 3.FEB.2013 18:52:39

3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Hopping Mode Low Band Edge Plot on Channel 00

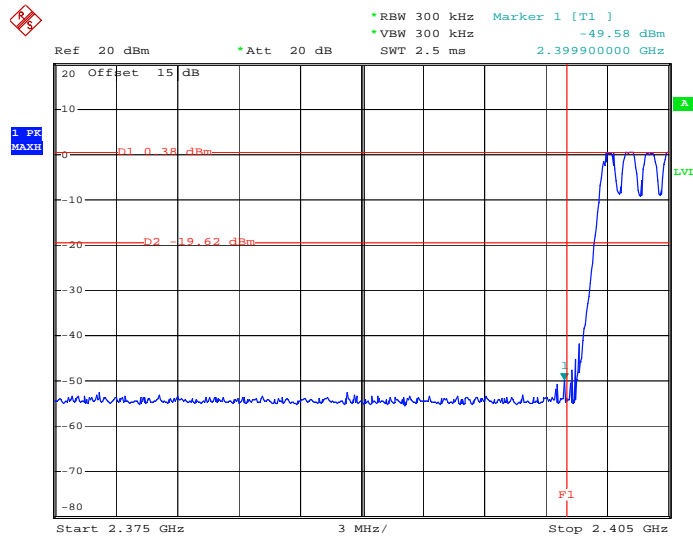

Date: 3.FEB.2013 19:00:24

Hopping Mode High Band Edge Plot on Channel 78

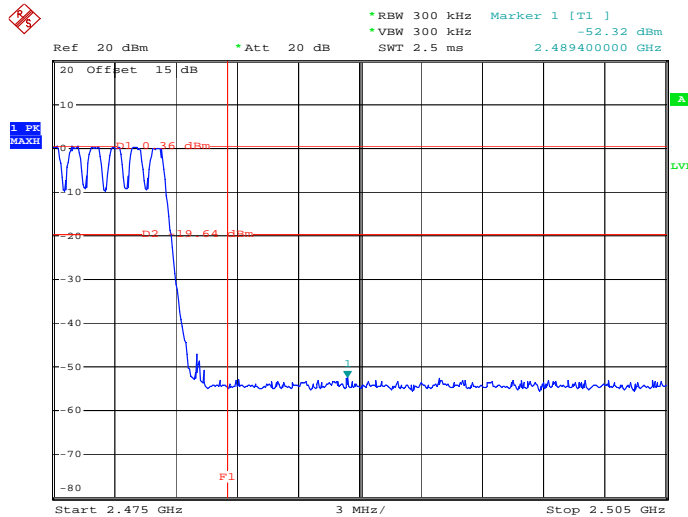


Date: 3.FEB.2013 18:59:05




Test Mode :	2Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Hopping Mode Low Band Edge Plot on Channel 00

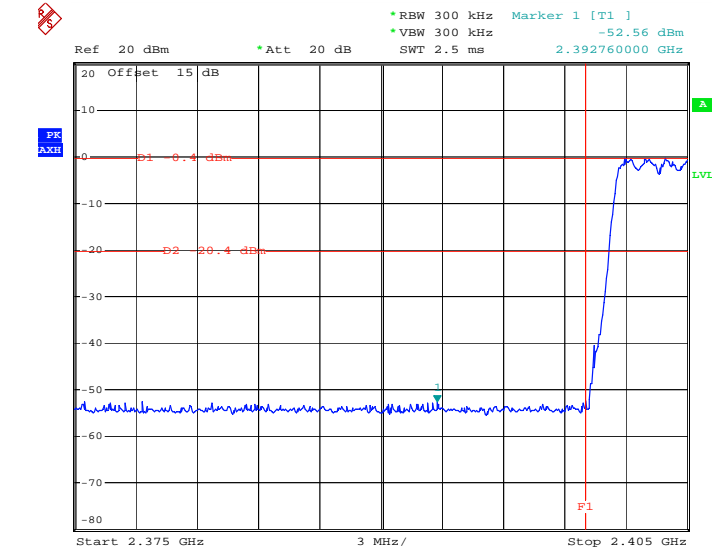

ate: 3.FEB.2013 19:01:57

Hopping Mode High Band Edge Plot on Channel 78

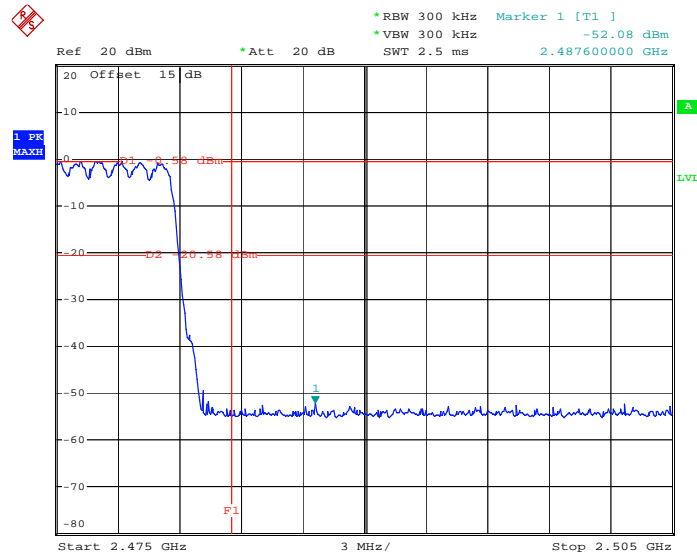


Date: 3.FEB.2013 18:58:04




Test Mode :	3Mbps	Temperature :	20~21°C
Test Engineer :	Zhi Lu	Relative Humidity :	40~41%

Hopping Mode Low Band Edge Plot on Channel 00

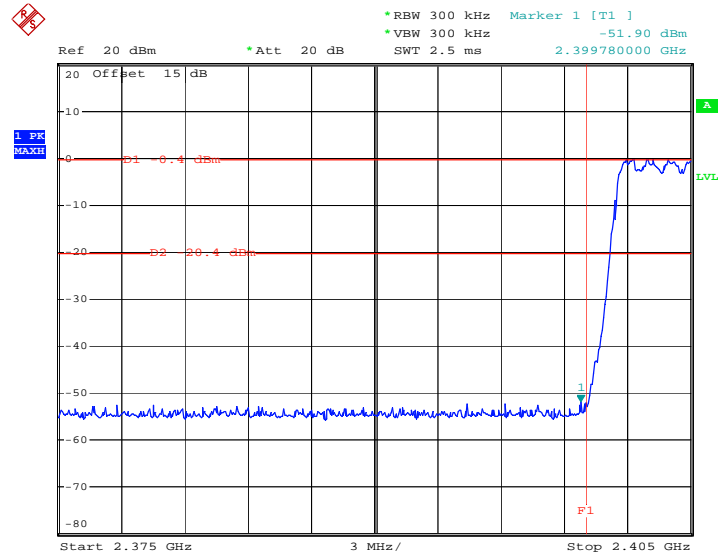

Date: 3.FEB.2013 19:03:06

Hopping Mode High Band Edge Plot on Channel 78

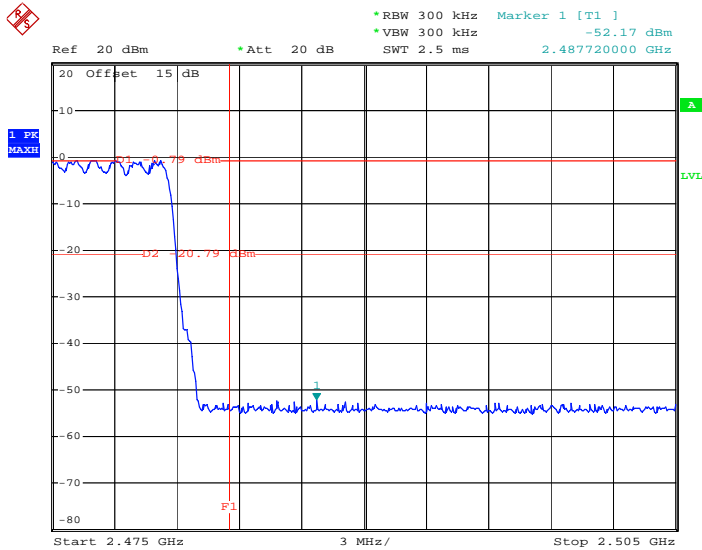

Date: 3.FEB.2013 18:57:06

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Measure and record the results in the test report.


3.7.4 Test Setup

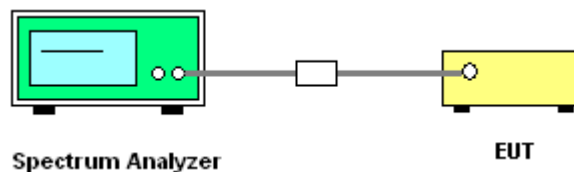

3.7.5 Test Results


Test Mode :	1Mbps	Temperature :	20~21°C
Test Channel :	00	Relative Humidity :	40~41%
		Test Engineer :	Zhi Lu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

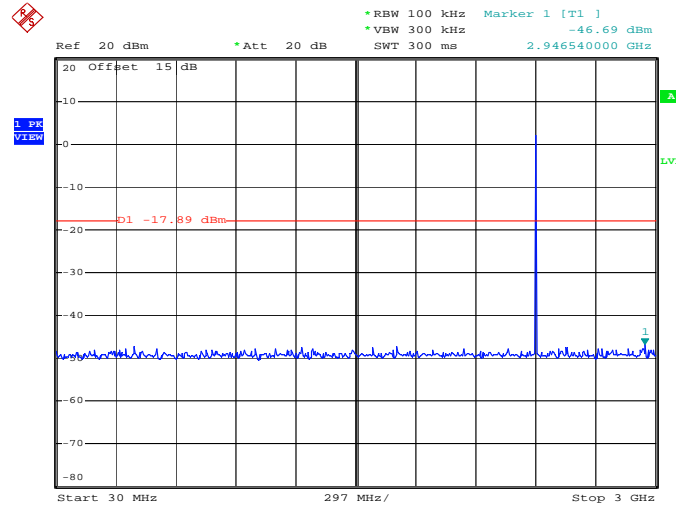

Date: 26.JAN.2013 23:12:55

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

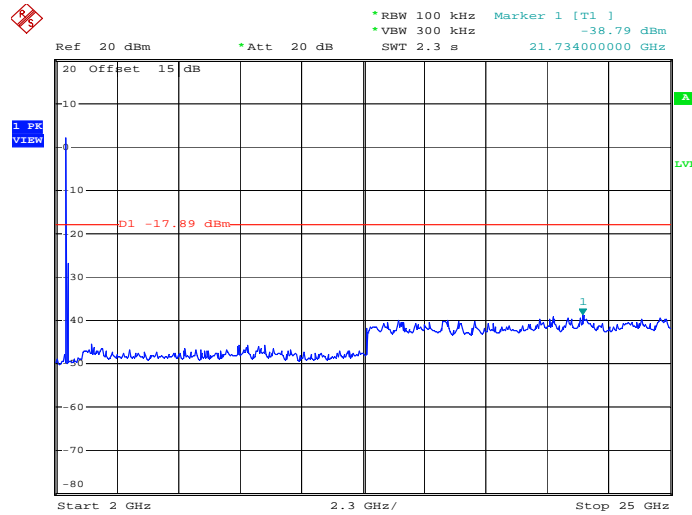


Date: 27.JAN.2013 00:29:56




Test Mode :	1Mbps	Temperature :	20~21°C
Test Channel :	39	Relative Humidity :	40~41%
		Test Engineer :	Zhi Lu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

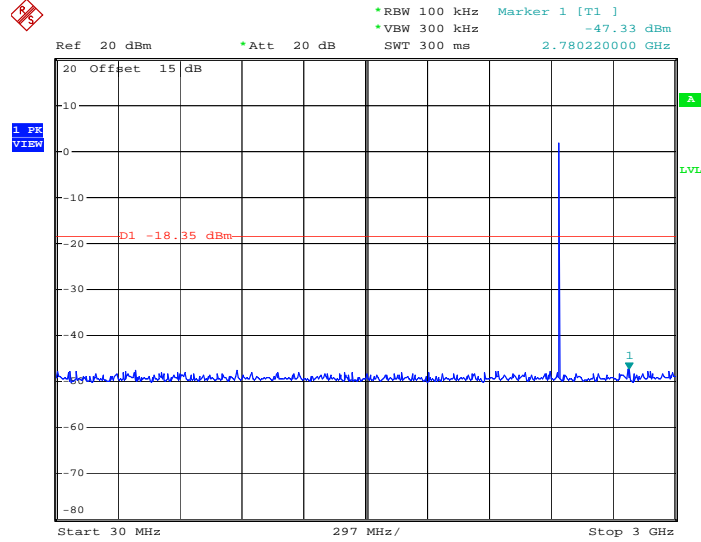

Date: 26.JAN.2013 23:13:59

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

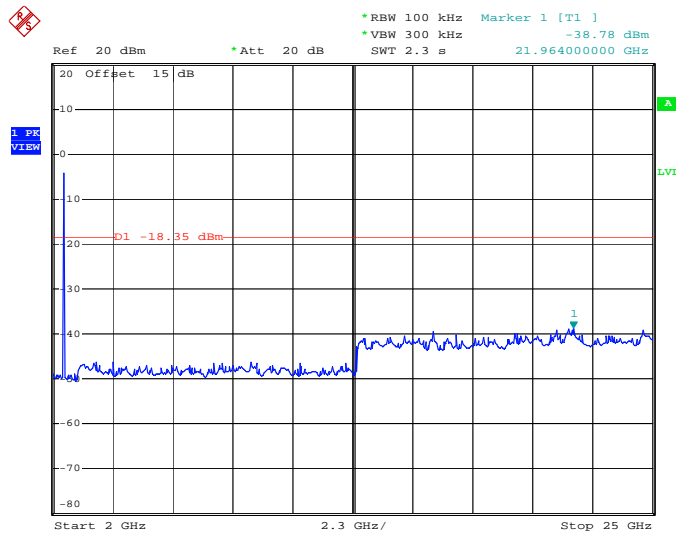


Date: 27.JAN.2013 00:30:47




Test Mode :	1Mbps	Temperature :	20~21°C
Test Channel :	78	Relative Humidity :	40~41%
		Test Engineer :	Zhi Lu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

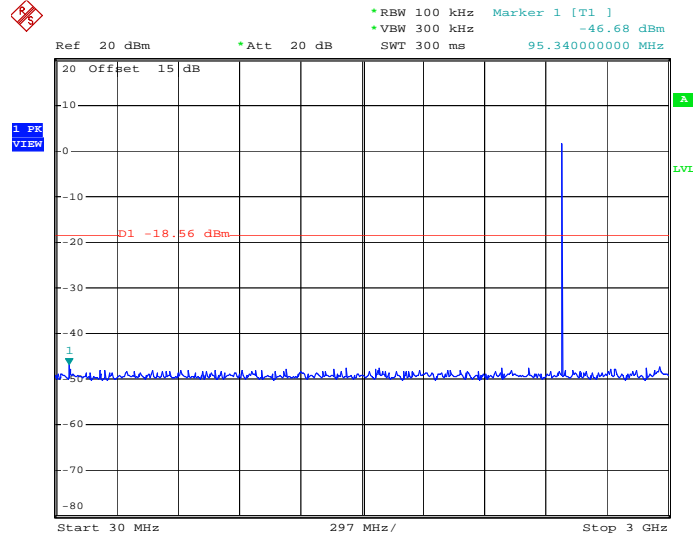

Date: 26.JAN.2013 23:15:04

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

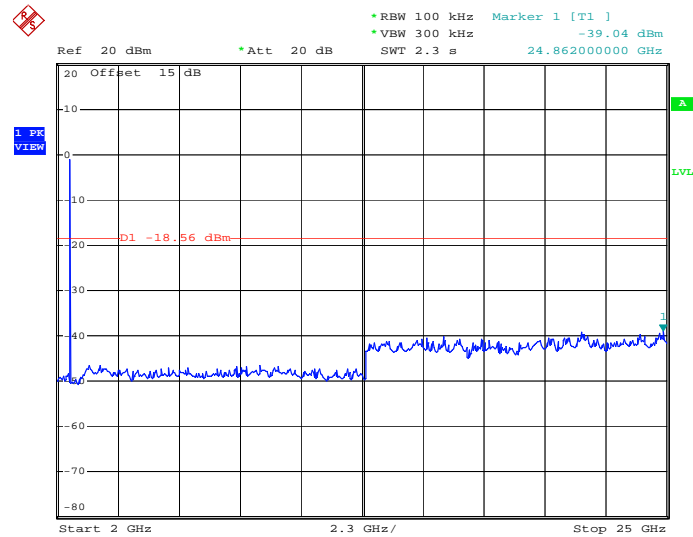

Date: 27.JAN.2013 00:31:27

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
8. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.85dB) derived from $20 \log(\text{dwell time}/100\text{ms})$.

3.8.4 Test Setup


For radiated emissions below 30MHz

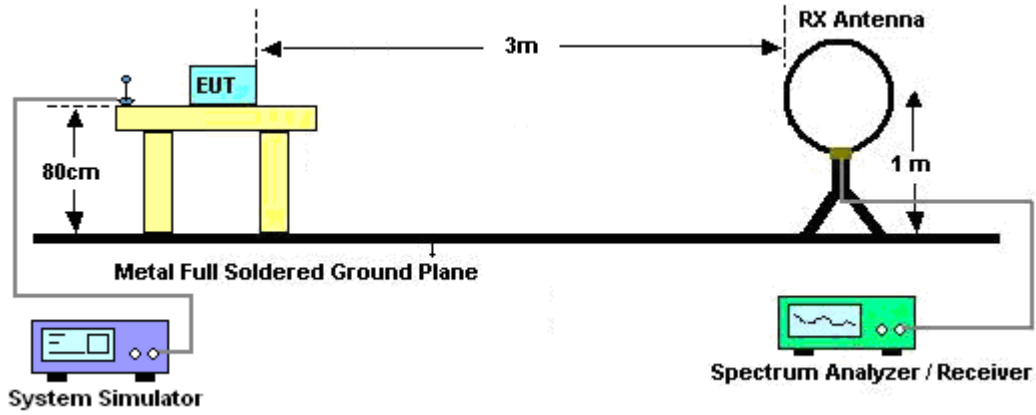

For radiated emissions from 30MHz to 1GHz

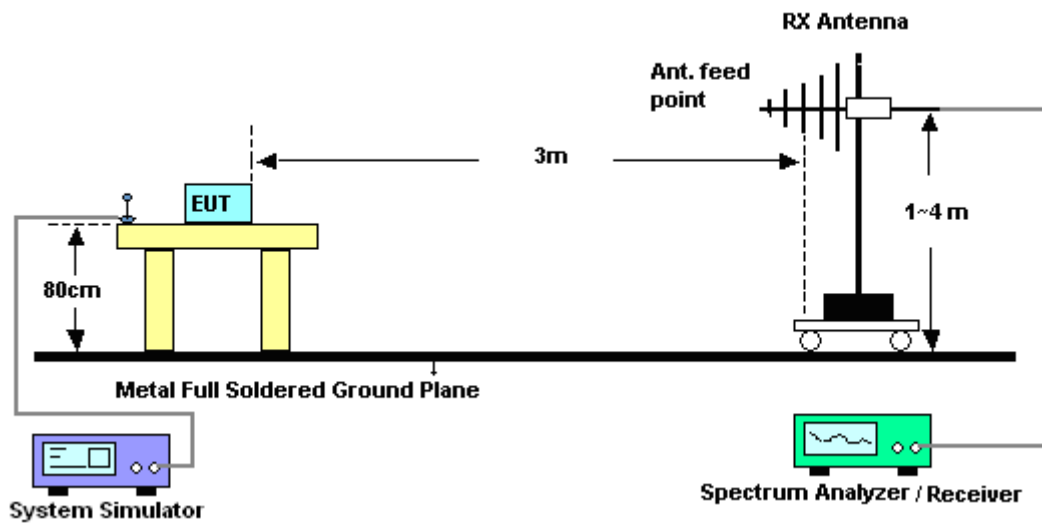

For radiated emissions above 1GHz

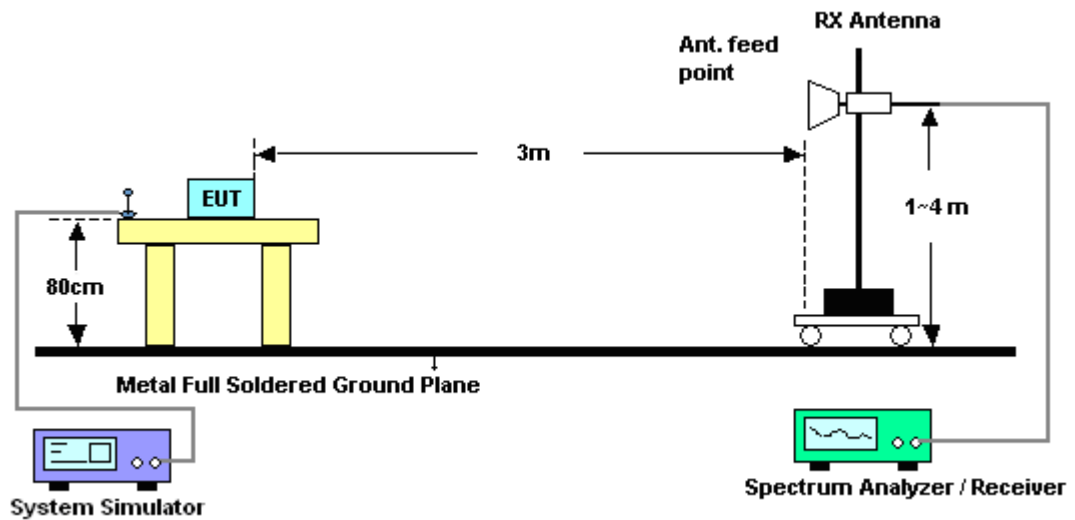


3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


3.8.6 Duty cycle correction factor for average measurement

DH5 on time/100ms (One Pulse) Plot on Channel 39

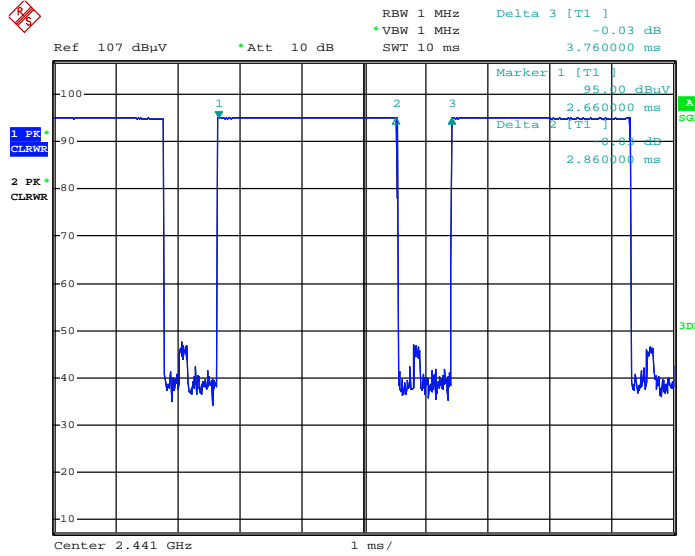

Date: 26.JAN.2013 06:24:39

DH5 on time/100ms (Count Pulses) Plot on Channel 39

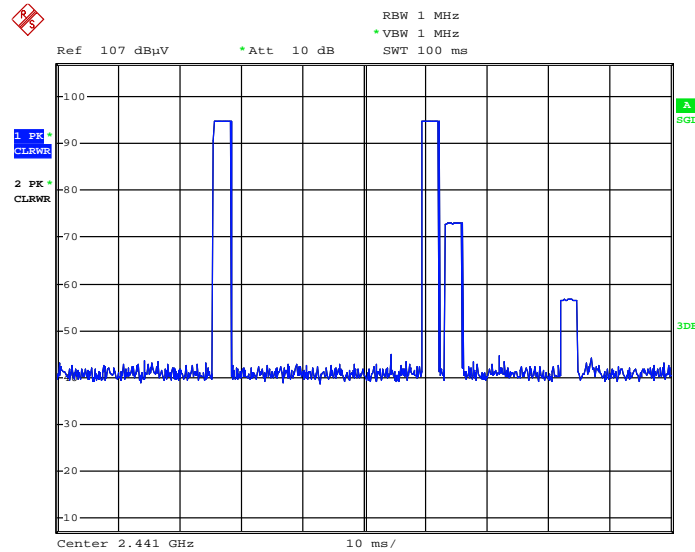

Date: 26.JAN.2013 06:28:24

Note:

1. Duty cycle = on time/100 milliseconds = $2 * 2.86 / 100 = 5.72 \%$
2. Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.85 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.



3.8.7 Test Result of Radiated Band Edges

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00 (in Laptop Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
		Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2323.95	50.8	-23.2	74	47.49	32.76	2.06	31.51	142	58	Peak
2323.95	25.95	-28.05	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2321.52	51.7	-22.3	74	48.39	32.76	2.06	31.51	145	345	Peak
2321.52	26.85	-27.15	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.85dB) derived from 20log (dwell time/100ms).

For example: Average level = 50.8dBuV/m – 24.85 (dB) = 25.95dBuV/m.

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78 (in Laptop Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
		Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	56.46	-17.54	74	52.8	33.01	2.16	31.51	142	128	Peak
2483.5	31.61	-22.39	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	62.01	-11.99	74	58.35	33.01	2.16	31.51	136	299	Peak
2483.5	37.16	-16.84	54	-	-	-	-	-	-	Average



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78 (in Tablet Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
		Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	59.15	-14.85	74	55.49	33.01	2.16	31.51	200	66	Peak
2483.5	34.30	-19.70	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	54.47	-19.53	74	50.81	33.01	2.16	31.51	200	198	Peak
2483.5	29.62	-24.38	54	-	-	-	-	-	-	Average

3.8.8 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

NOTE: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00 (in Laptop Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7206 MHz are not within a restricted bands, and its limit lines are 20dB below the highest emission level. For example, 99.33 dBuV/m - 20dB = 79.33 dBuV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	61.89	-17.44	79.33	58.43	32.86	2.11	31.51	142	58	Peak
2402	99.33	-	-	95.87	32.86	2.11	31.51	100	0	Peak
2402	74.48	-	-	-	-	-	-	100	0	Average
4804	48.22	-25.78	74	41.51	35.17	3.08	31.54	100	123	Peak
4804	23.37	-30.63	54	-	-	-	-	100	123	Average
7206	49.68	-29.65	79.33	41.24	36.16	3.24	30.96	120	45	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00 (in Laptop Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7206 MHz are not within a restricted bands, and its limit lines are 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	66.94	-17.79	84.73	63.48	32.86	2.11	31.51	145	345	Peak
2402	104.73	-	-	101.27	32.86	2.11	31.51	100	0	Peak
2402	79.88	-	-	-	-	-	-	100	0	Average
4804	49.51	-24.49	74	42.8	35.17	3.08	31.54	100	231	Peak
4804	24.66	-29.34	54	-	-	-	-	100	231	Average
7206	49.6	-35.13	84.73	41.16	36.16	3.24	30.96	102	45	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	39 (in Laptop Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	97.7	-	-	94.12	32.95	2.14	31.51	100	254	Peak
2441	72.85	-	-	-	-	-	-	100	254	Average
4882	49.24	-24.76	74	42.46	35.18	3.12	31.52	103	167	Peak
4882	24.39	-29.61	54	-	-	-	-	103	167	Average
7323	49.73	-24.27	74	41.25	36.21	3.21	30.94	100	0	Peak
7323	24.88	-29.12	54	-	-	-	-	100	0	Average

Note: Other harmonics are lower than background noise.

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	39 (in Laptop Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	103.85	-	-	100.27	32.95	2.14	31.51	102	175	Peak
2441	79	-	-	-	-	-	-	102	175	Average
4882	48.41	-25.59	74	41.63	35.18	3.12	31.52	102	47	Peak
4882	23.56	-30.44	54	-	-	-	-	102	47	Average
7323	49.6	-24.4	74	41.12	36.21	3.21	30.94	200	167	Peak
7323	24.75	-29.25	54	-	-	-	-	200	167	Average

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78 (in Laptop Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
119.24	35.42	-8.08	43.5	56.59	11.8	0.63	33.6	100	241	Peak
239.52	35.76	-10.24	46	56.81	11.51	0.9	33.46	-	-	Peak
298.69	35.39	-10.61	46	54.79	12.99	0.99	33.38	-	-	Peak
741.98	35.96	-10.04	46	47.34	19.83	1.58	32.79	-	-	Peak
815.7	35.63	-10.37	46	46.62	20.02	1.64	32.65	-	-	Peak
960.23	33.85	-20.15	54	43.73	20.79	1.77	32.44	-	-	Peak
2480	94.75	-	-	91.09	33.01	2.16	31.51	100	0	Peak
2480	69.9	-	-	-	-	-	-	100	0	Average
4960	47.28	-26.72	74	40.43	35.2	3.16	31.51	115	266	Peak
4960	22.43	-31.57	54	-	-	-	-	115	266	Average
7440	49.24	-24.76	74	40.71	36.27	3.18	30.92	112	360	Peak
7440	24.39	-29.61	54	-	-	-	-	112	360	Average

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78 (in Laptop Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
119.24	31.95	-11.55	43.5	53.12	11.8	0.63	33.6	-	-	Peak
290.93	33.16	-12.84	46	52.69	12.87	0.98	33.38	-	-	Peak
398.6	34.74	-11.26	46	50.92	15.98	1.15	33.31	100	214	Peak
449.04	33.22	-12.78	46	48.93	16.3	1.2	33.21	-	-	Peak
667.29	33.94	-12.06	46	46.38	19.02	1.47	32.93	-	-	Peak
960.23	33.71	-20.29	54	43.59	20.79	1.77	32.44	-	-	Peak
2480	101.52	-	-	97.86	33.01	2.16	31.51	100	254	Peak
2480	76.67	-	-	-	-	-	-	100	254	Average
4960	47.22	-26.78	74	40.37	35.2	3.16	31.51	100	274	Peak
4960	22.37	-31.63	54	-	-	-	-	100	274	Average
7440	50	-24	74	41.47	36.27	3.18	30.92	126	255	Peak
7440	25.15	-28.85	54	-	-	-	-	126	255	Average

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78 (in Tablet Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	99.44	-	-	95.78	33.01	2.16	31.51	100	234	Peak
2480	74.59	-	-	-	-	-	-	100	234	Average
4960	46.71	-27.29	74	39.86	35.2	3.16	31.51	122	167	Peak
7440	49.23	-24.77	74	40.7	36.27	3.18	30.92	120	157	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78 (in Tablet Mode with Adapter 1 for Sample 1)	Relative Humidity :	41~42%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	94.62	-	-	90.96	33.01	2.16	31.51	100	231	Peak
2480	69.77	-	-	-	-	-	-	100	234	Average
4960	46.9	-27.1	74	40.05	35.2	3.16	31.51	100	30	Peak
7440	50.02	-23.98	74	41.49	36.27	3.18	30.92	102	355	Peak

Note: Other harmonics are lower than background noise.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

3.9.3 Test Procedures

1. The test follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.9.4 Test Setup

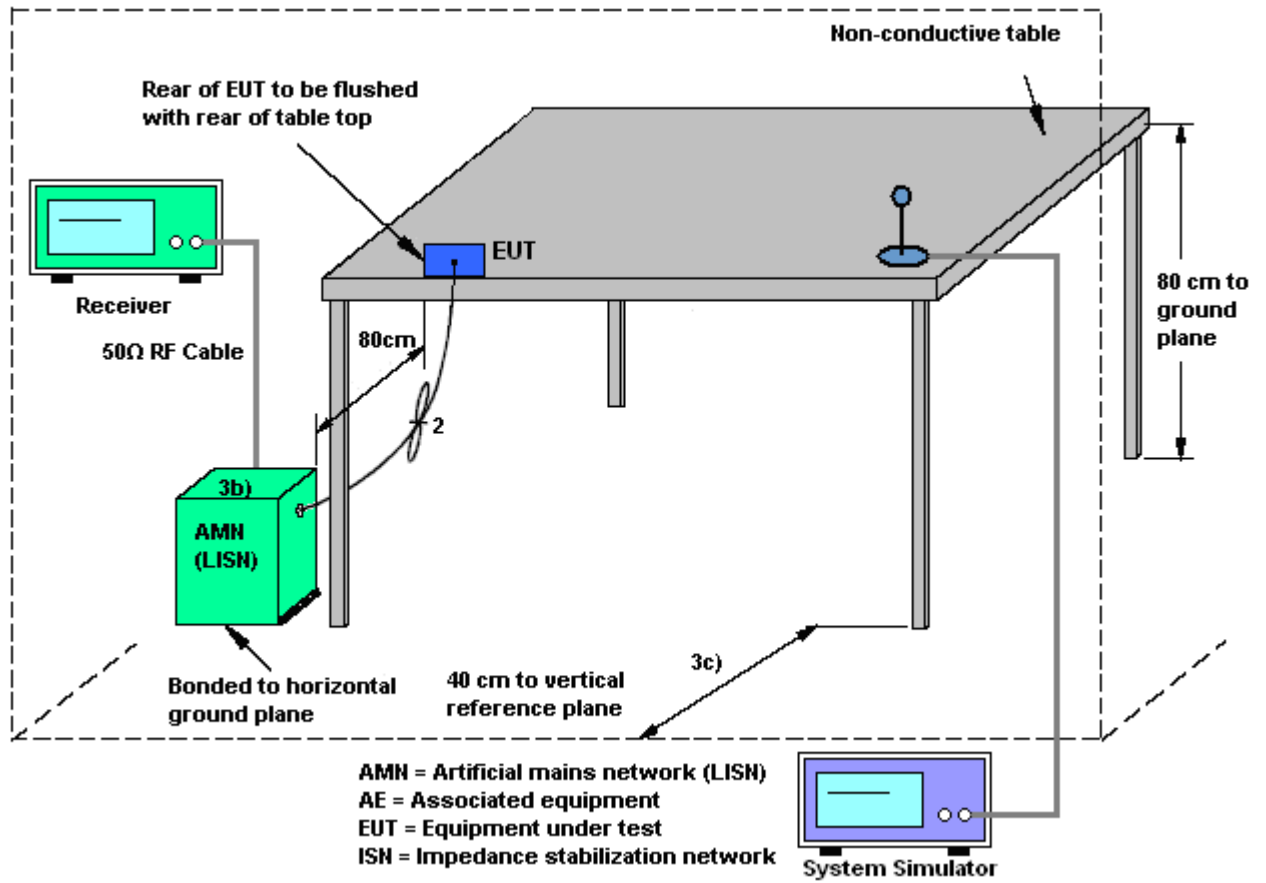



3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (2.4GHz) Link + Adapter 1 + TC for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

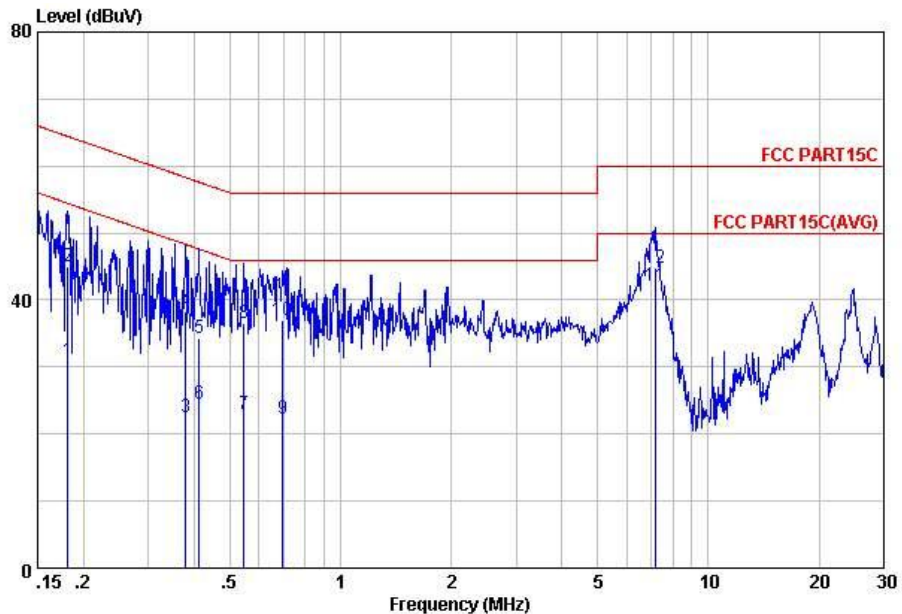


Site : C001-KS
 Condition: FCC PART15C LISN-111230 LINE

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	30.94	-23.48	54.42	20.80	-0.07	10.21	Average
2	0.18	44.94	-19.48	64.42	34.80	-0.07	10.21	QP
3	0.38	22.57	-25.73	48.30	12.40	-0.08	10.25	Average
4	0.38	38.27	-20.03	58.30	28.10	-0.08	10.25	QP
5	0.41	34.37	-23.22	57.59	24.20	-0.08	10.25	QP
6	0.41	24.47	-23.12	47.59	14.30	-0.08	10.25	Average
7	0.55	22.87	-23.13	46.00	12.69	-0.08	10.26	Average
8	0.55	36.47	-19.53	56.00	26.29	-0.08	10.26	QP
9	0.70	22.38	-23.62	46.00	12.20	-0.09	10.27	Average
10	0.70	36.88	-19.12	56.00	26.70	-0.09	10.27	QP
11	7.21	42.02	-7.98	50.00	31.80	-0.13	10.35	Average
12	7.21	44.82	-15.18	60.00	34.60	-0.13	10.35	QP



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (2.4GHz) Link + Adapter 1 + TC for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

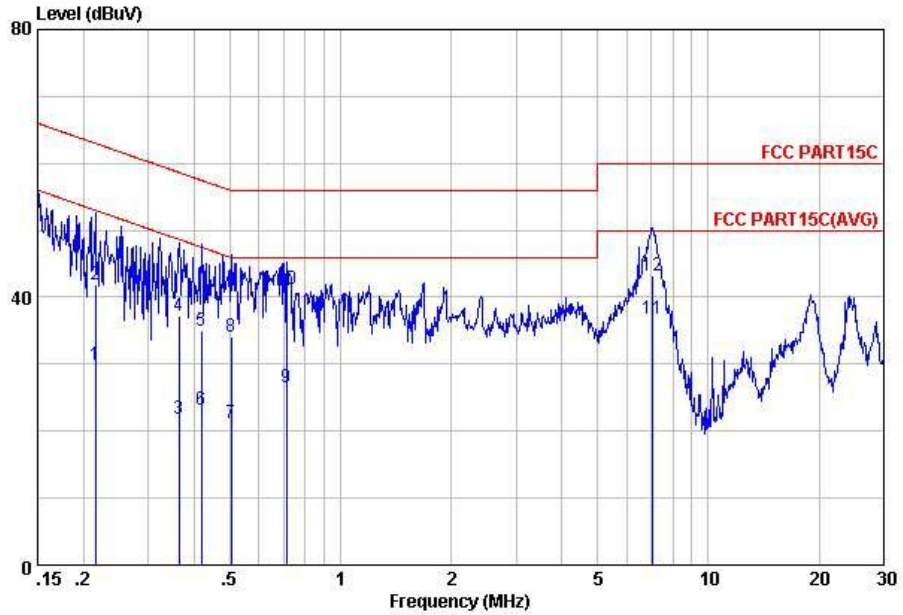

Site : C001-KS
 Condition: FCC PART15C LISN-111230 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.22	29.85	-23.16	53.01	19.70	-0.07	10.22	Average
2	0.22	41.85	-21.16	63.01	31.70	-0.07	10.22	QP
3	0.36	21.87	-26.78	48.65	11.70	-0.08	10.25	Average
4	0.36	37.27	-21.38	58.65	27.10	-0.08	10.25	QP
5	0.42	35.07	-22.39	57.46	24.90	-0.08	10.25	QP
6	0.42	23.07	-24.39	47.46	12.90	-0.08	10.25	Average
7	0.50	21.27	-24.73	46.00	11.10	-0.08	10.25	Average
8	0.50	34.07	-21.93	56.00	23.90	-0.08	10.25	QP
9	0.71	26.49	-19.51	46.00	16.30	-0.08	10.27	Average
10	0.71	41.19	-14.81	56.00	31.00	-0.08	10.27	QP
11	7.06	36.72	-13.28	50.00	26.50	-0.13	10.35	Average
12	7.06	43.12	-16.88	60.00	32.90	-0.13	10.35	QP



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

Non-standard connector used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	Jan. 19, 2013~ Feb. 04, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Jan. 19, 2013~ Feb. 04, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Jan. 19, 2013~ Feb. 04, 2013	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Jan. 19, 2013~ Feb. 04, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2012	Jan. 19, 2013~ Feb. 04, 2013	Aug. 16, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Jan. 17, 2013~ Jan. 26, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	Jun. 01, 2012	Jan. 17, 2013~ Jan. 26, 2013	May 31, 2013	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	Jan. 17, 2013~ Jan. 26, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/ 001	9 kHz~30 MHz	Jul. 03, 2012	Jan. 17, 2013~ Jan. 26, 2013	Jul. 02, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	1908/7/13	00075957	1GHz~18GHz	Jan. 06, 2013	Jan. 17, 2013~ Jan. 26, 2013	Jan. 05, 2014	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2012	Jan. 17, 2013~ Jan. 26, 2013	May 31, 2013	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	Jan. 17, 2013~ Jan. 26, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	Jan. 17, 2013~ Jan. 26, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	Jan. 17, 2013~ Jan. 26, 2013	Nov. 22, 2013	Radiation (03CH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2012	Jan. 17, 2013~ Jan. 26, 2013	Aug. 16, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Feb. 25, 2013	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2012	Feb. 25, 2013	Dec. 28, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2012	Feb. 25, 2013	Dec. 28, 2013	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	Feb. 25, 2013	Nov. 14, 2013	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT


Please refer to Sporton report number EP2D1707 as below.

1. External Photograph of EUT

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

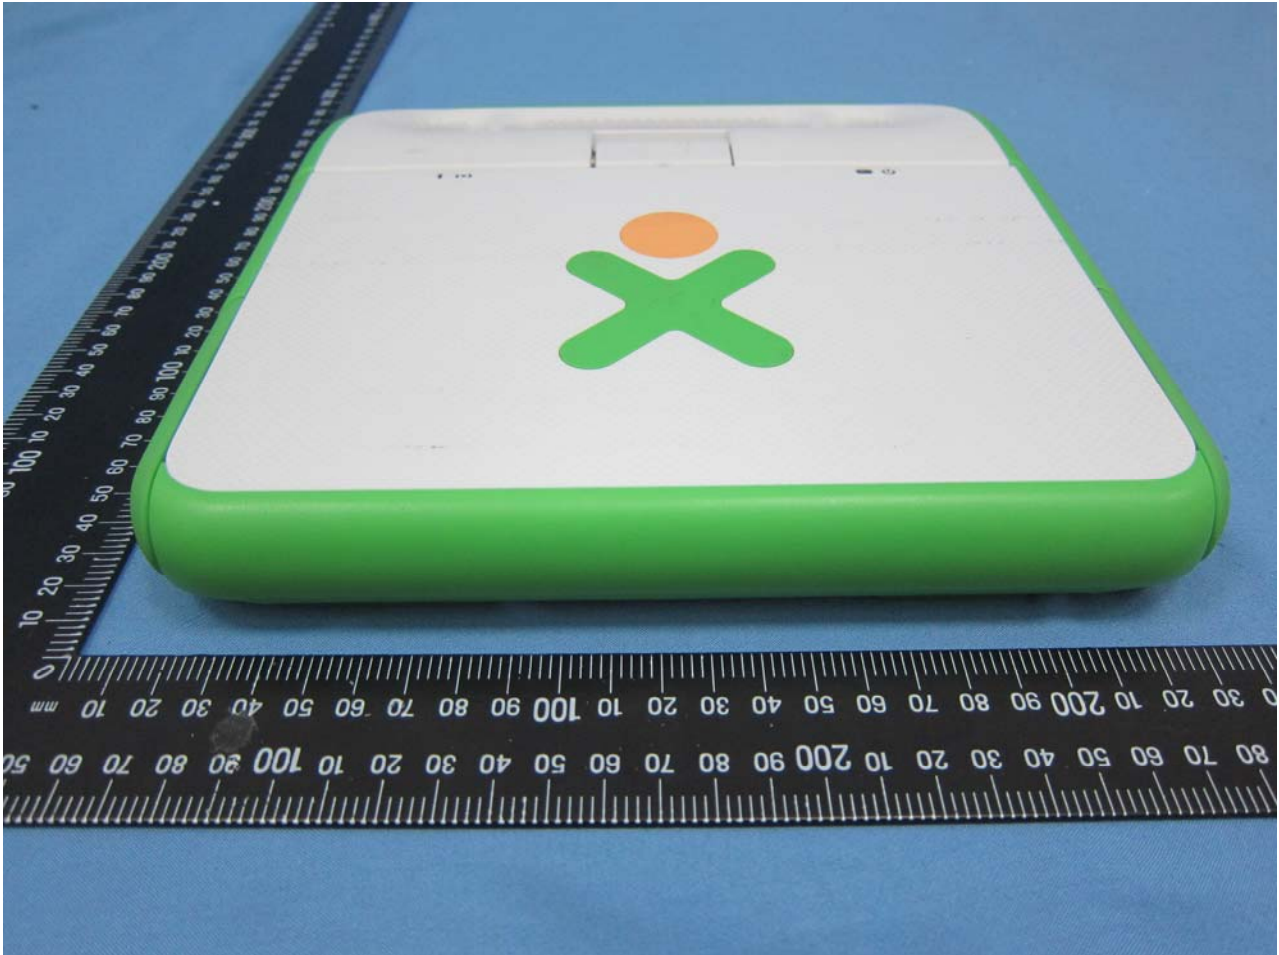

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

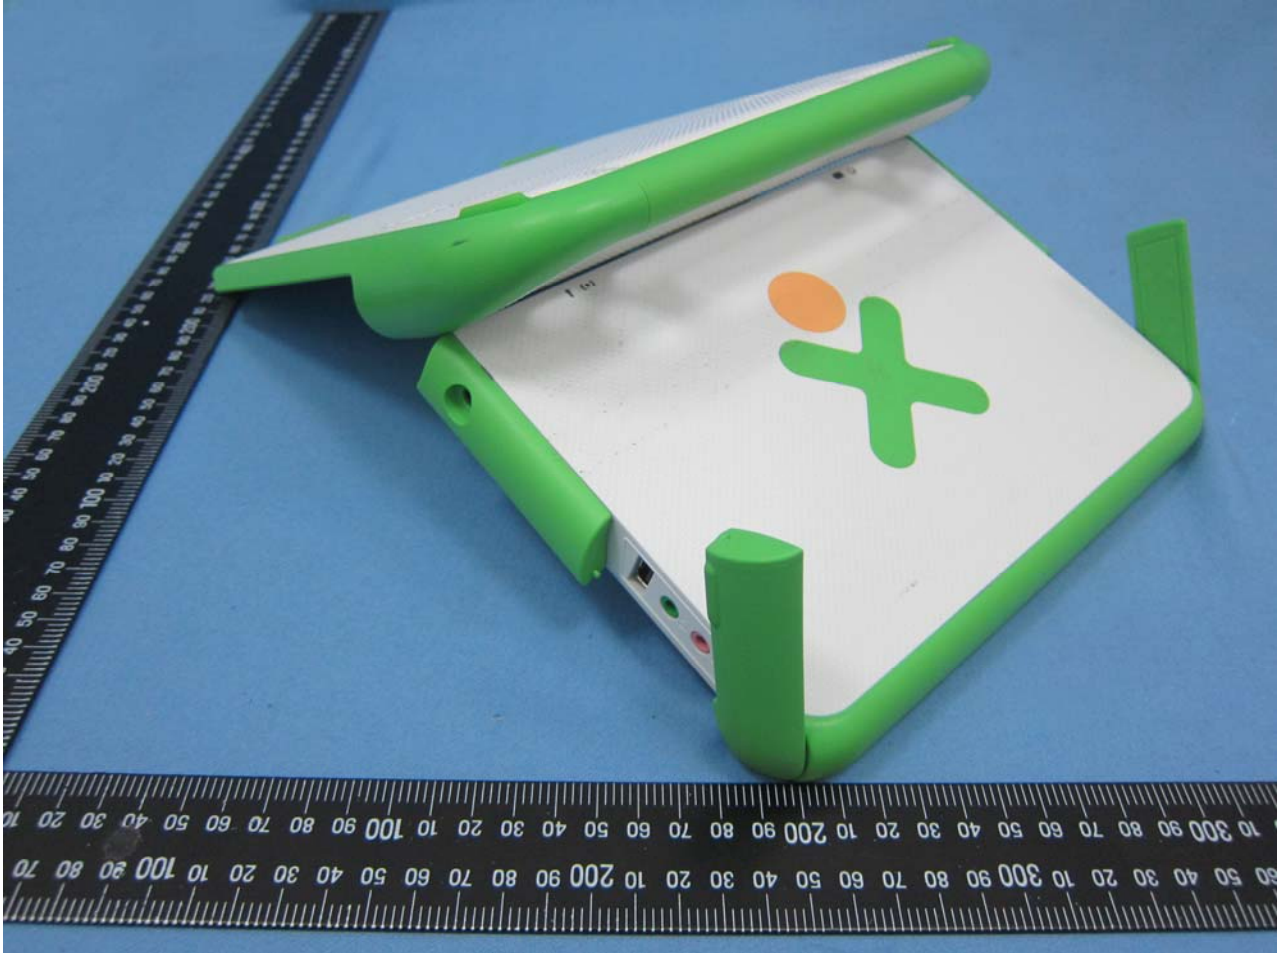

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

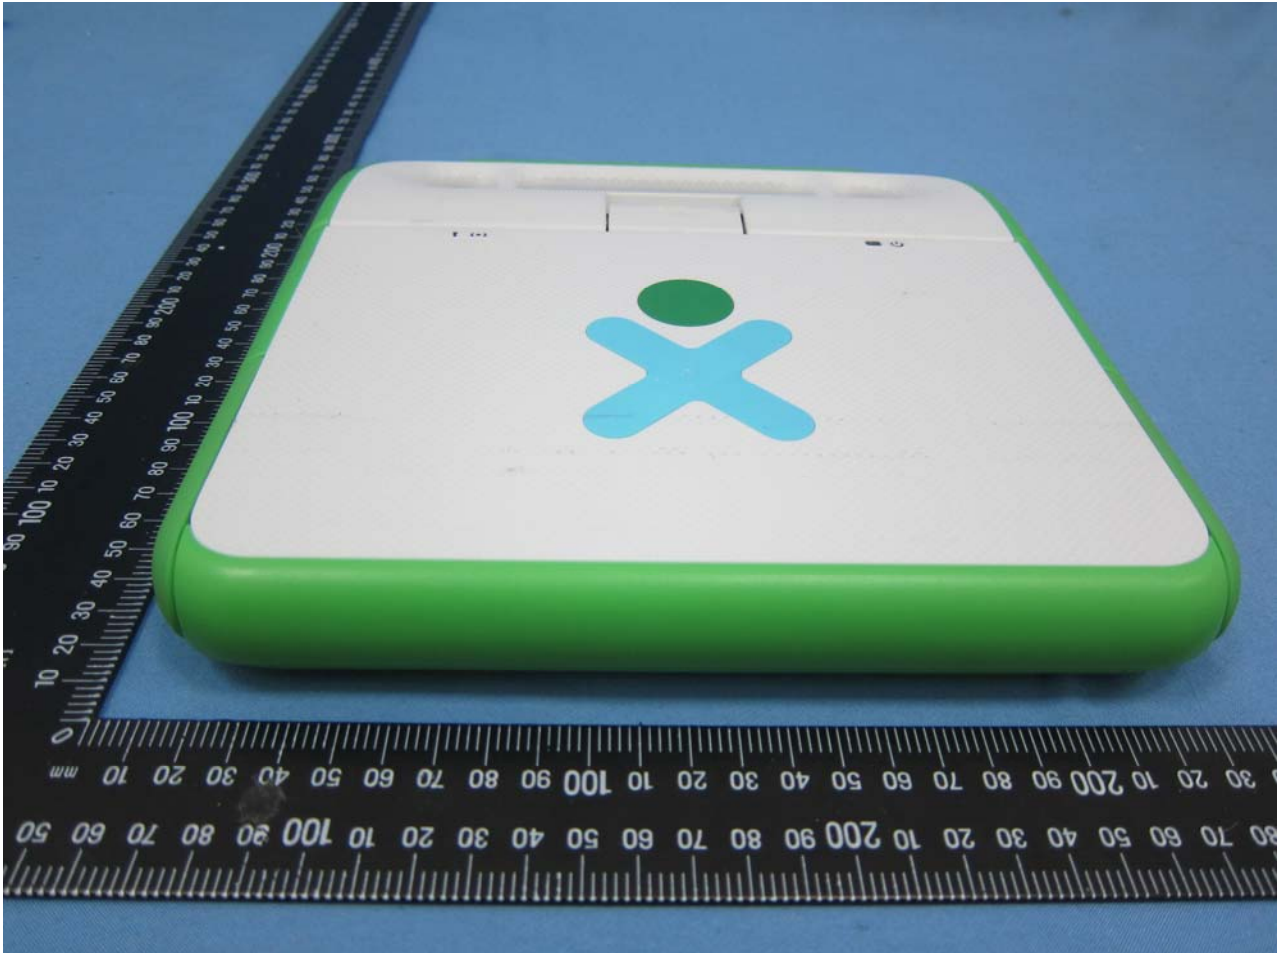

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

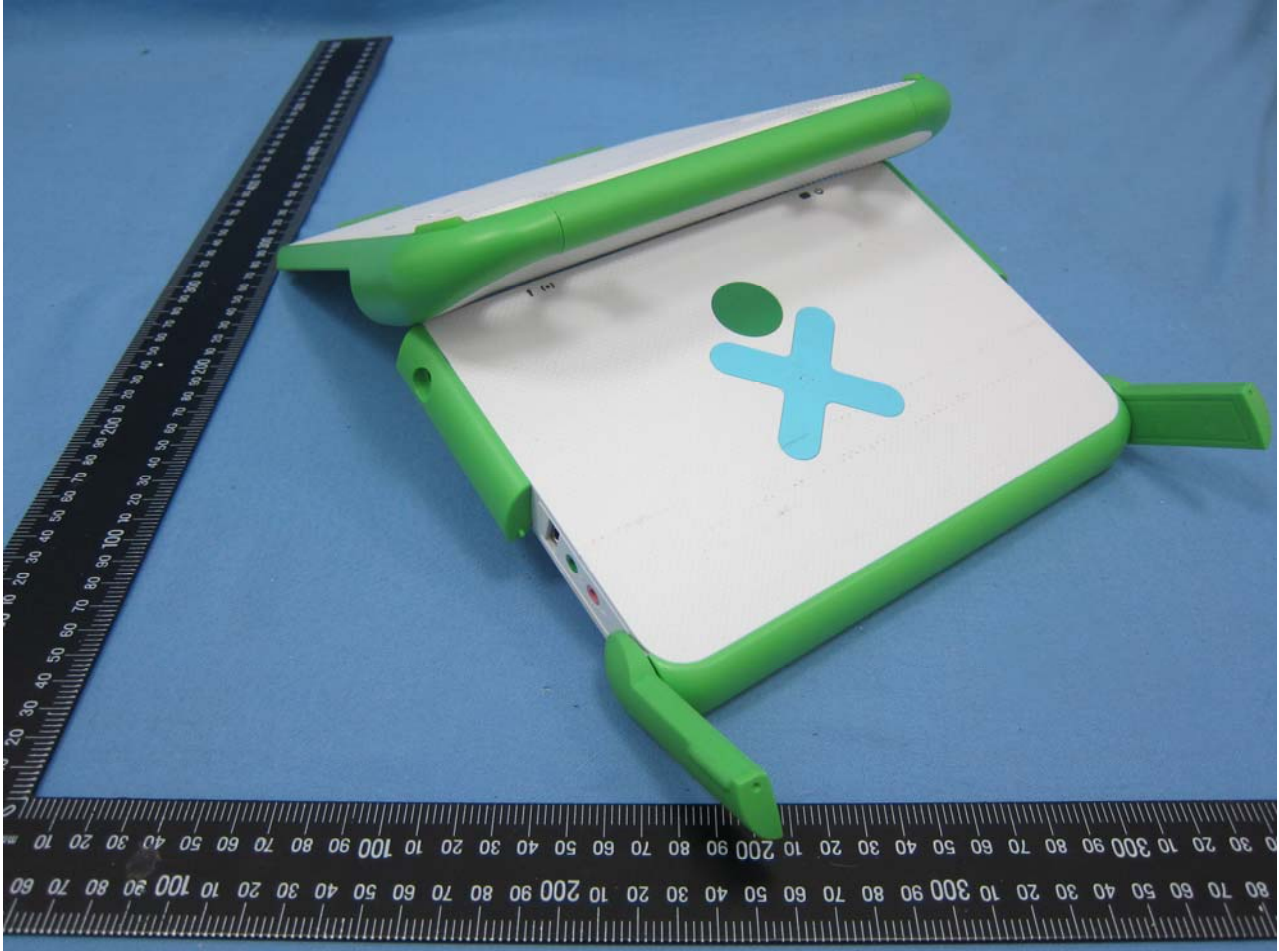

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

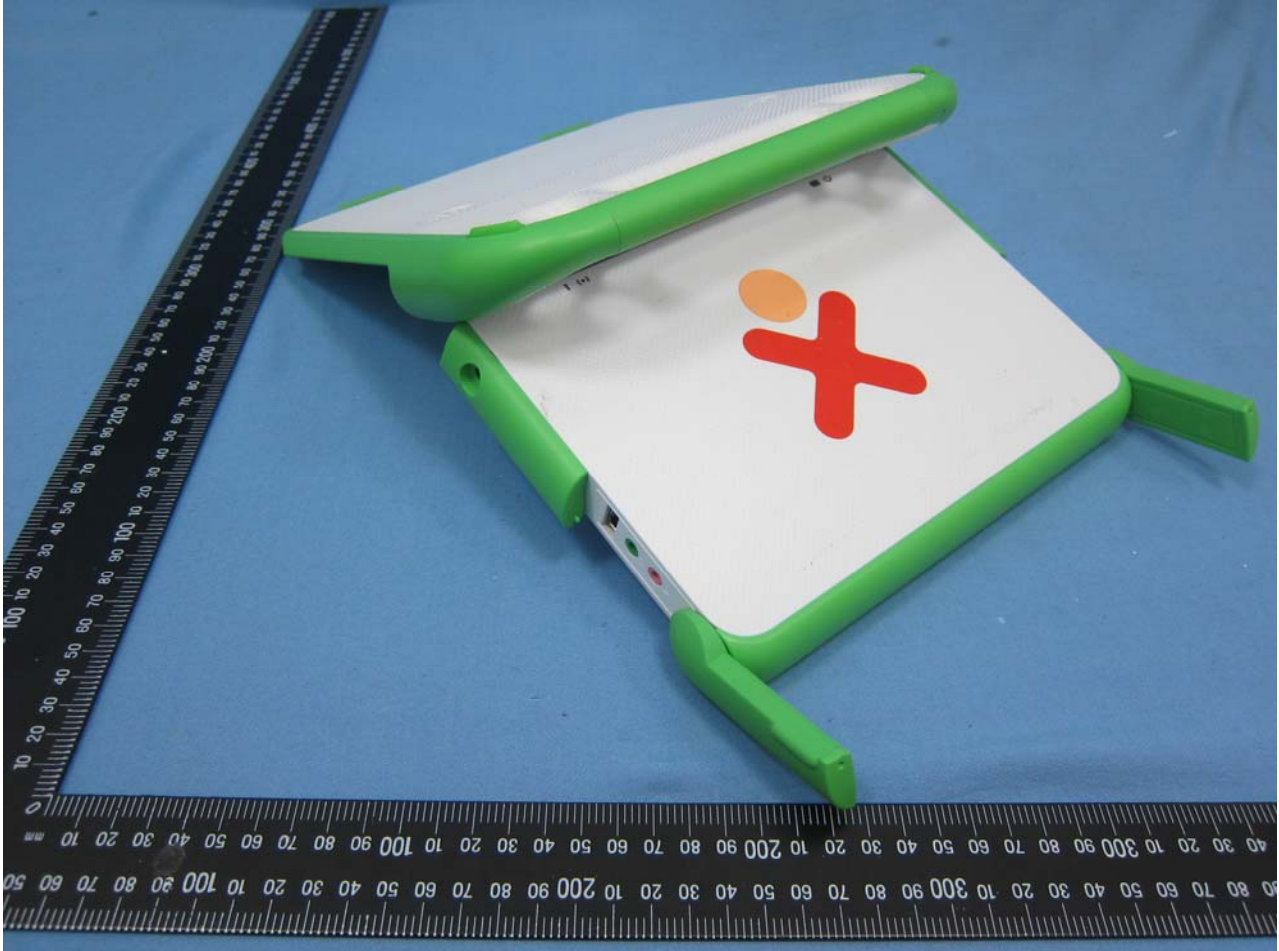

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS


Sample 4 for XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

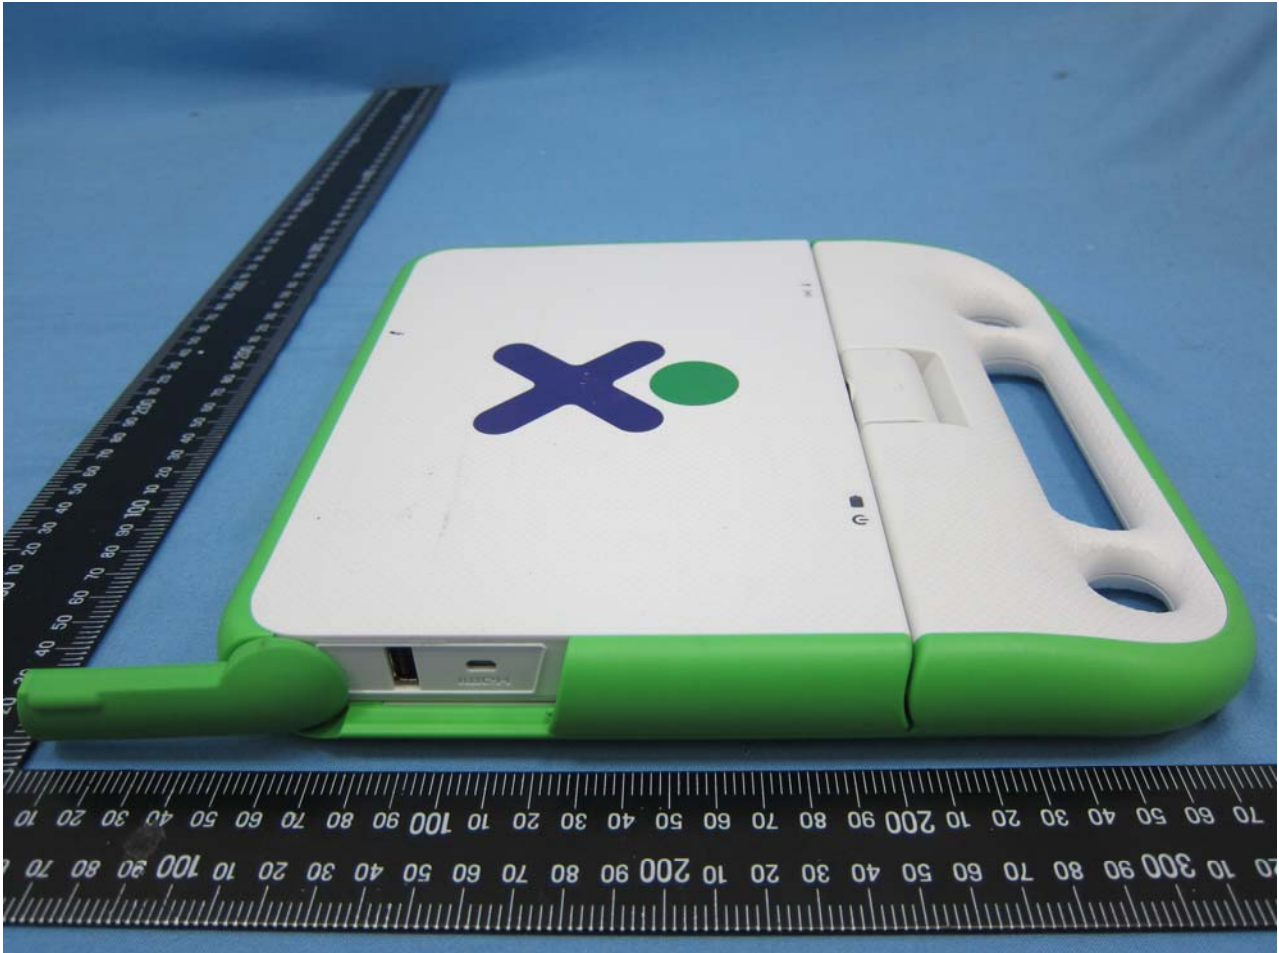

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

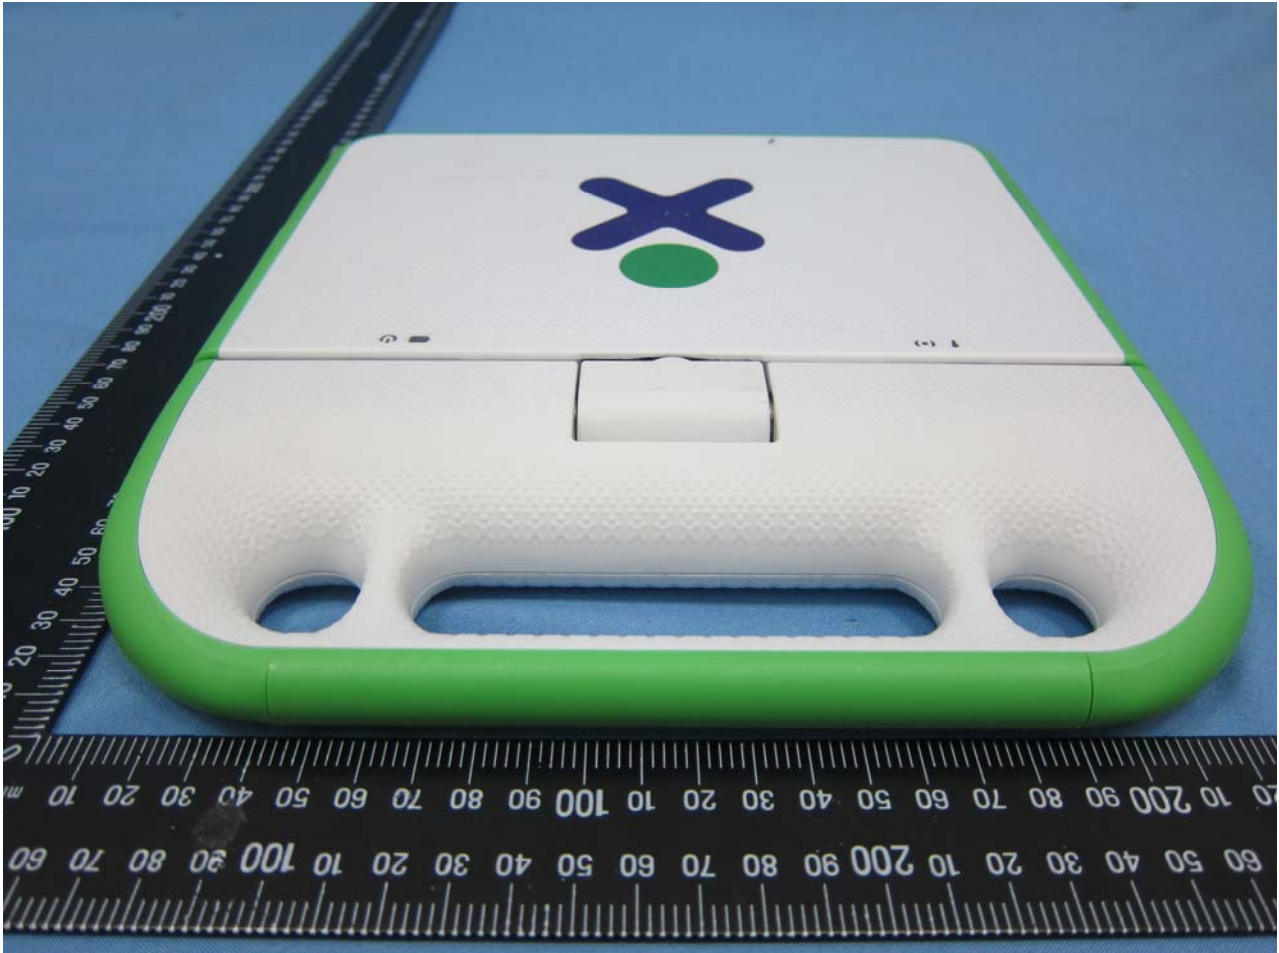

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

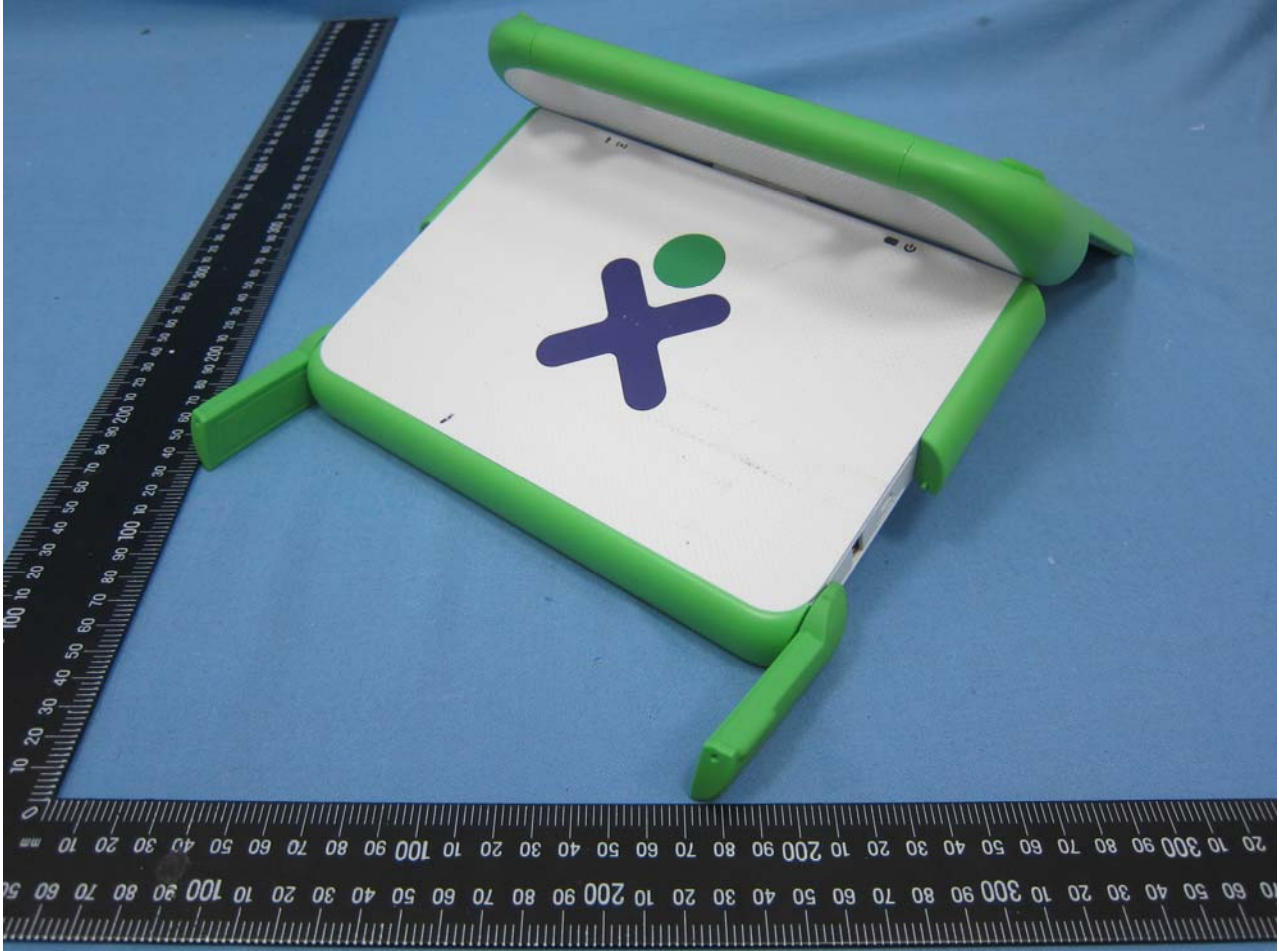

2. Photograph of Accessory

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

List of Accessory:

Specification of Accessory		
AC Adapter 1	Brand Name	DARFON
	Model Name	BB0J-C
AC Adapter 2	Brand Name	Bestec
	Model Name	NA0241WAA
AC Adapter 3	Brand Name	DARFON
	Model Name	BX24-1203(X=U or P)
AC Adapter 4	Brand Name	Bestec
	Model Name	BT-AG250SDF
Battery	Brand Name	OLPC
	Model Name	CL1

Remark: For accessories equipped with this EUT, please refer to the following photos.

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

Sample 2 for XO-4 HS Touch with All Adapters



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

Sample 3 for XO-4 with All Adapters



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

Sample 4 for XO-4 HS with All Adapters



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

AC Adapter 1



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

AC Adapter 2



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

AC Adapter 3



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

AC Adapter 4



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



3. Internal Photograph of EUT


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

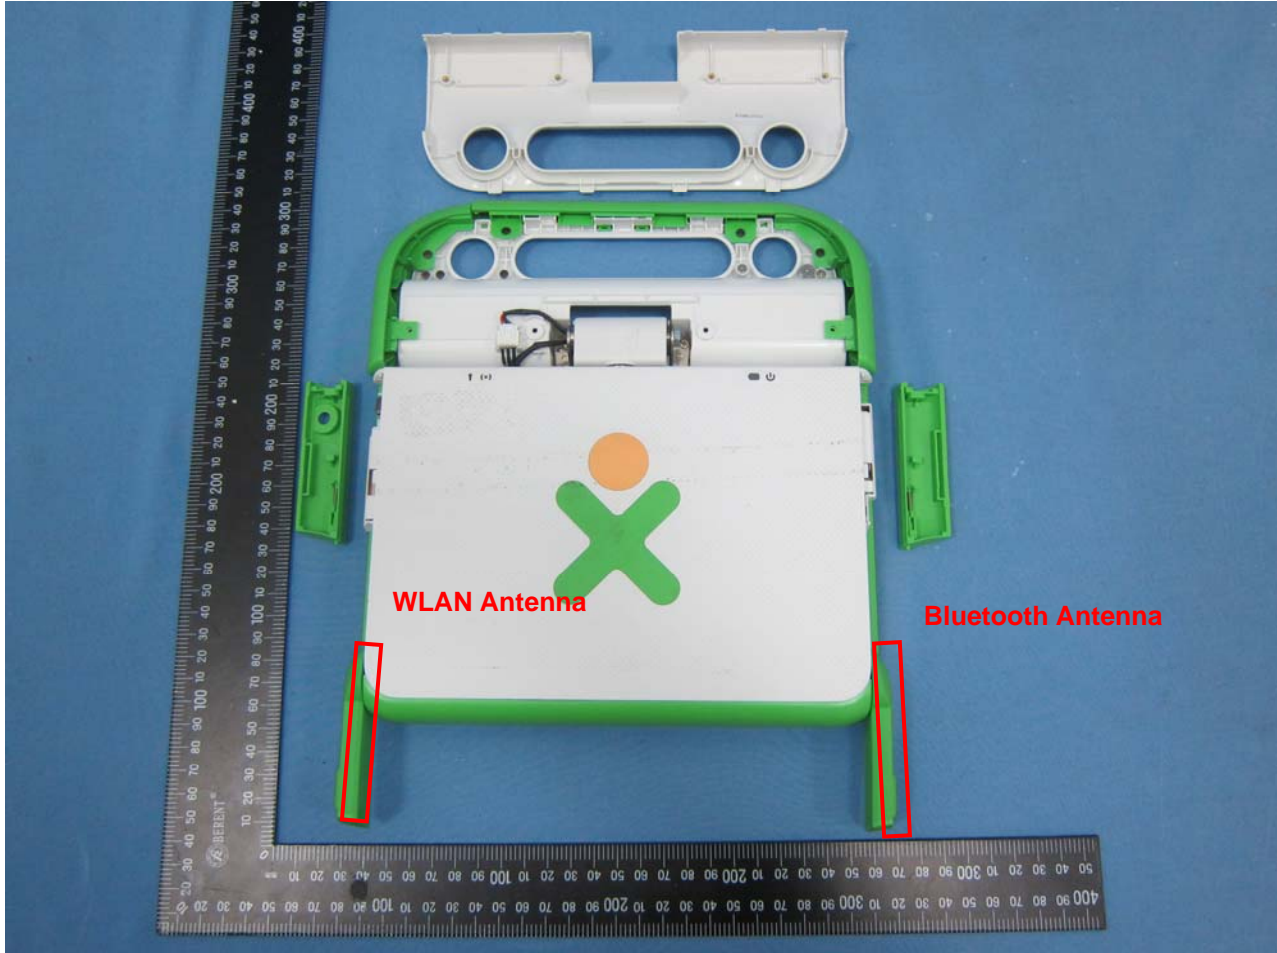

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

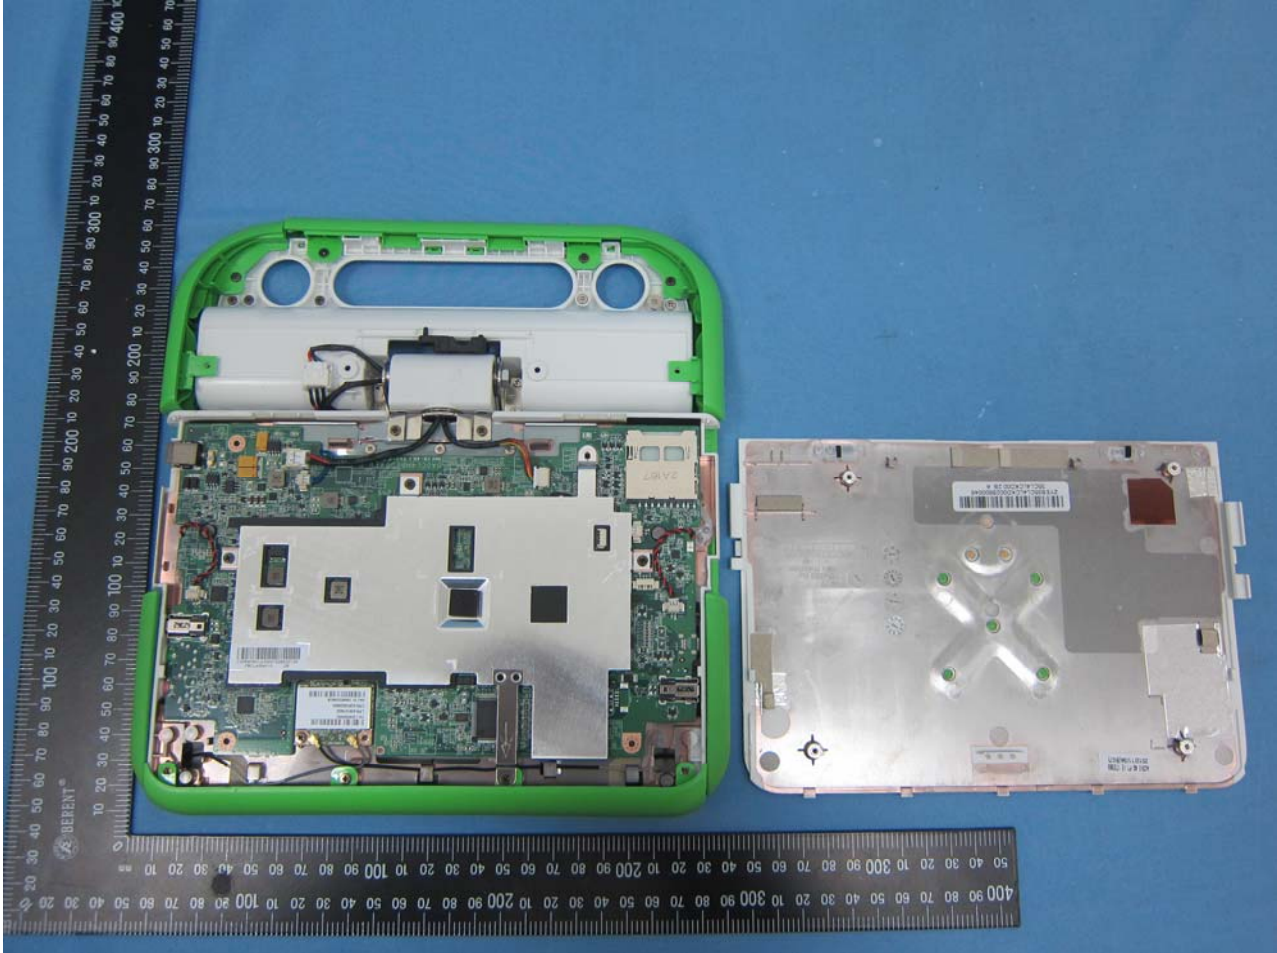


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

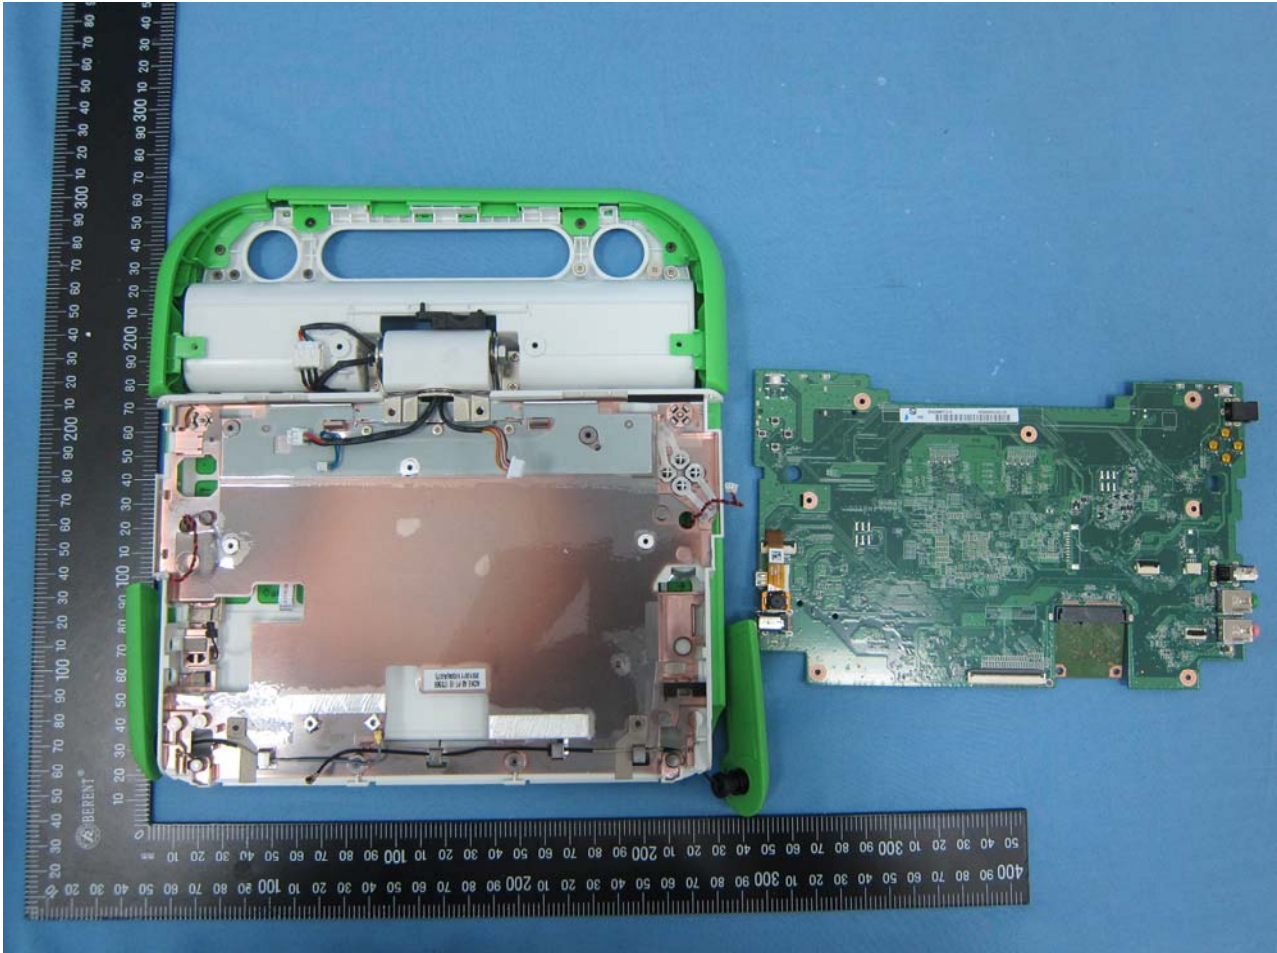


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

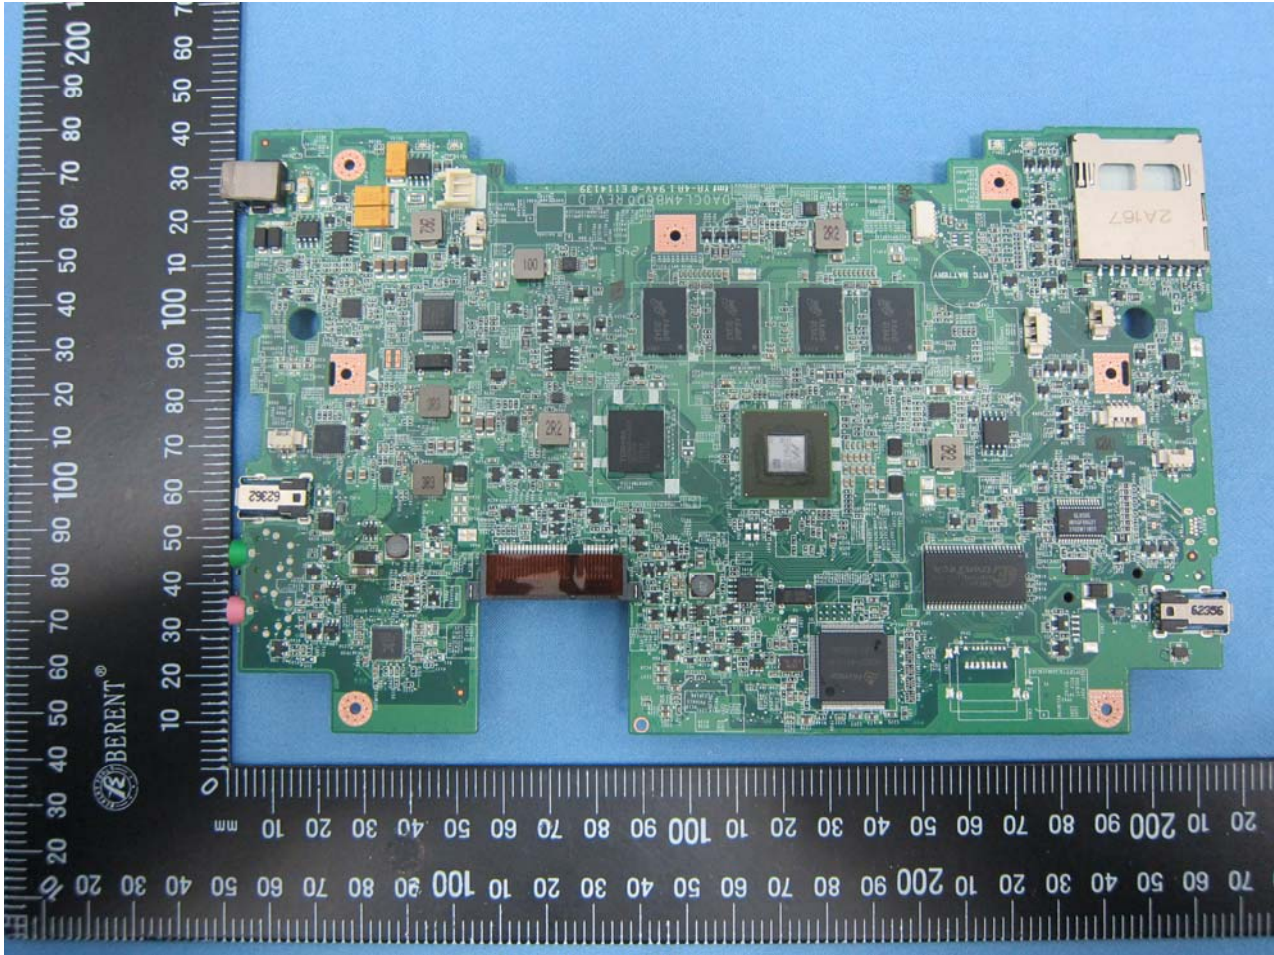

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

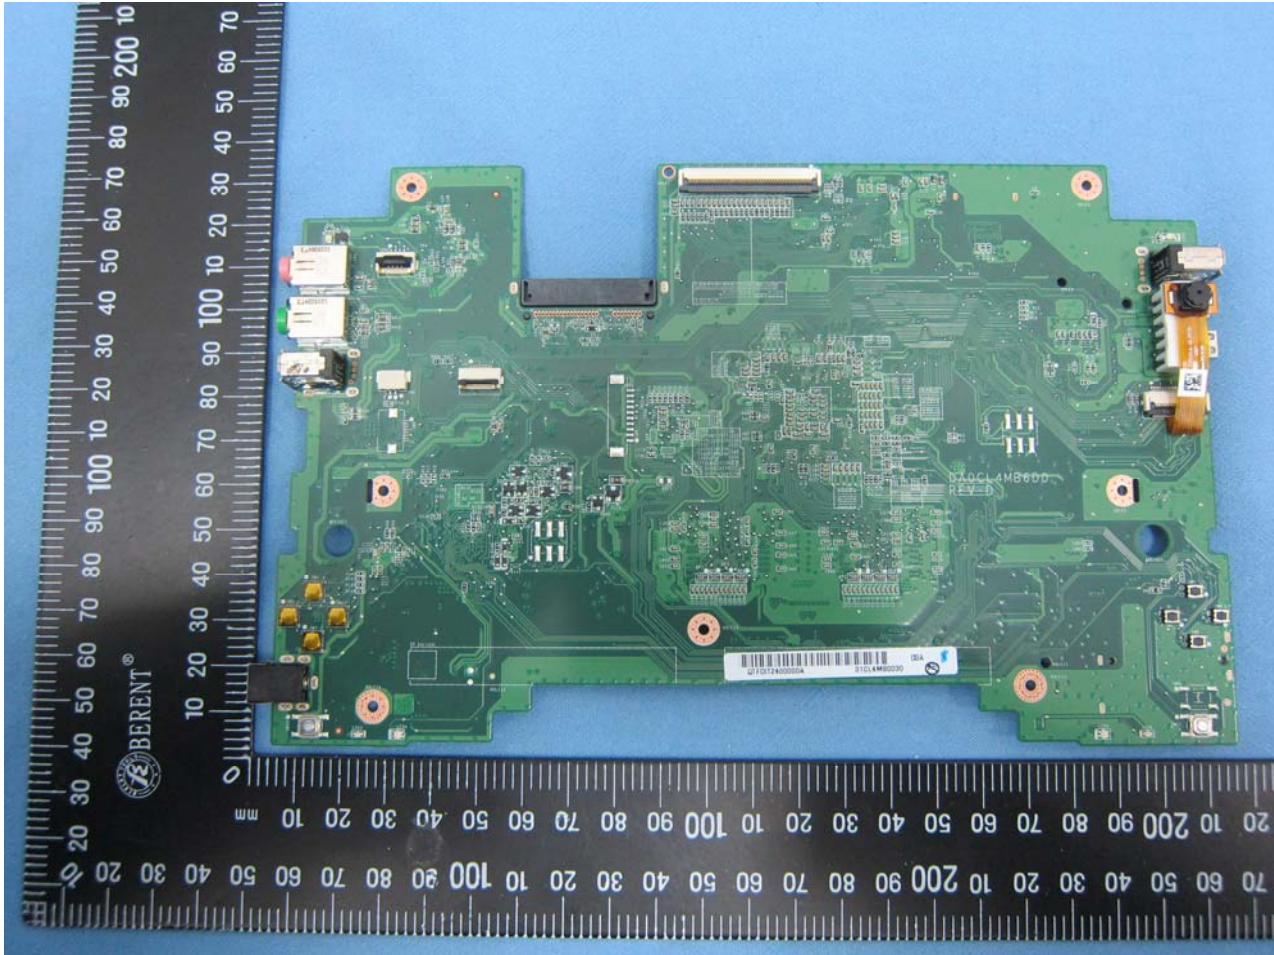


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

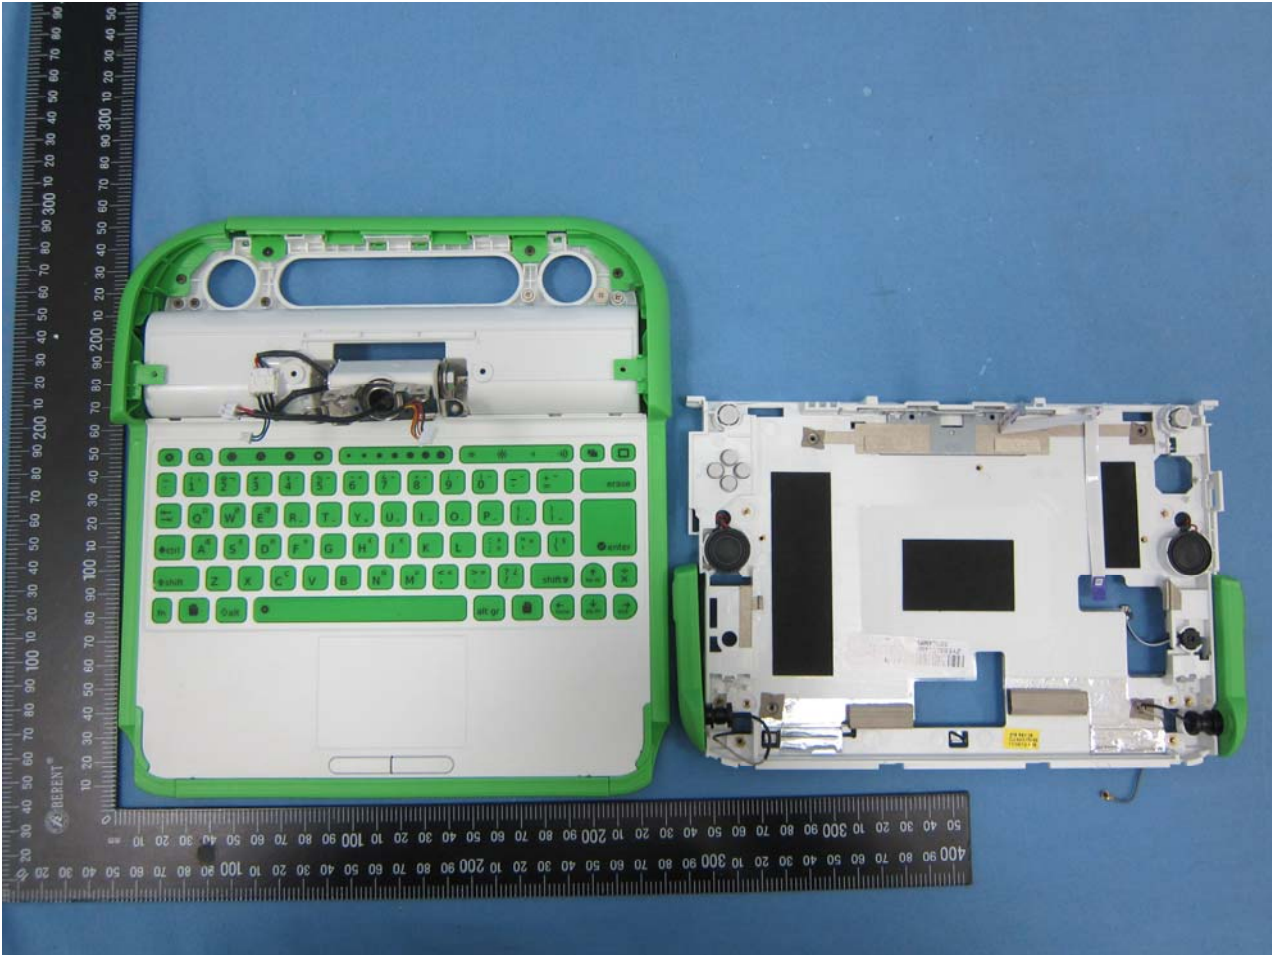

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

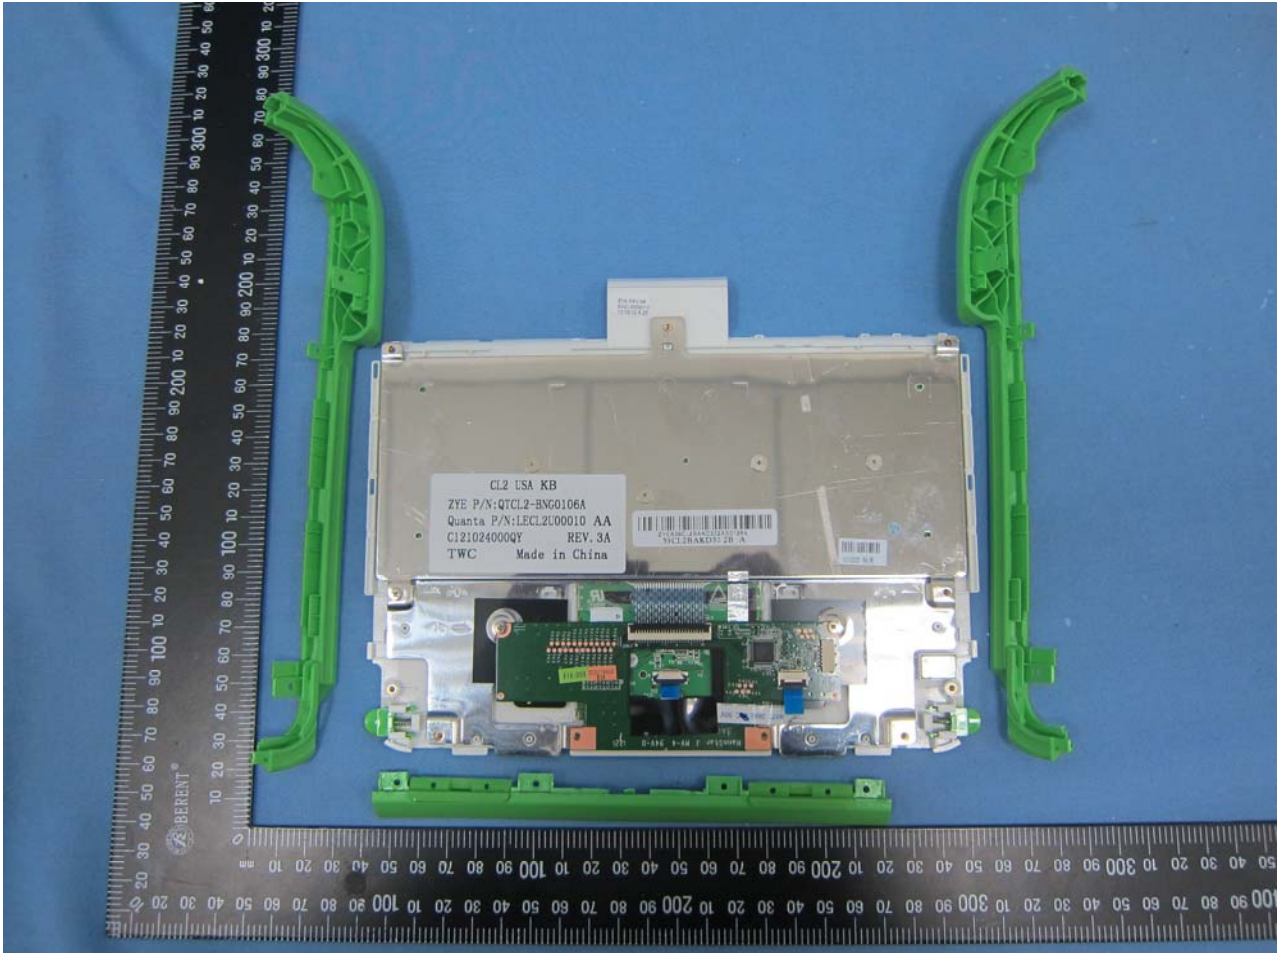


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

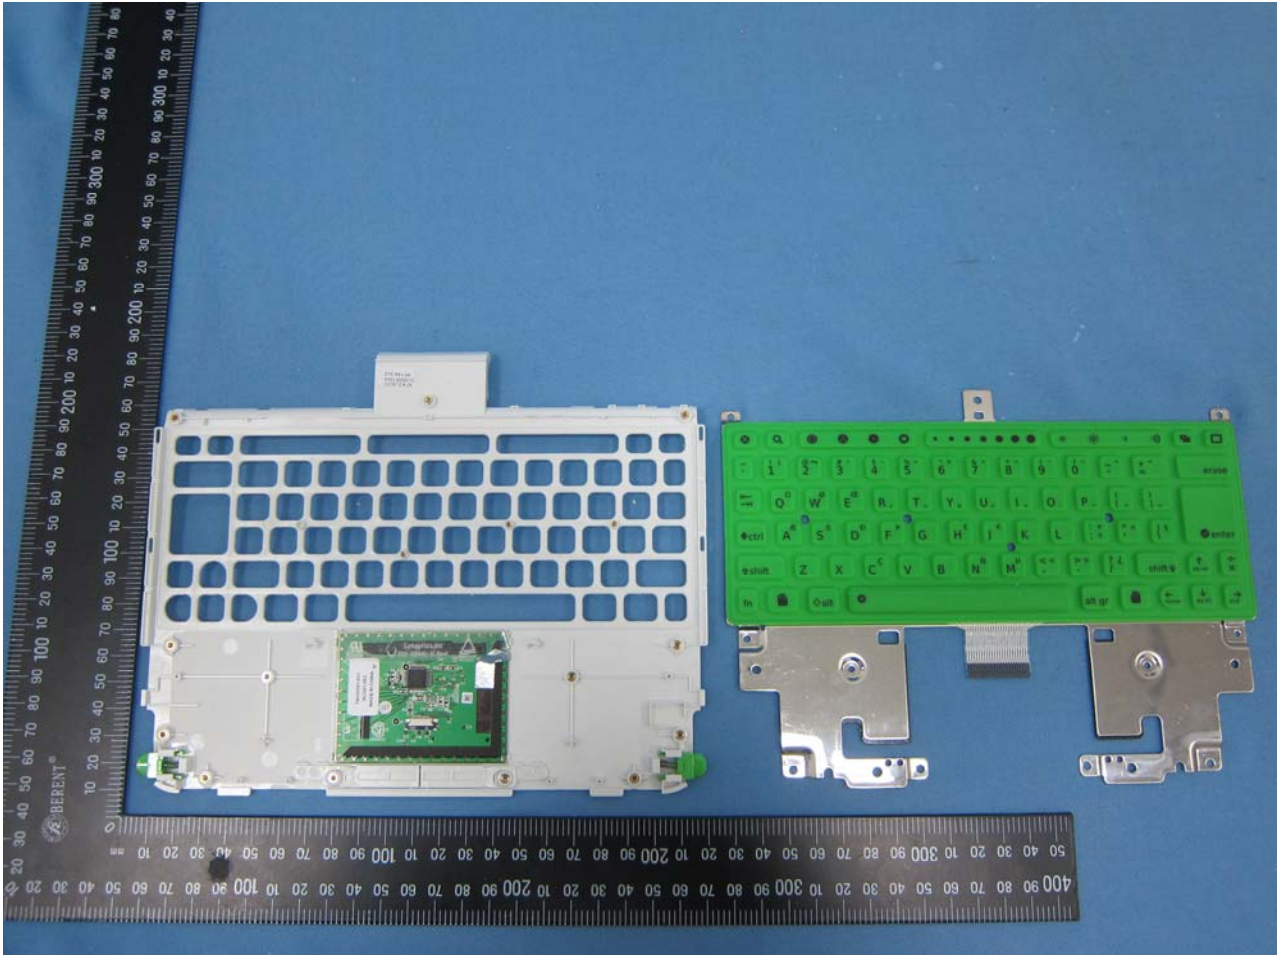


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

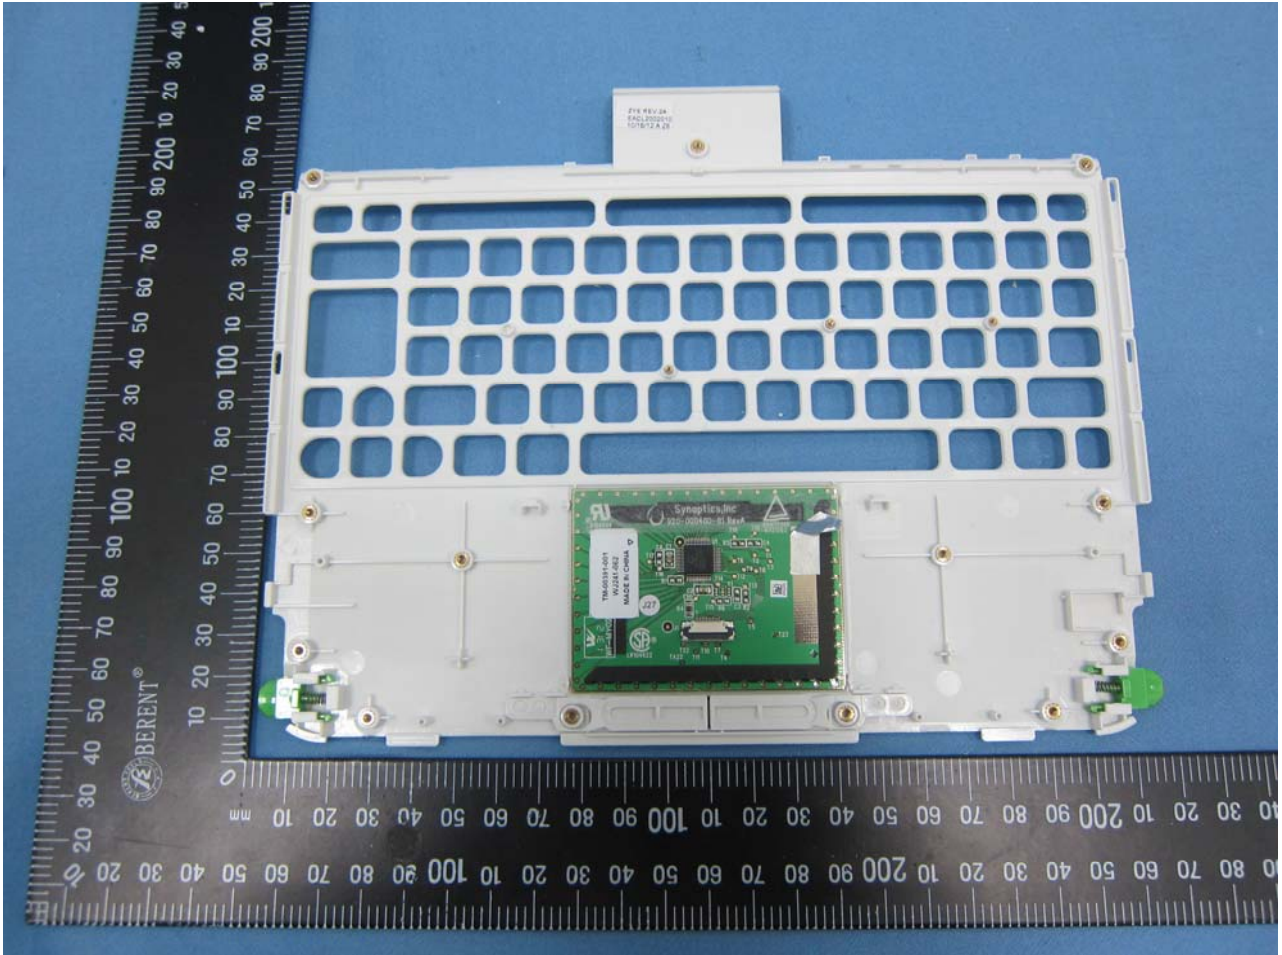

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

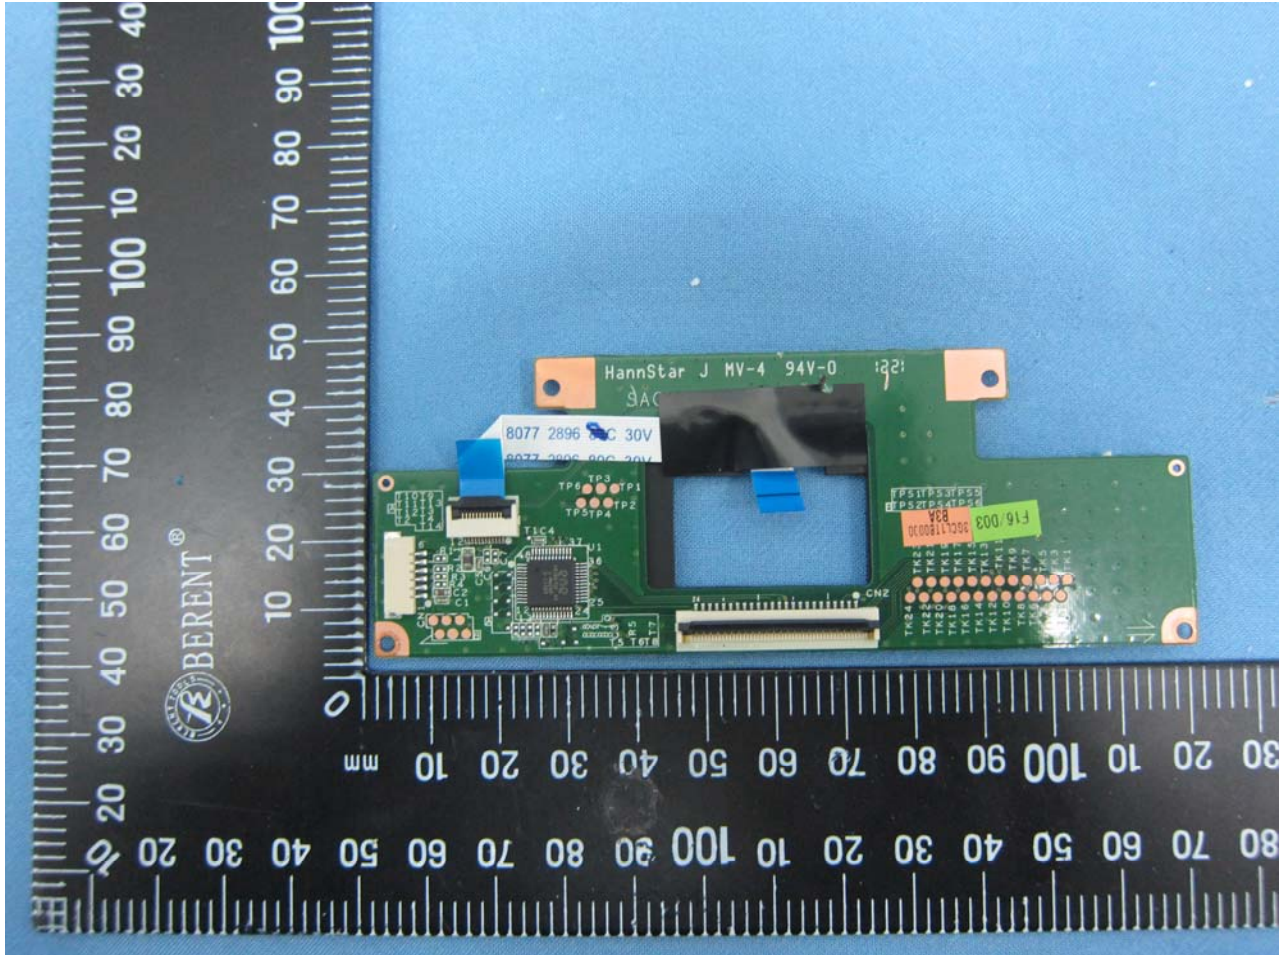


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

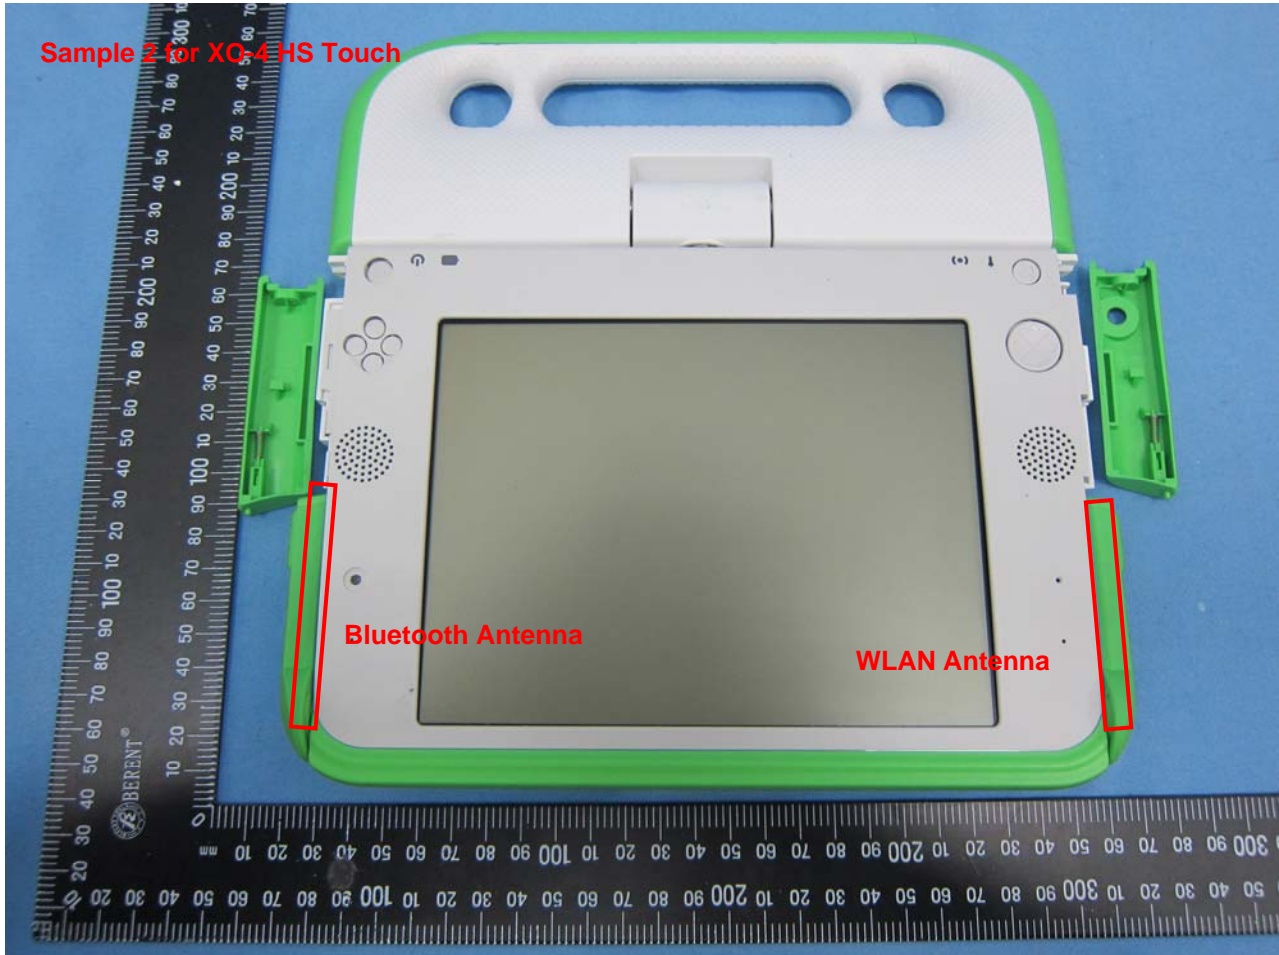

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

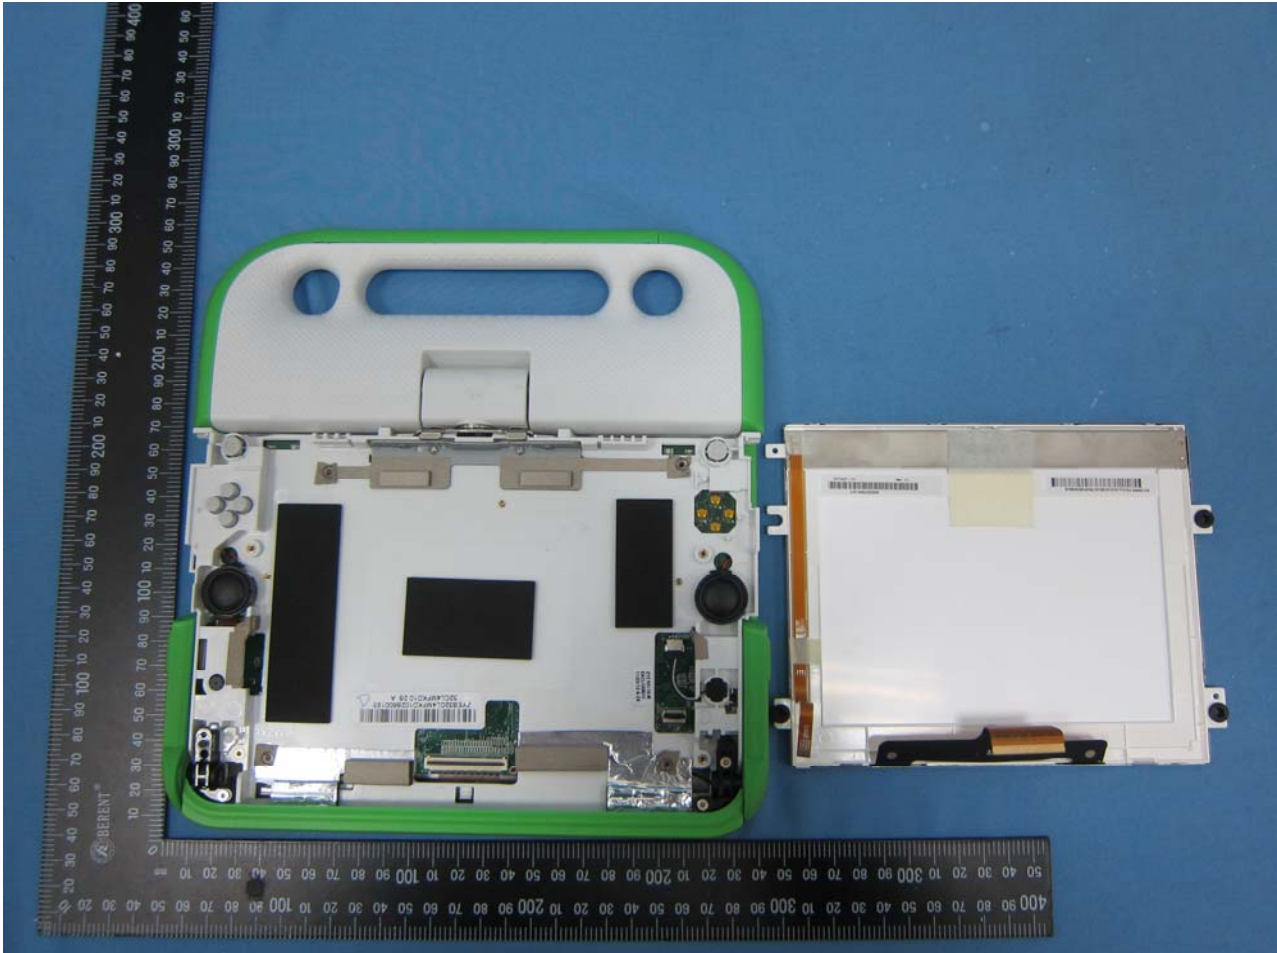


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

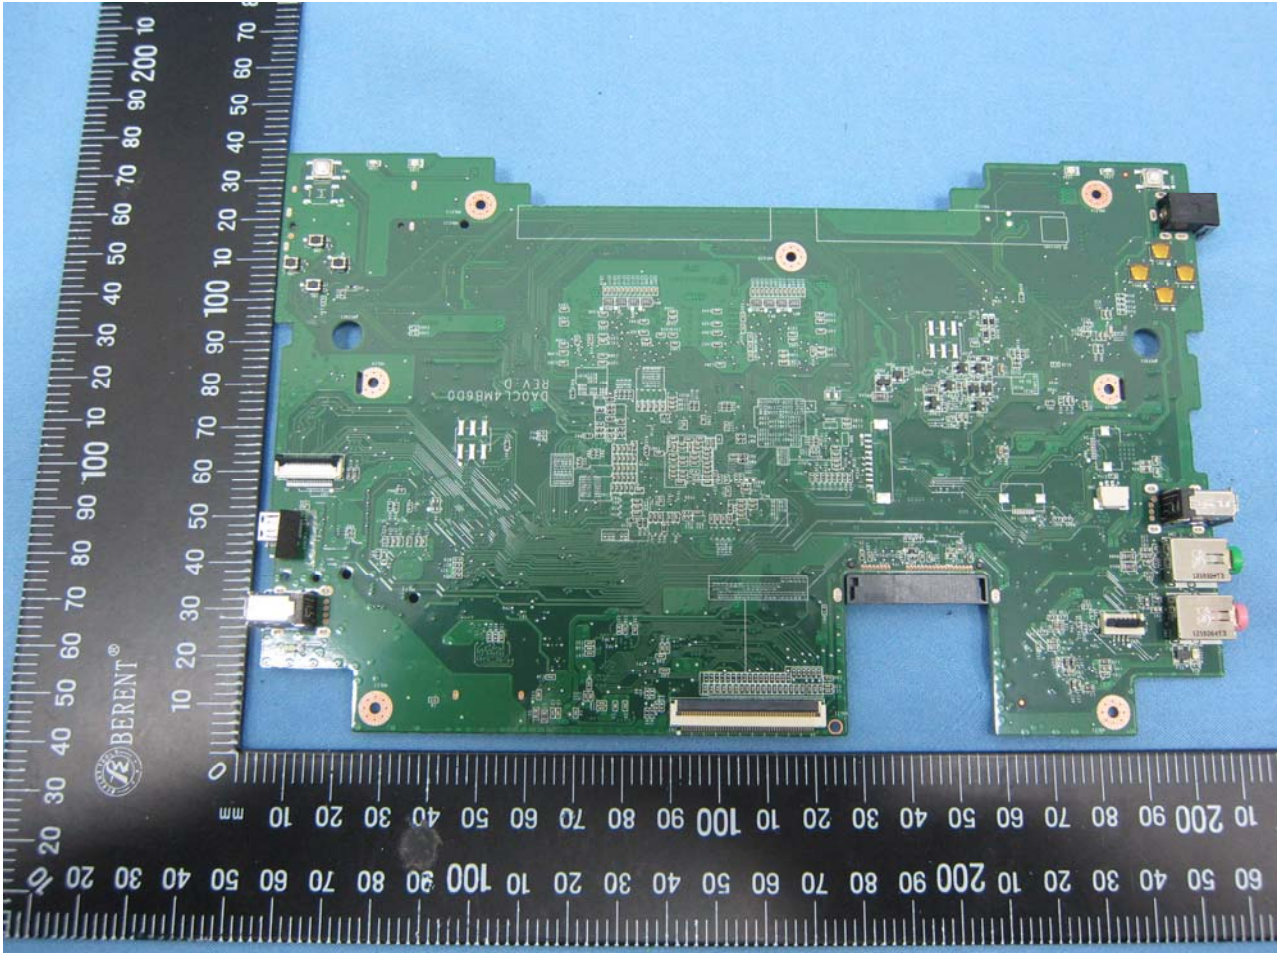


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

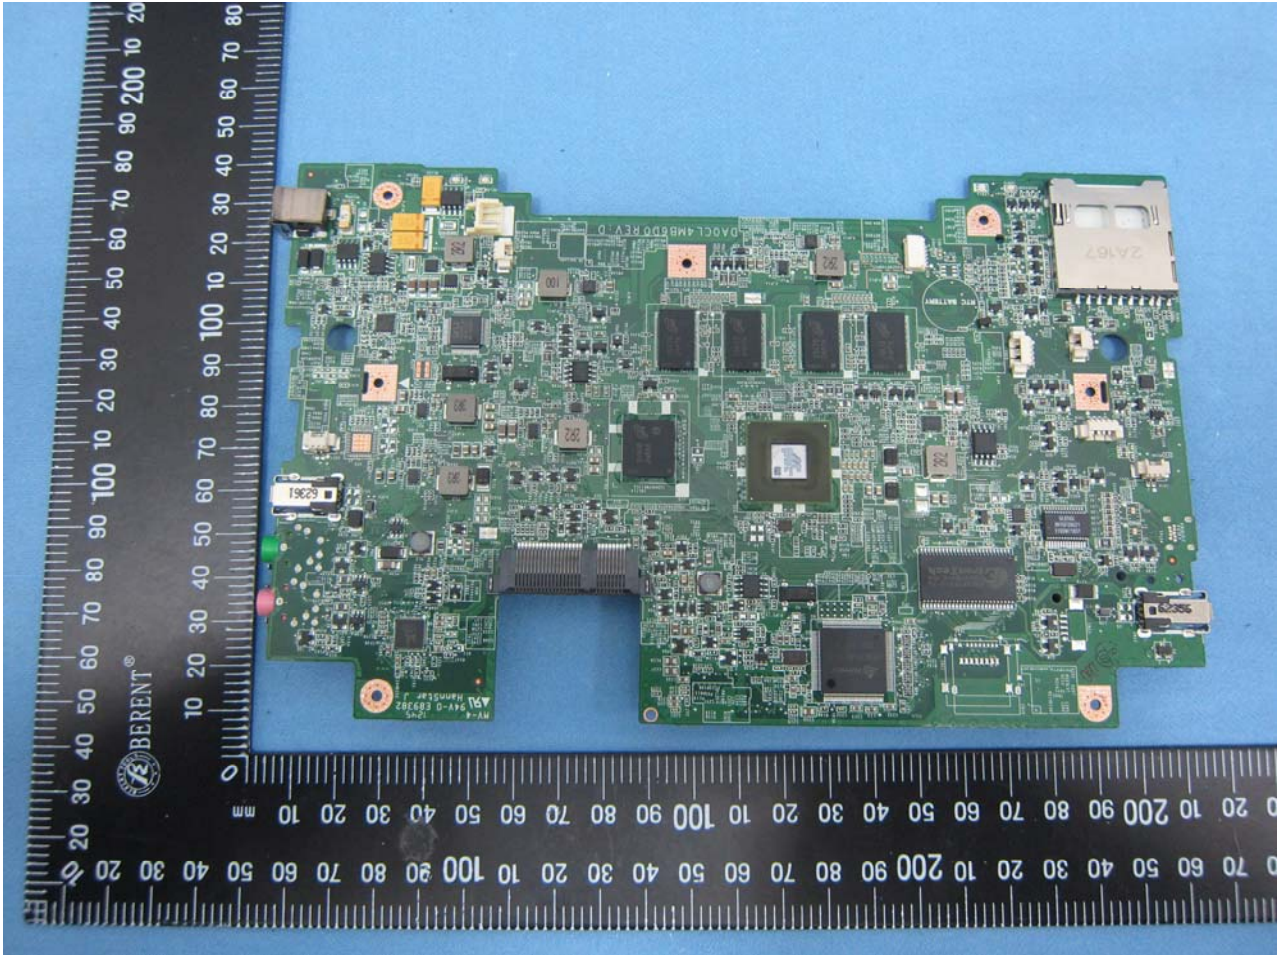

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

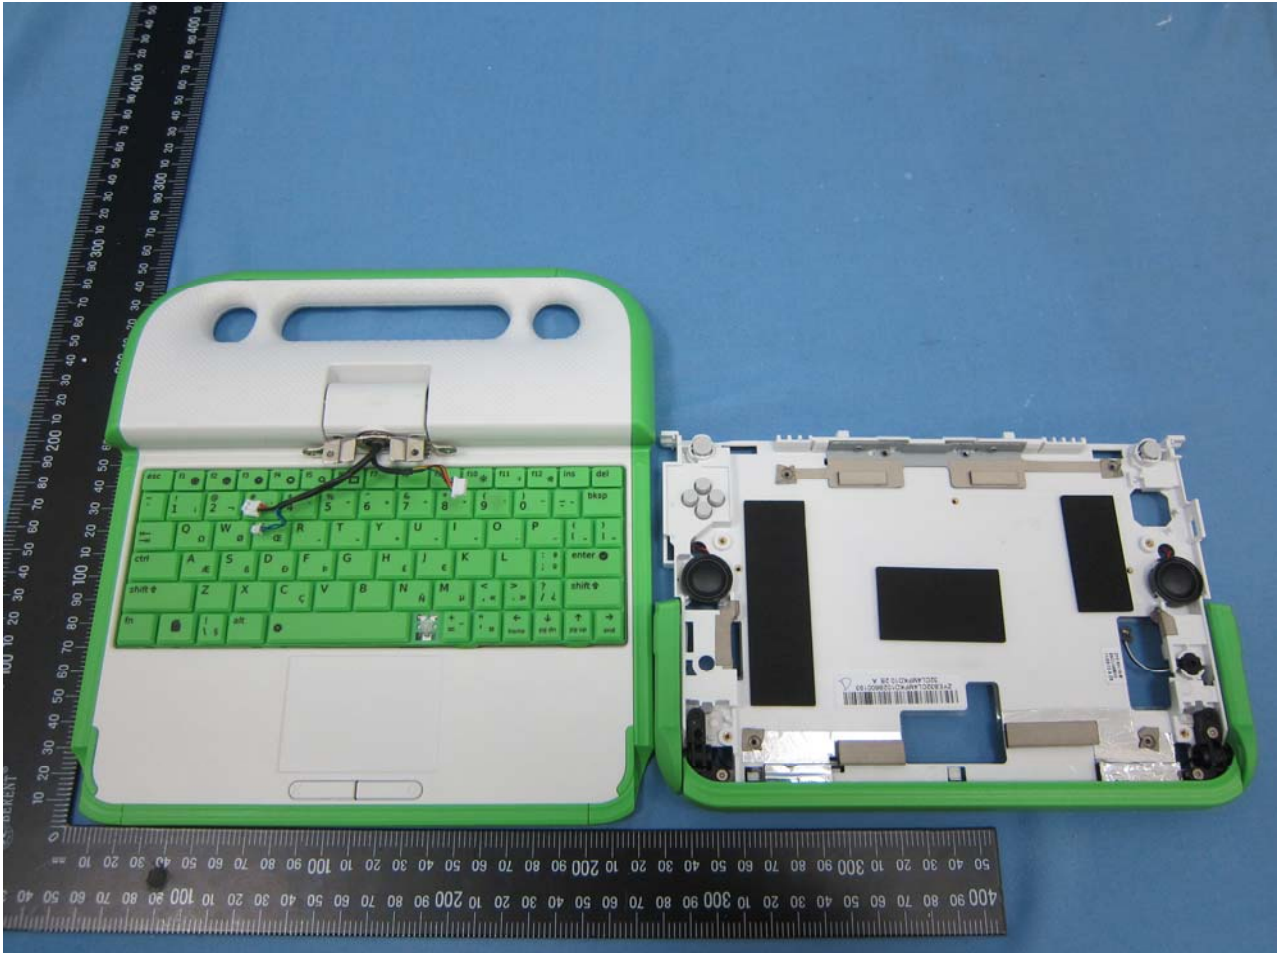


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

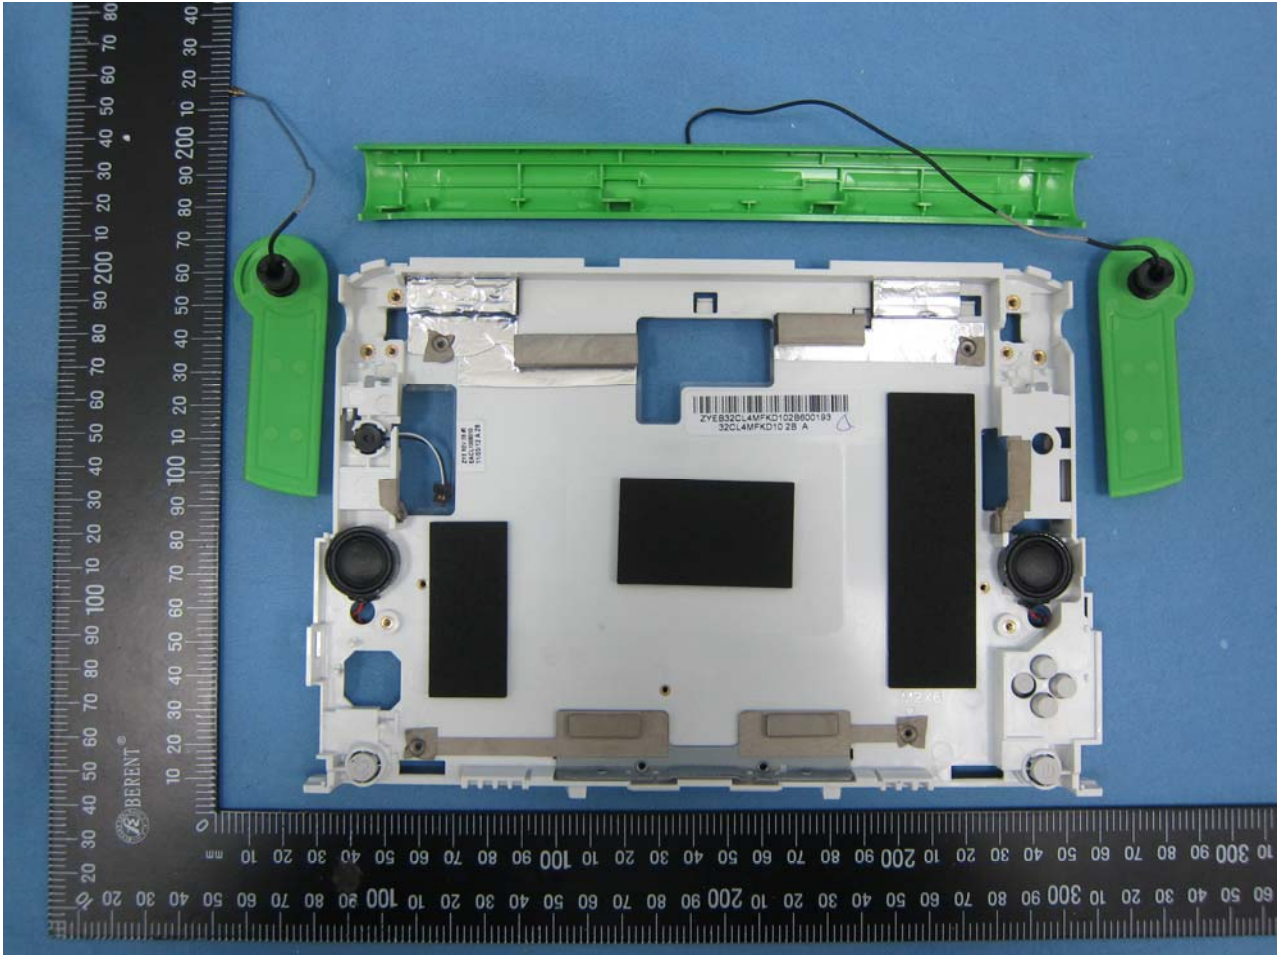


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

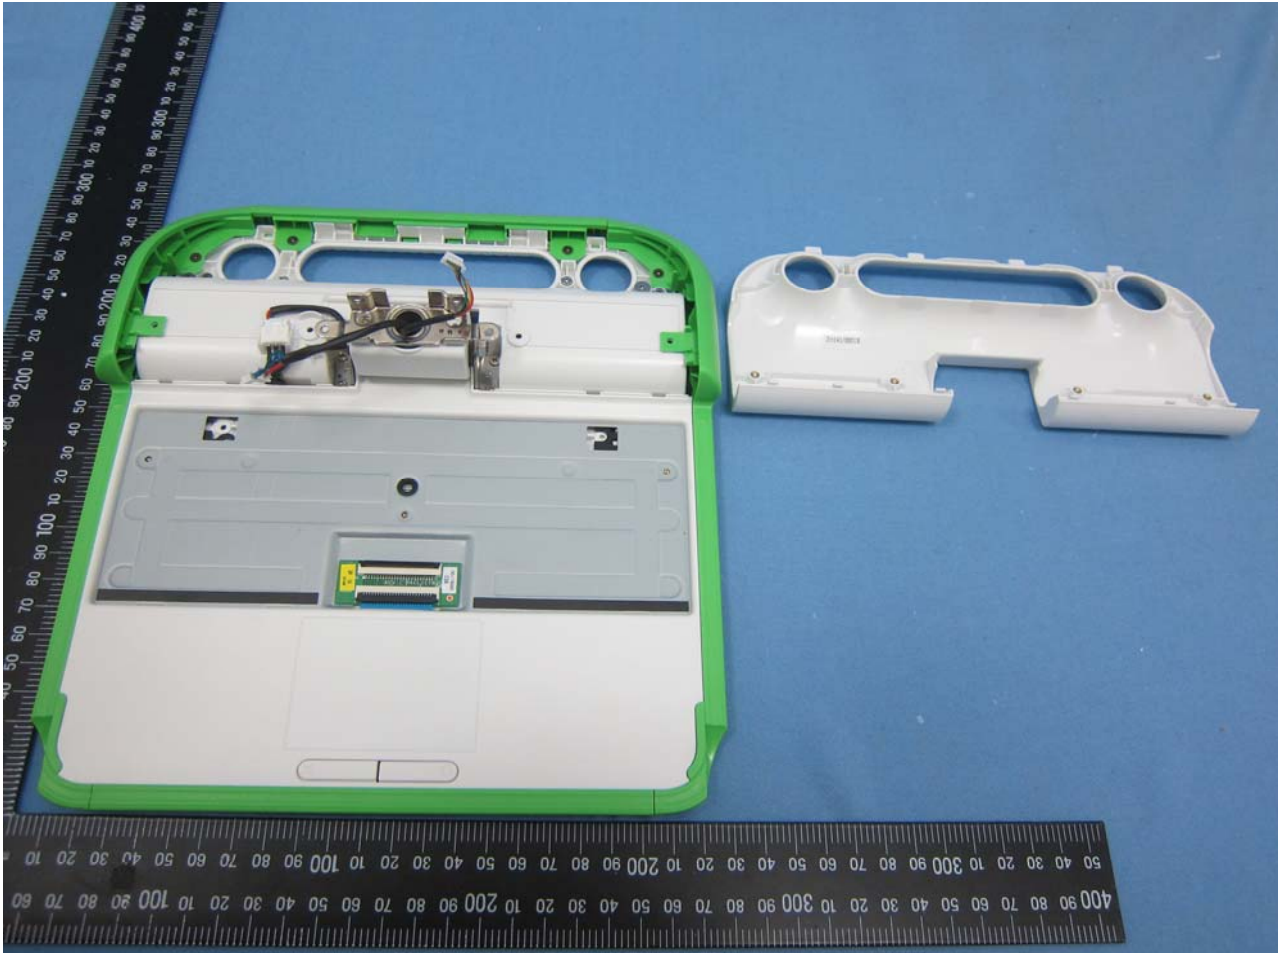

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

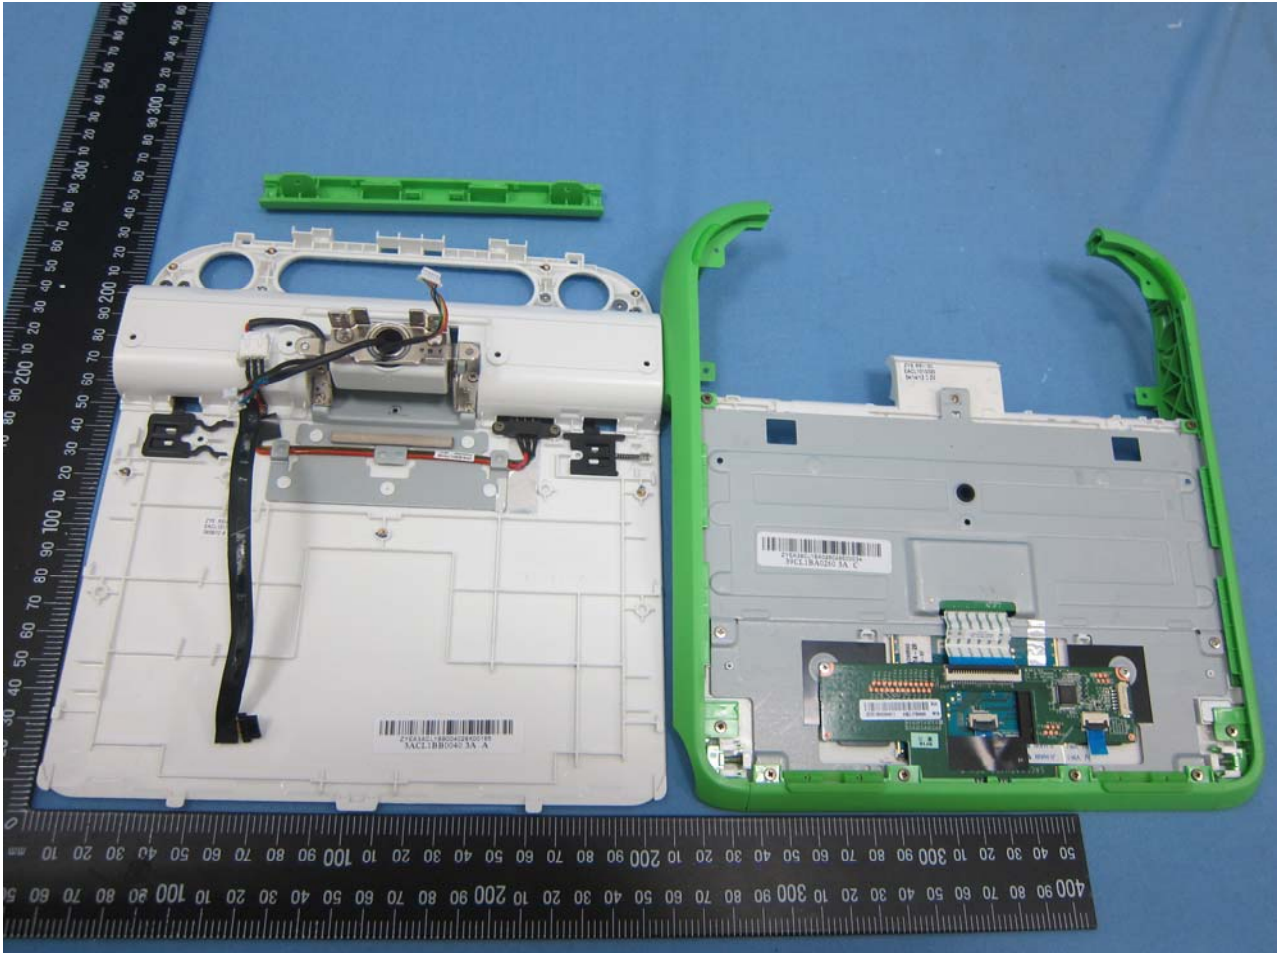


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

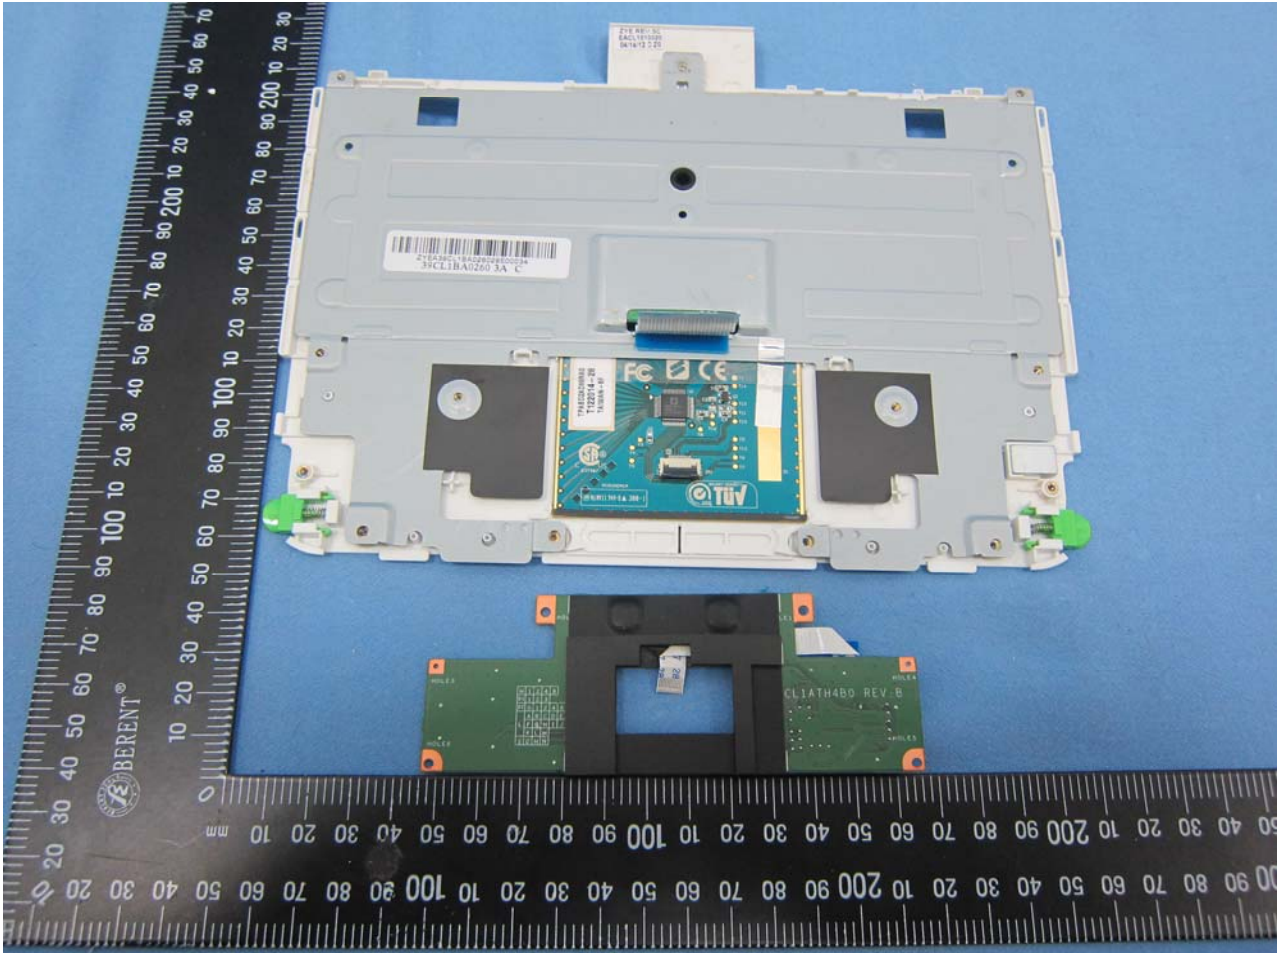


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

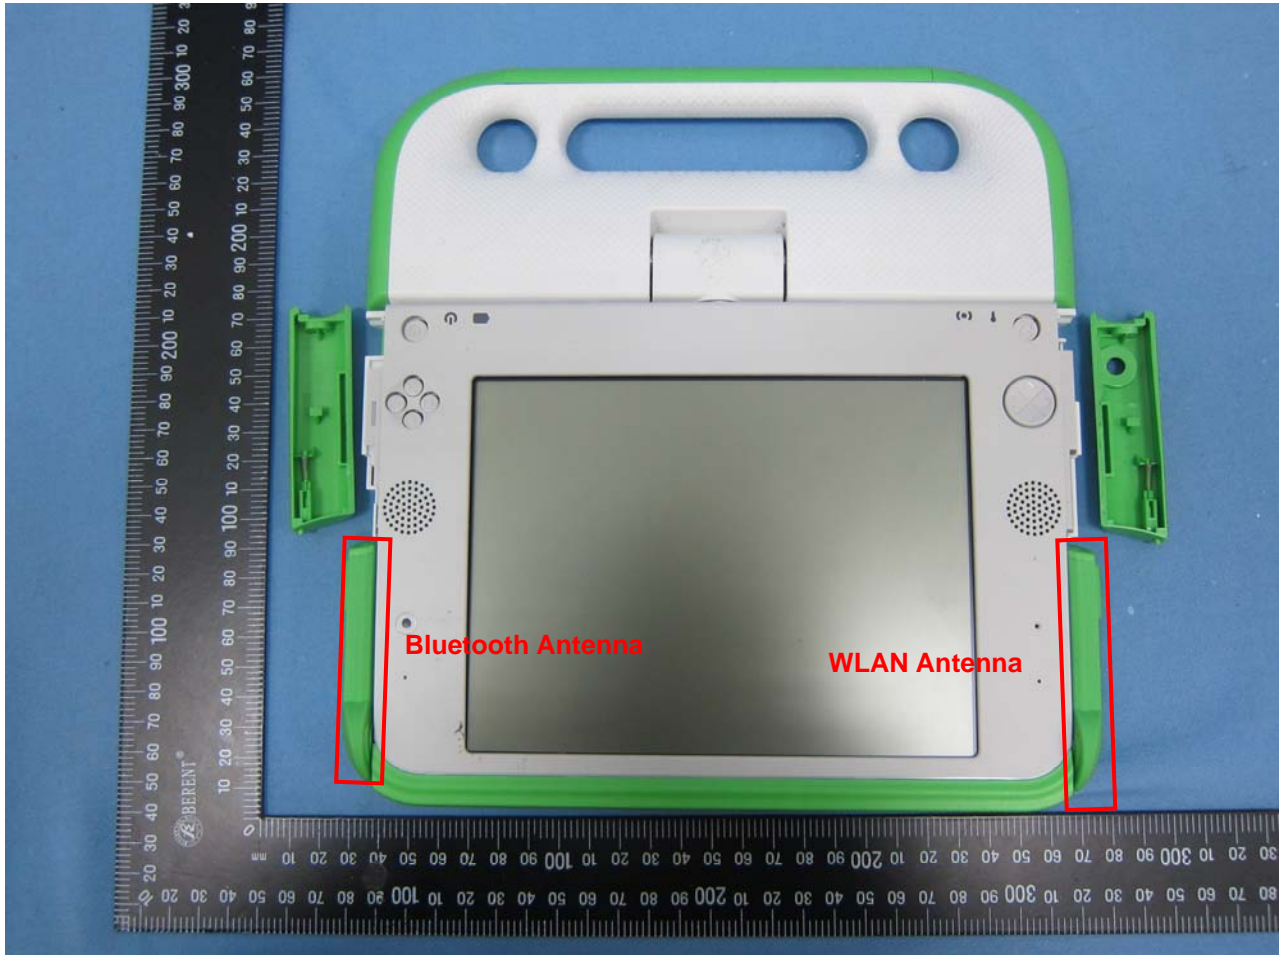

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

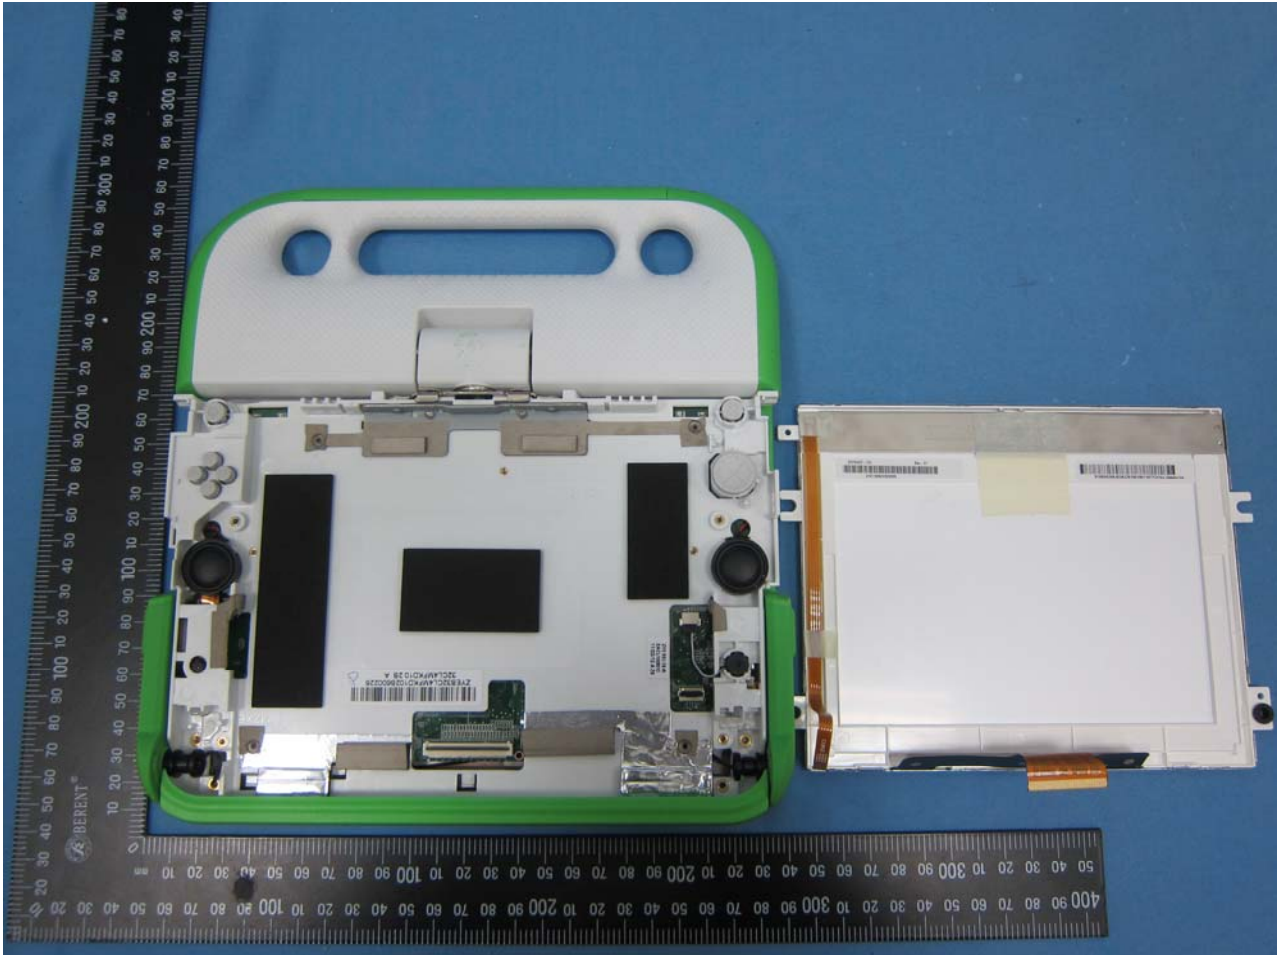


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

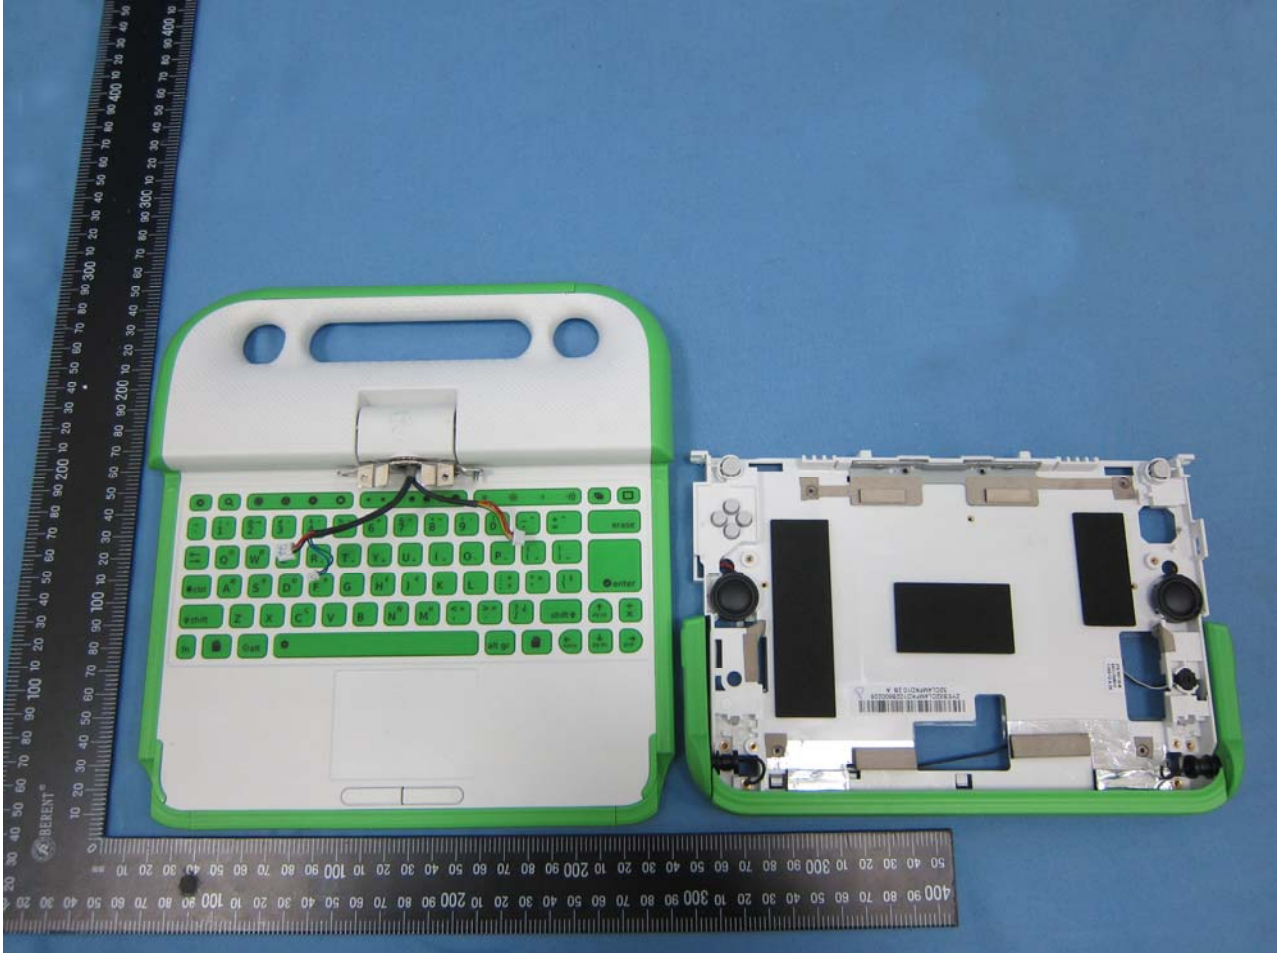


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

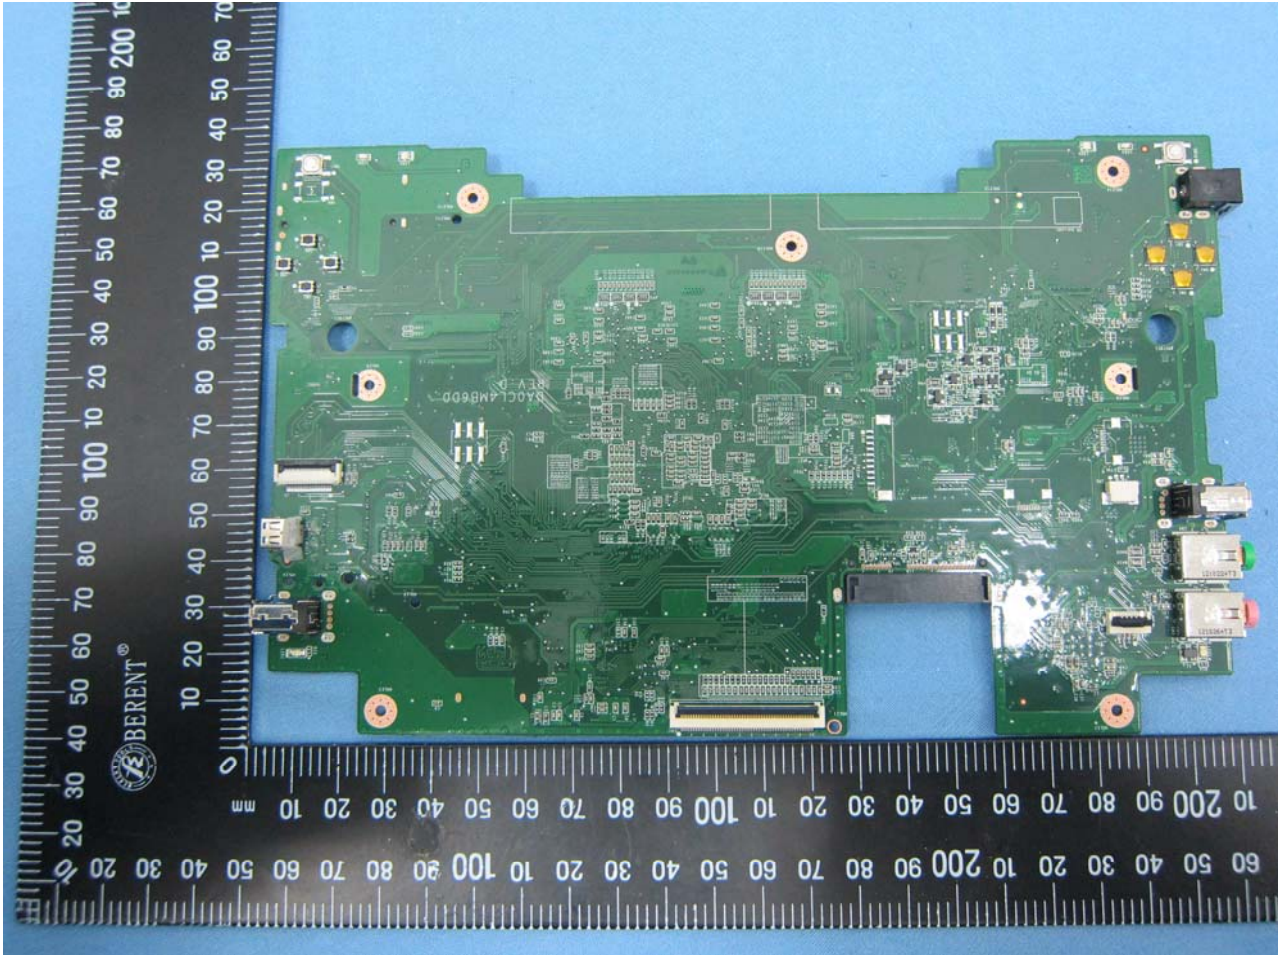


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

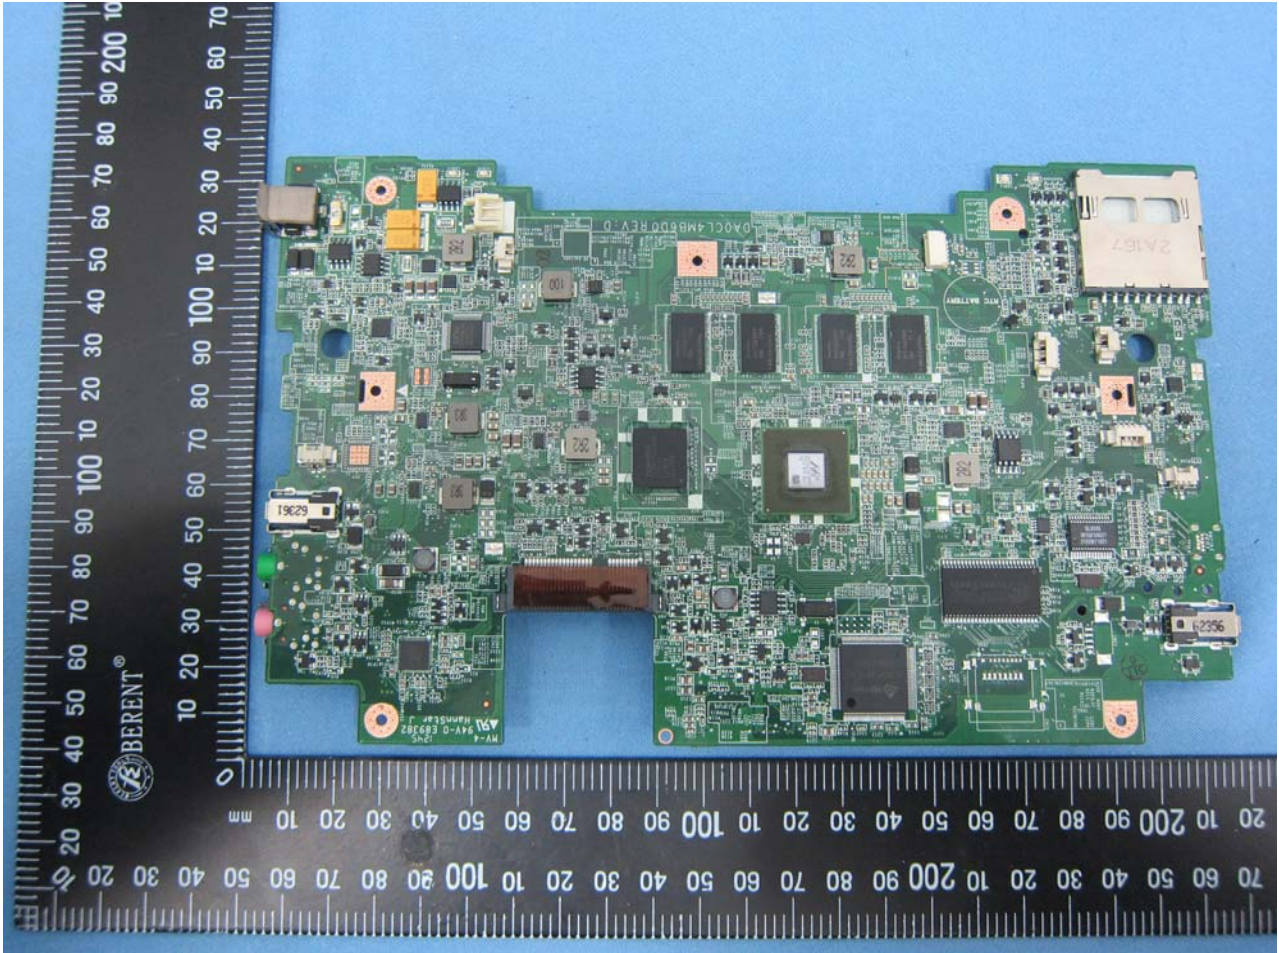


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

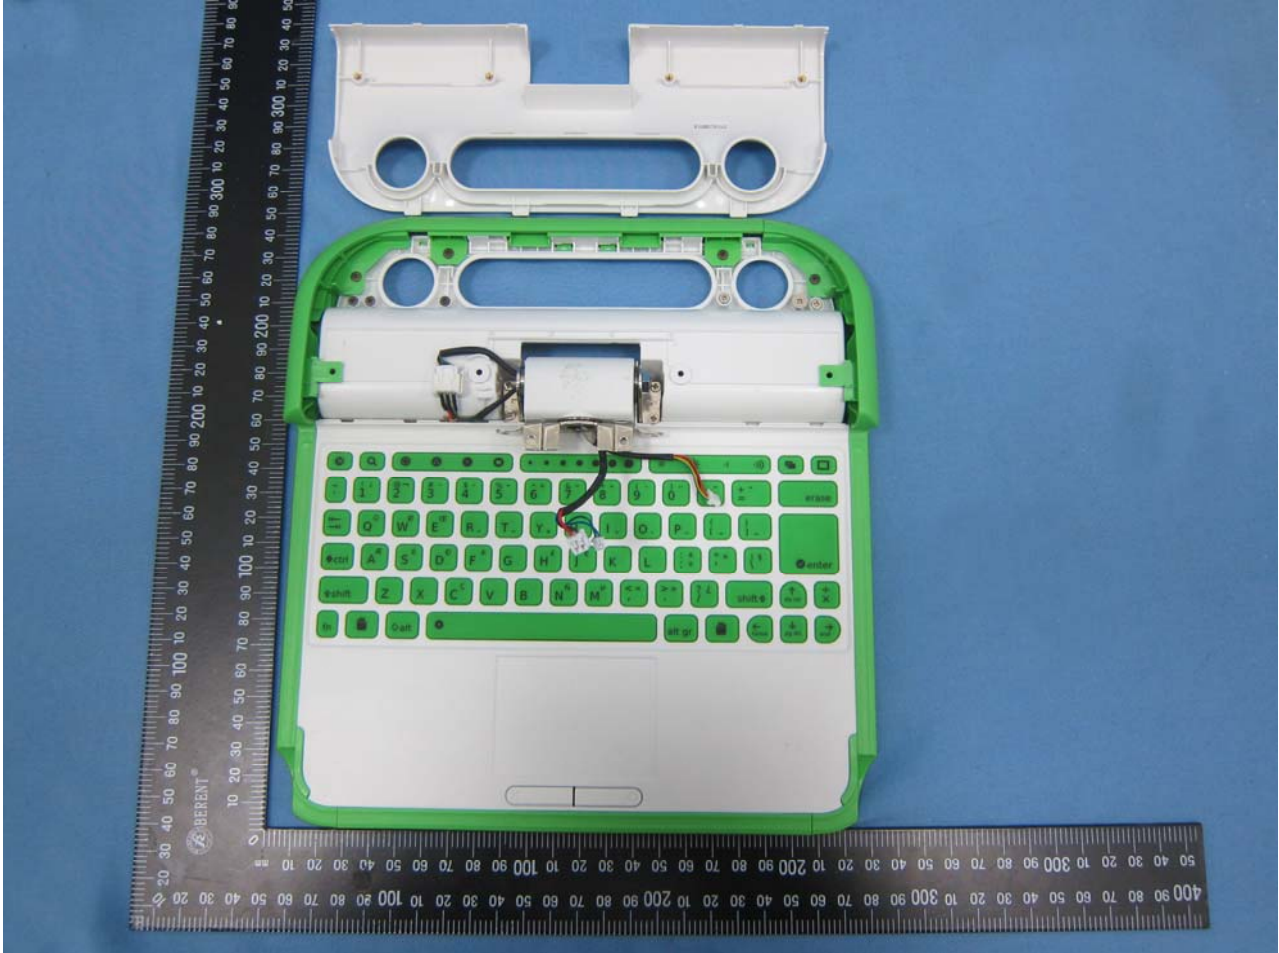

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

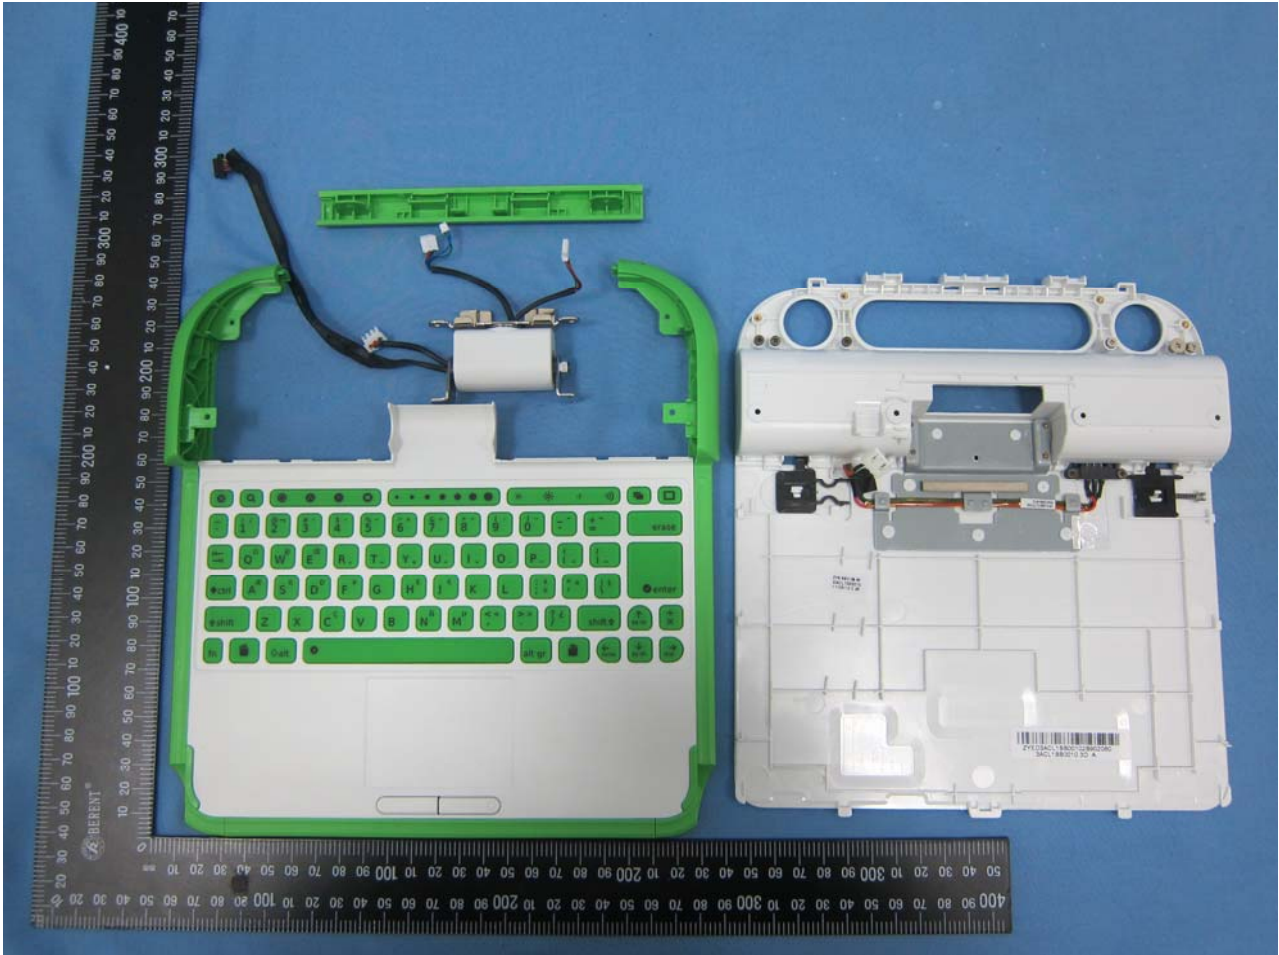


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

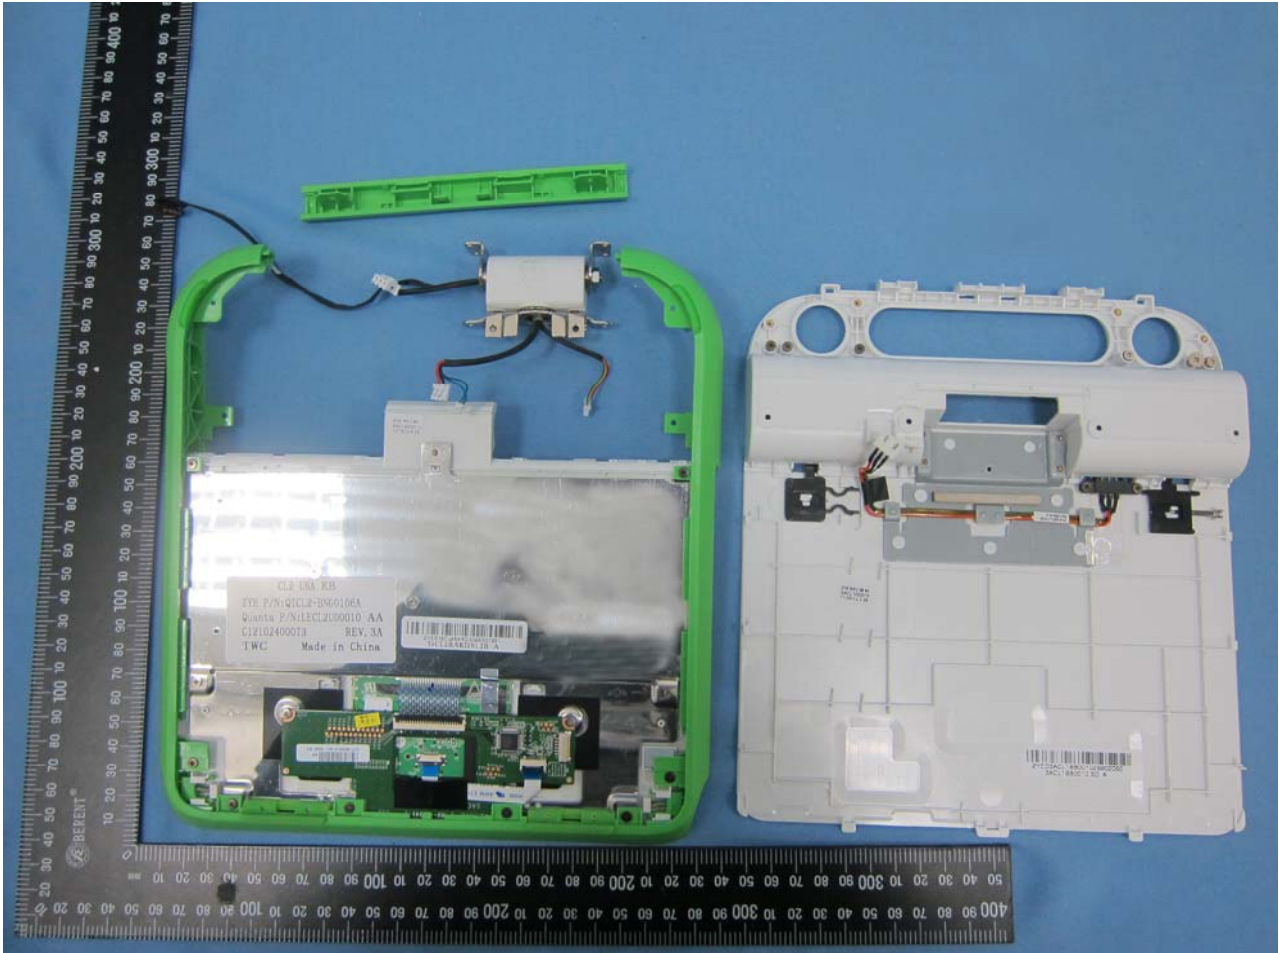

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

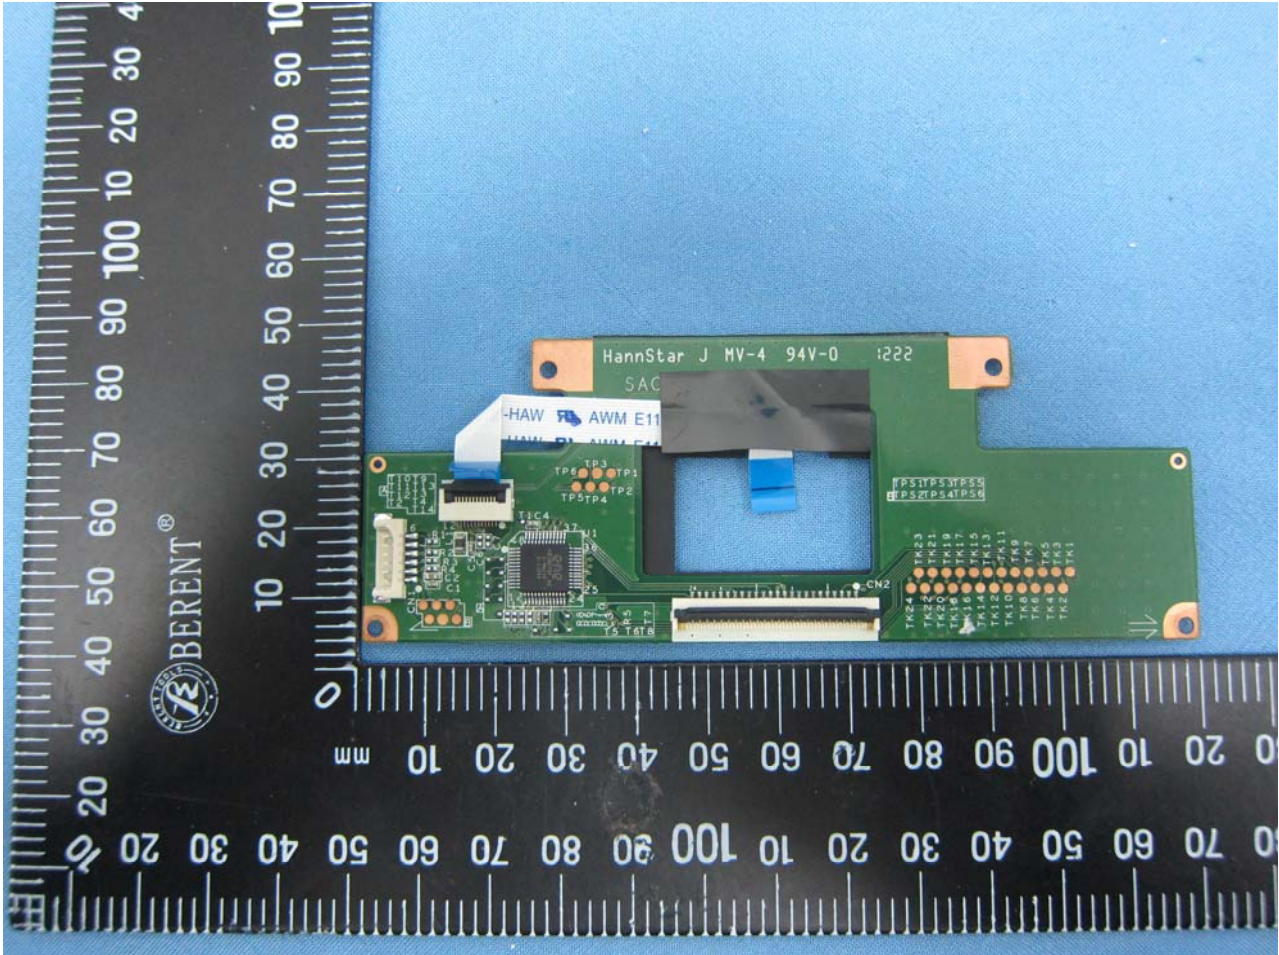

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

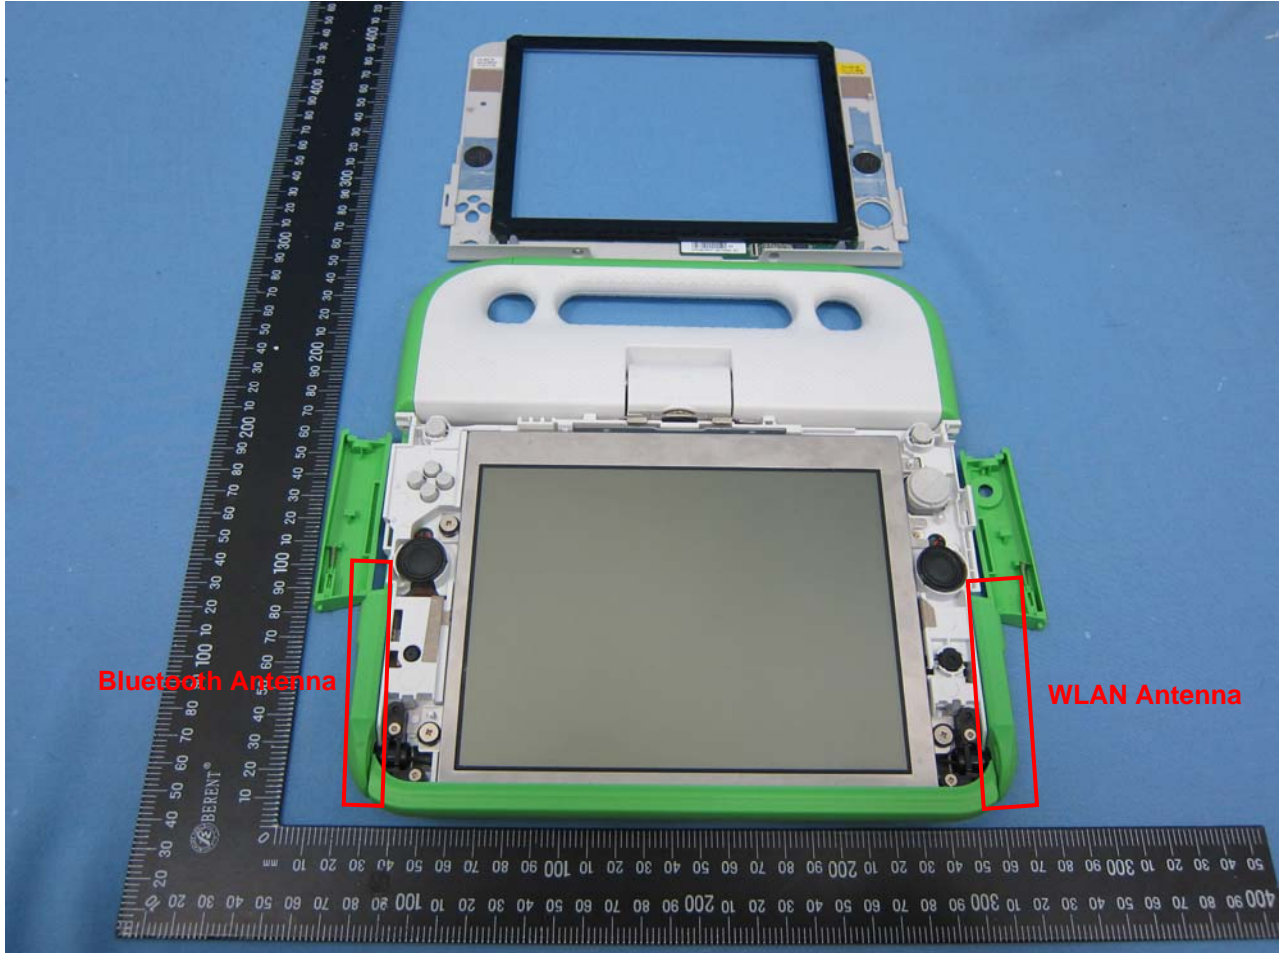

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS



Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

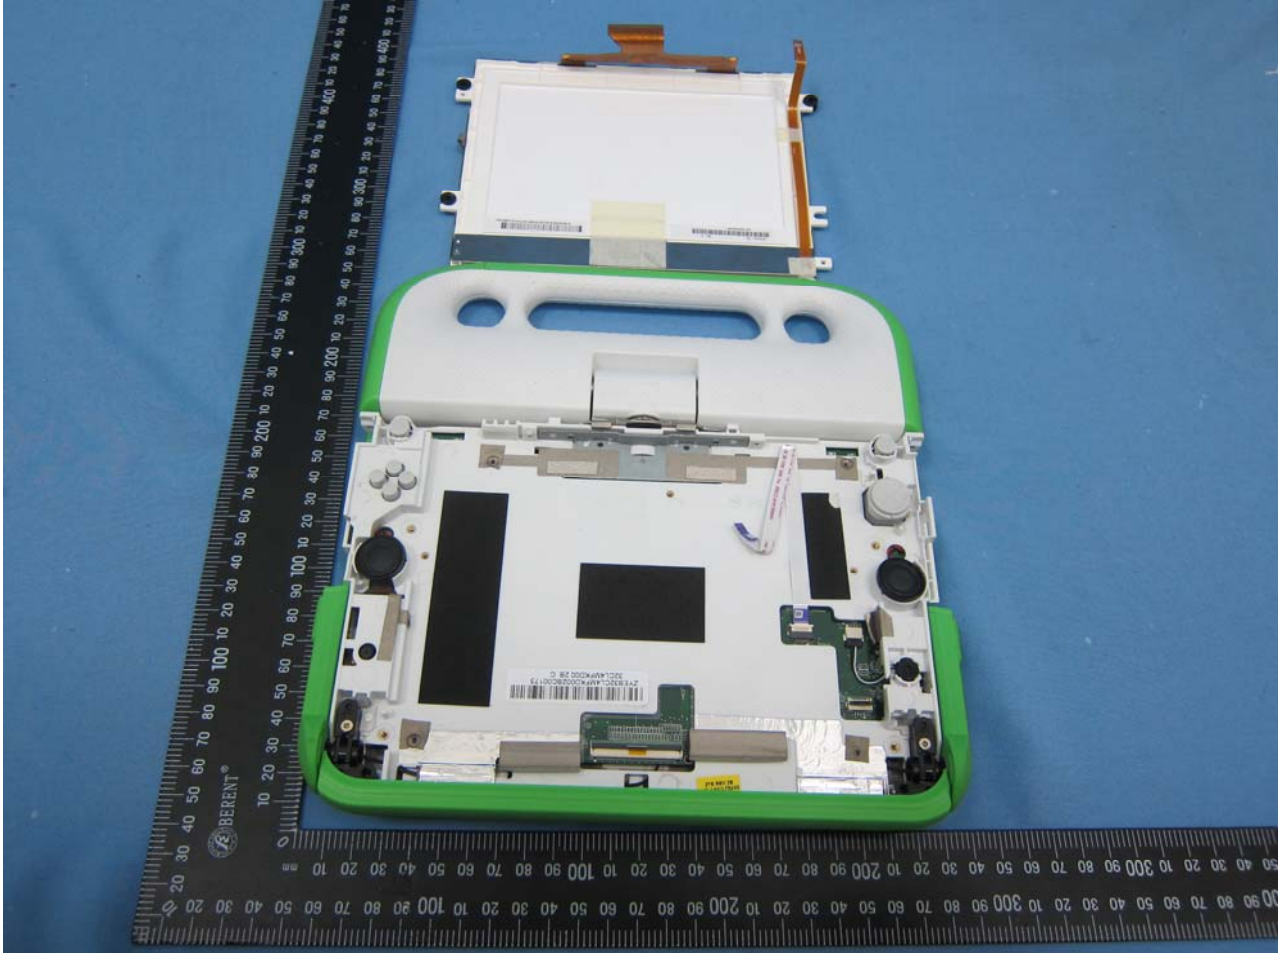

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

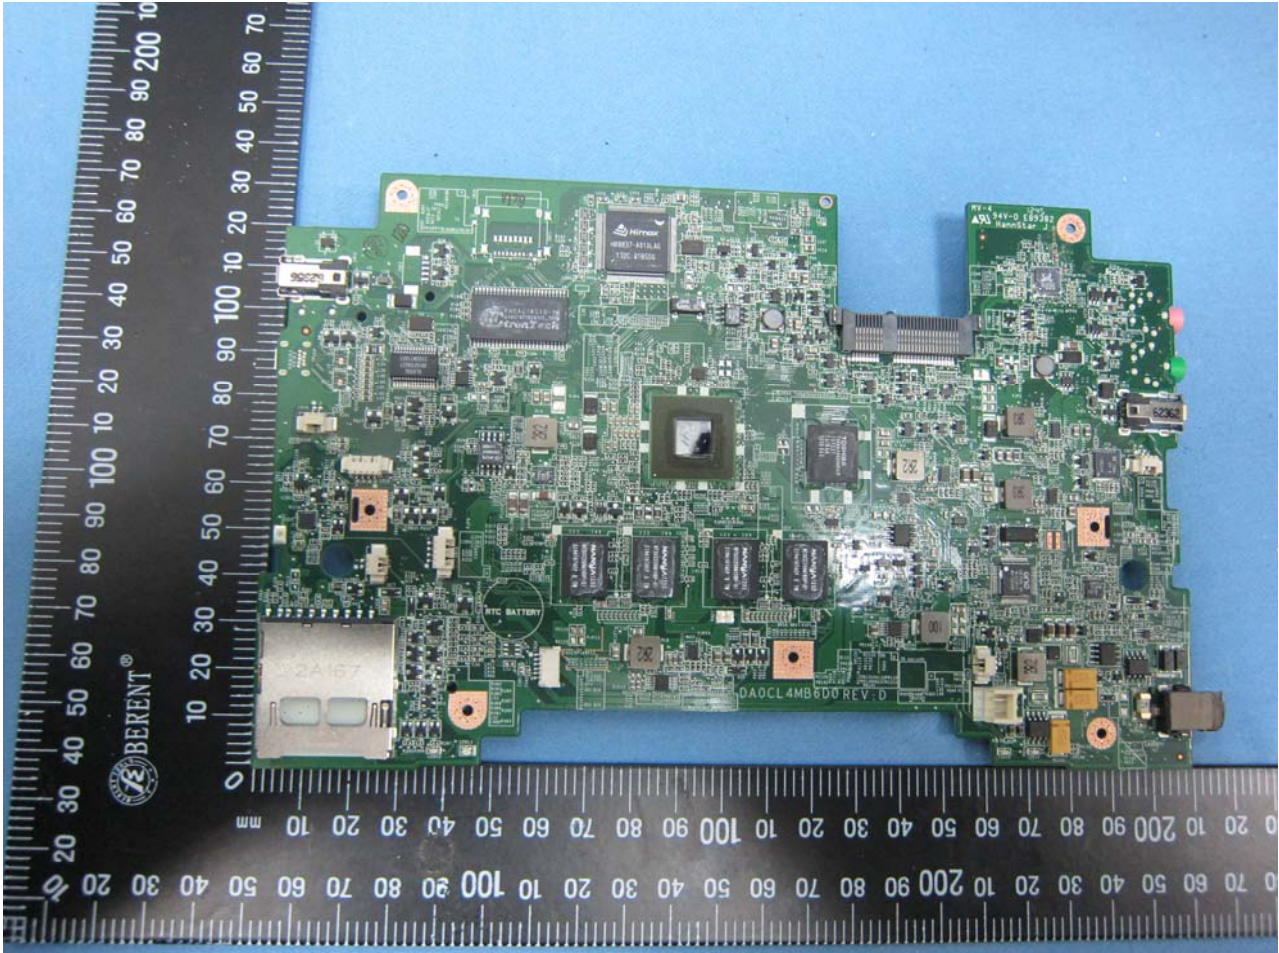

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

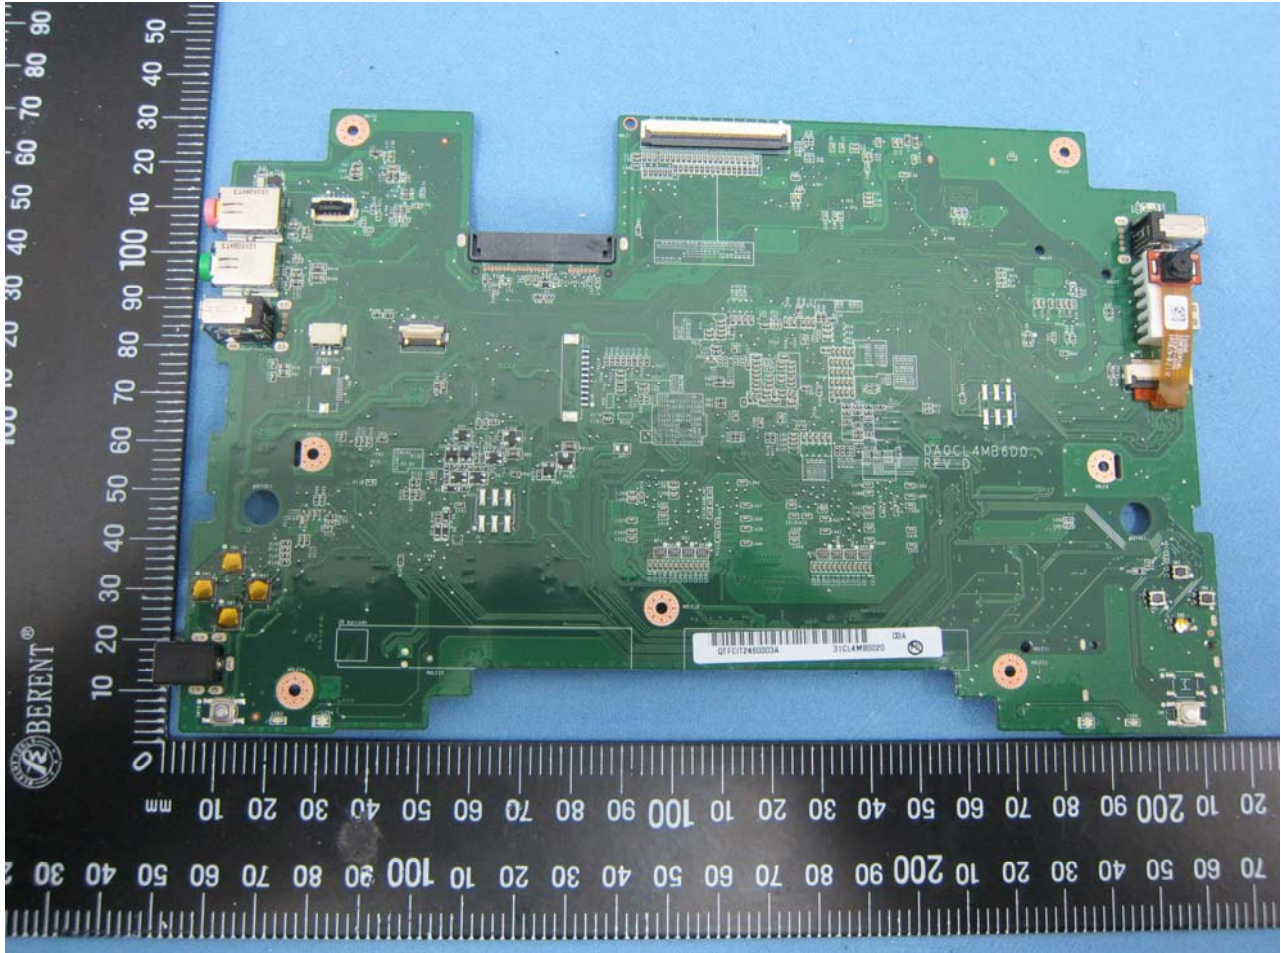

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

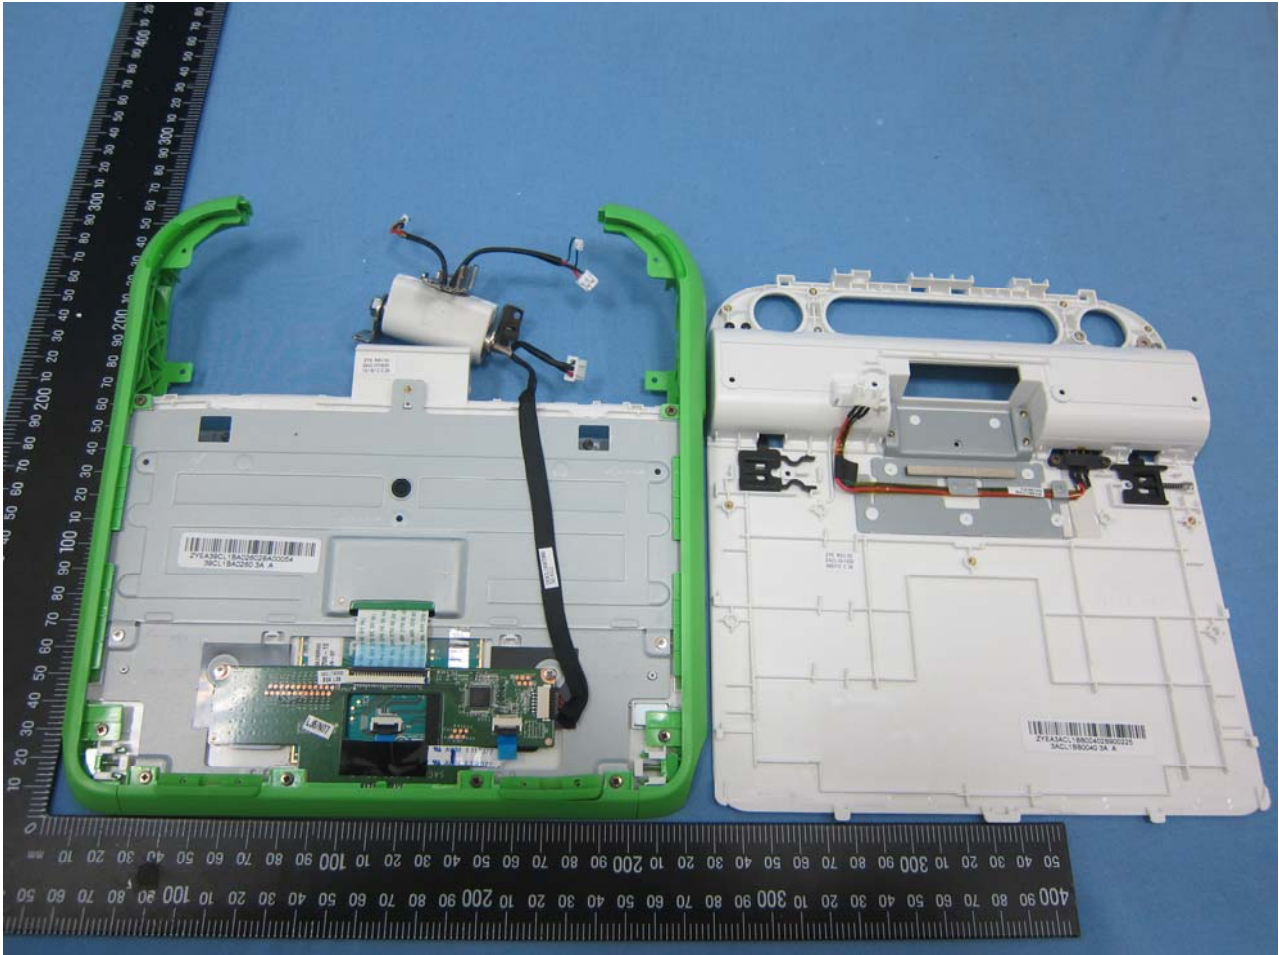


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

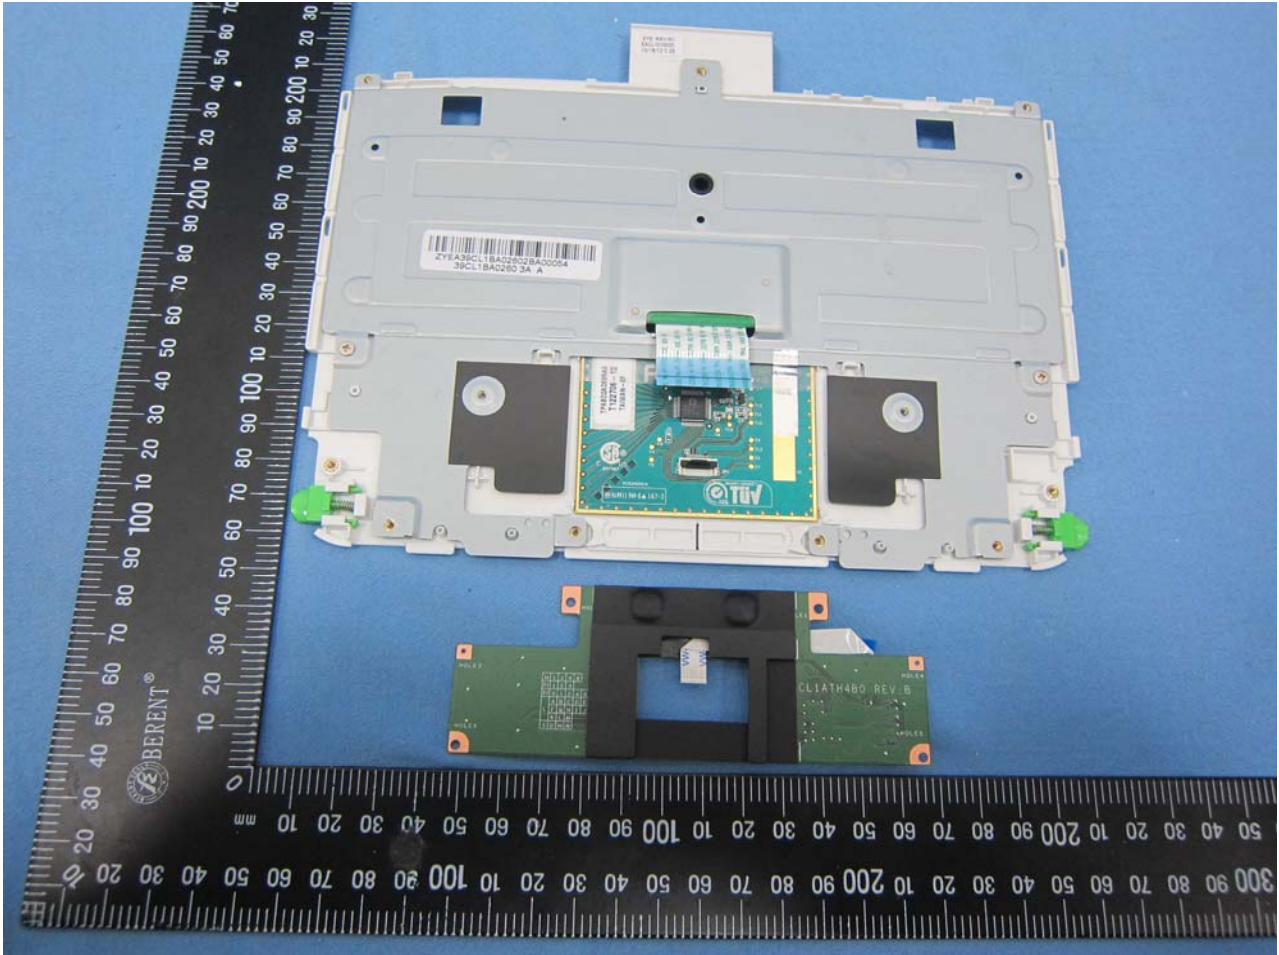


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

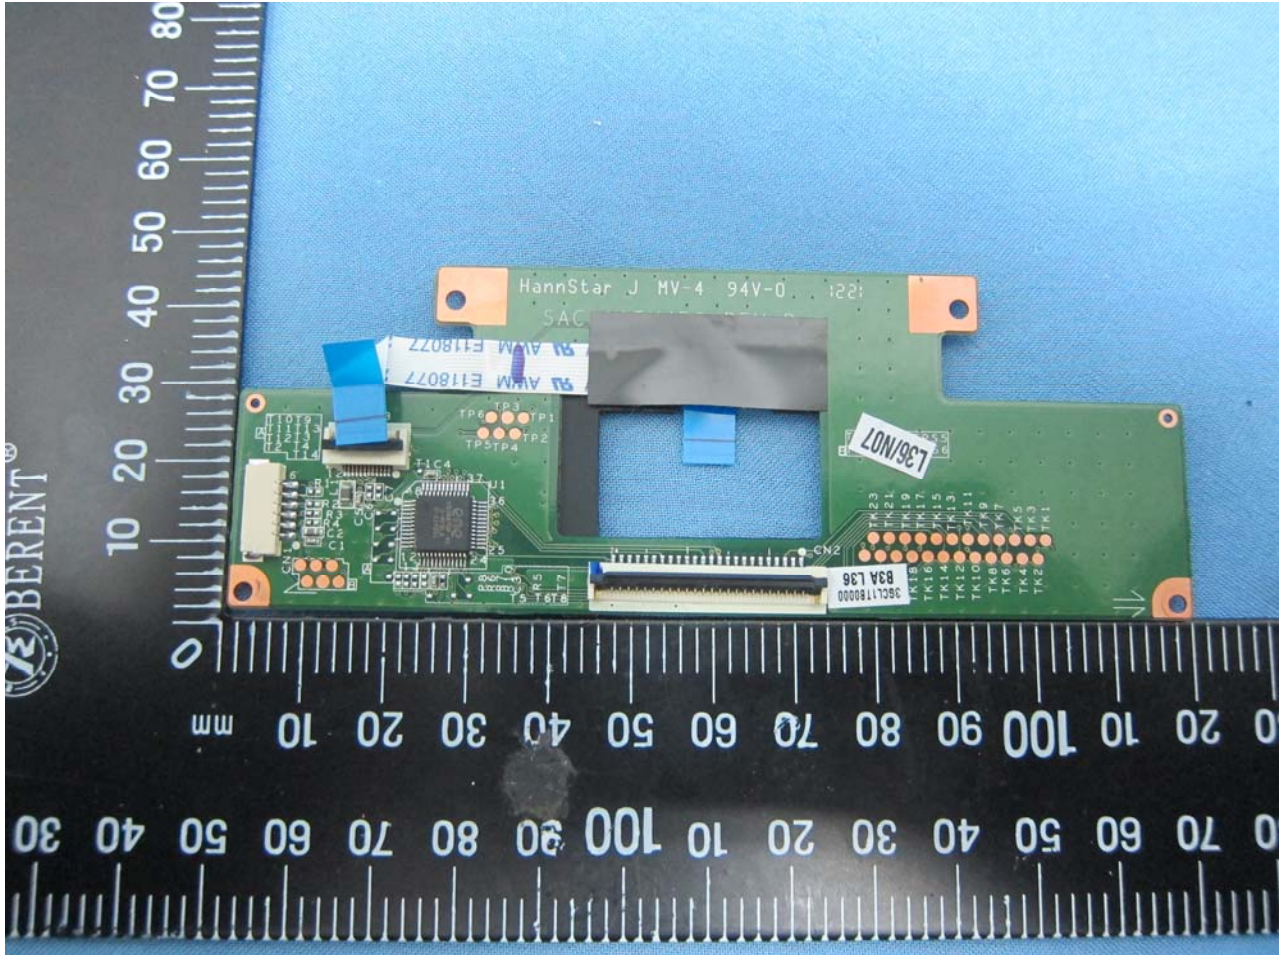


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

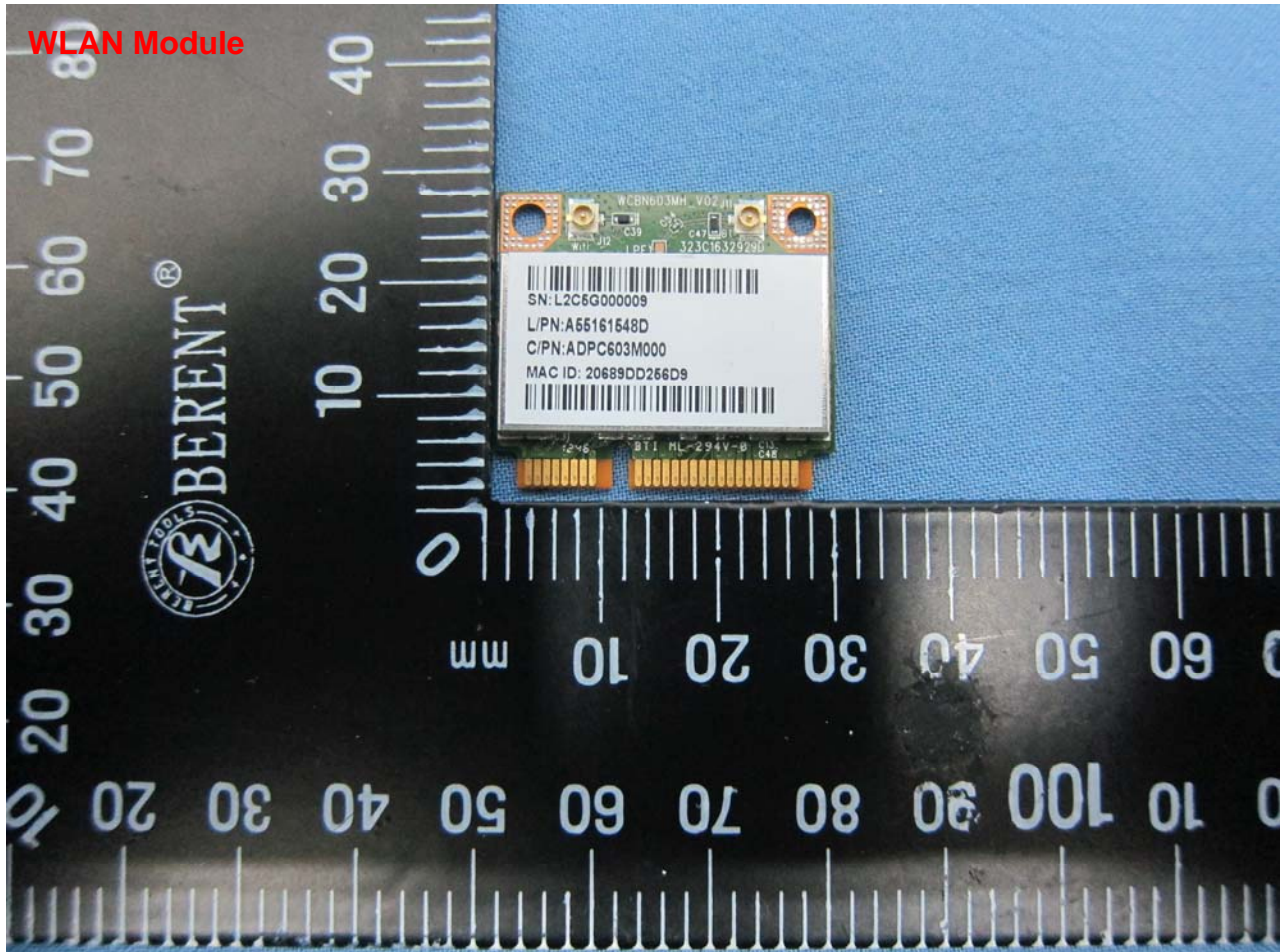

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

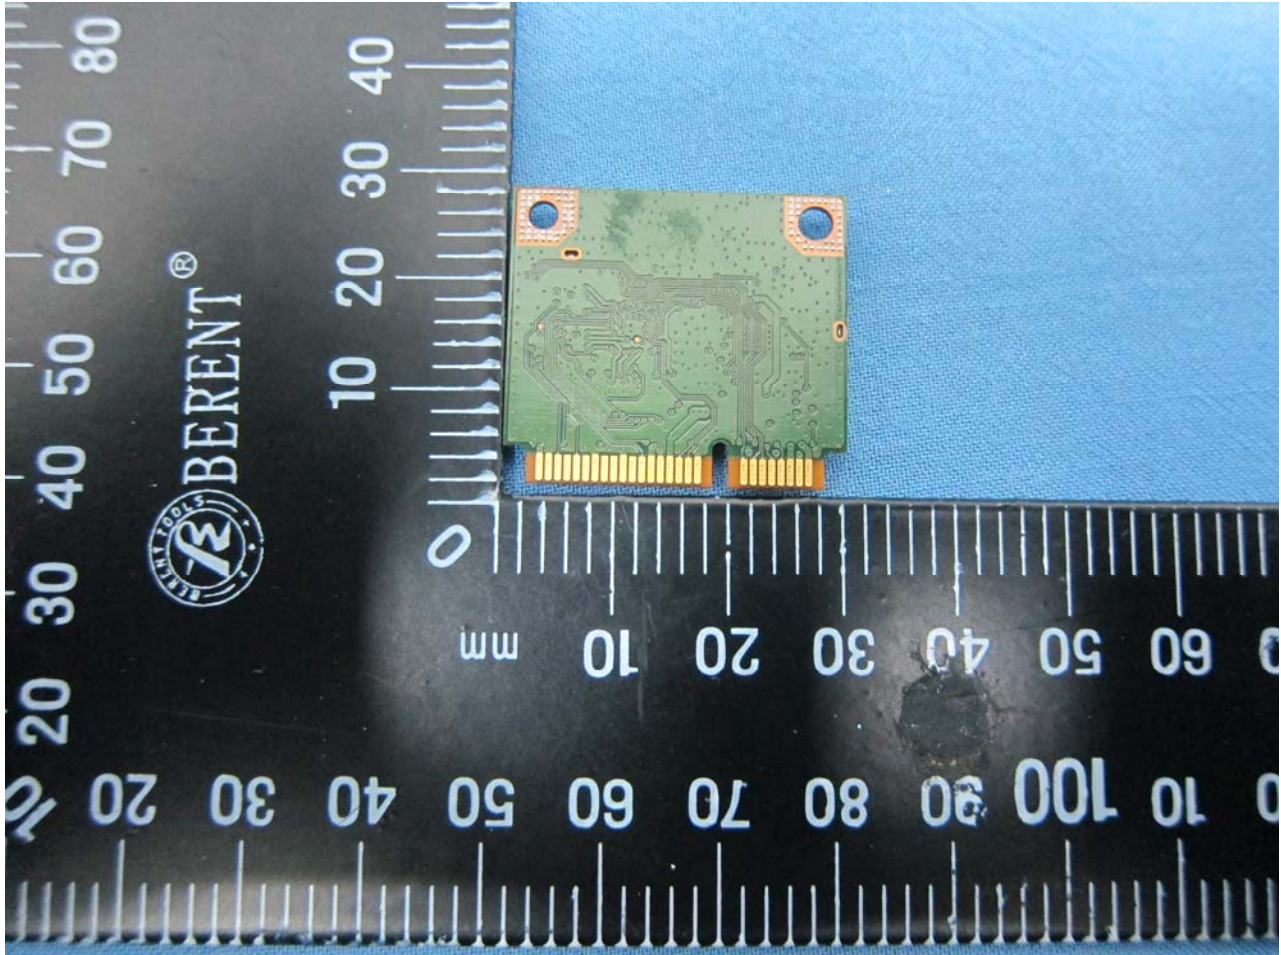

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

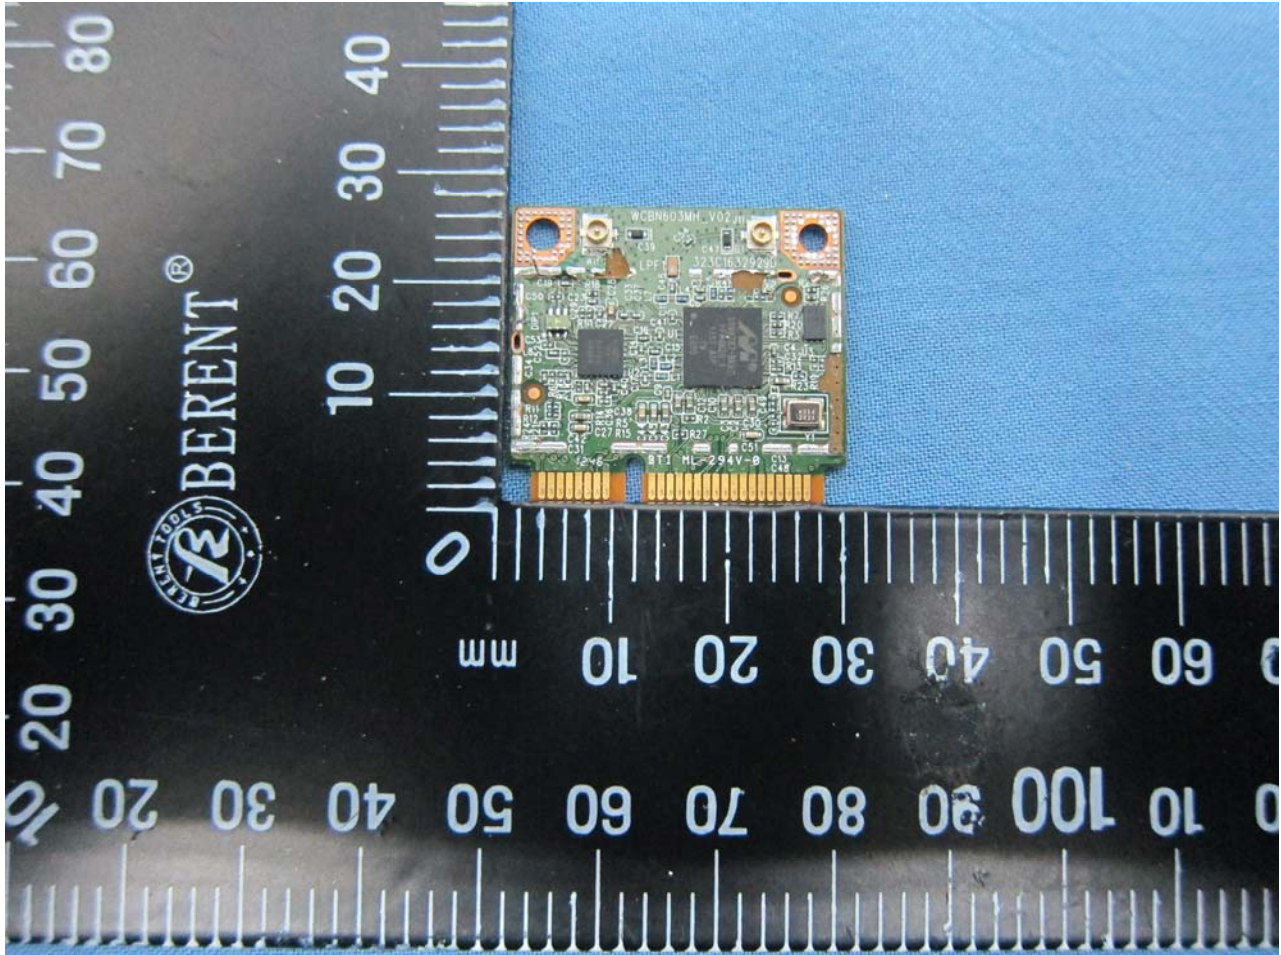


Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS




Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

WLAN Antenna <Tx / Rx>

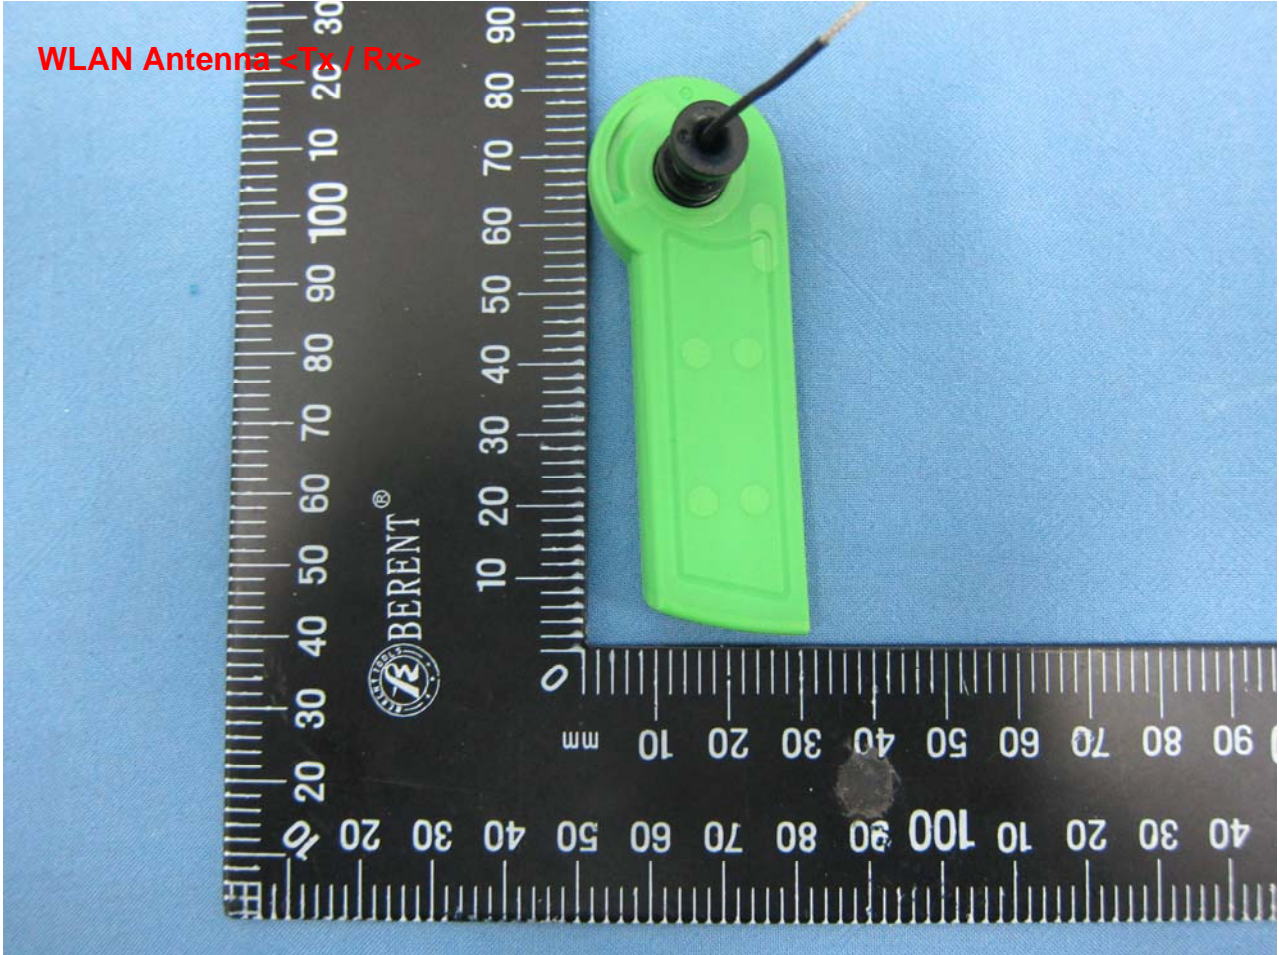

Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS

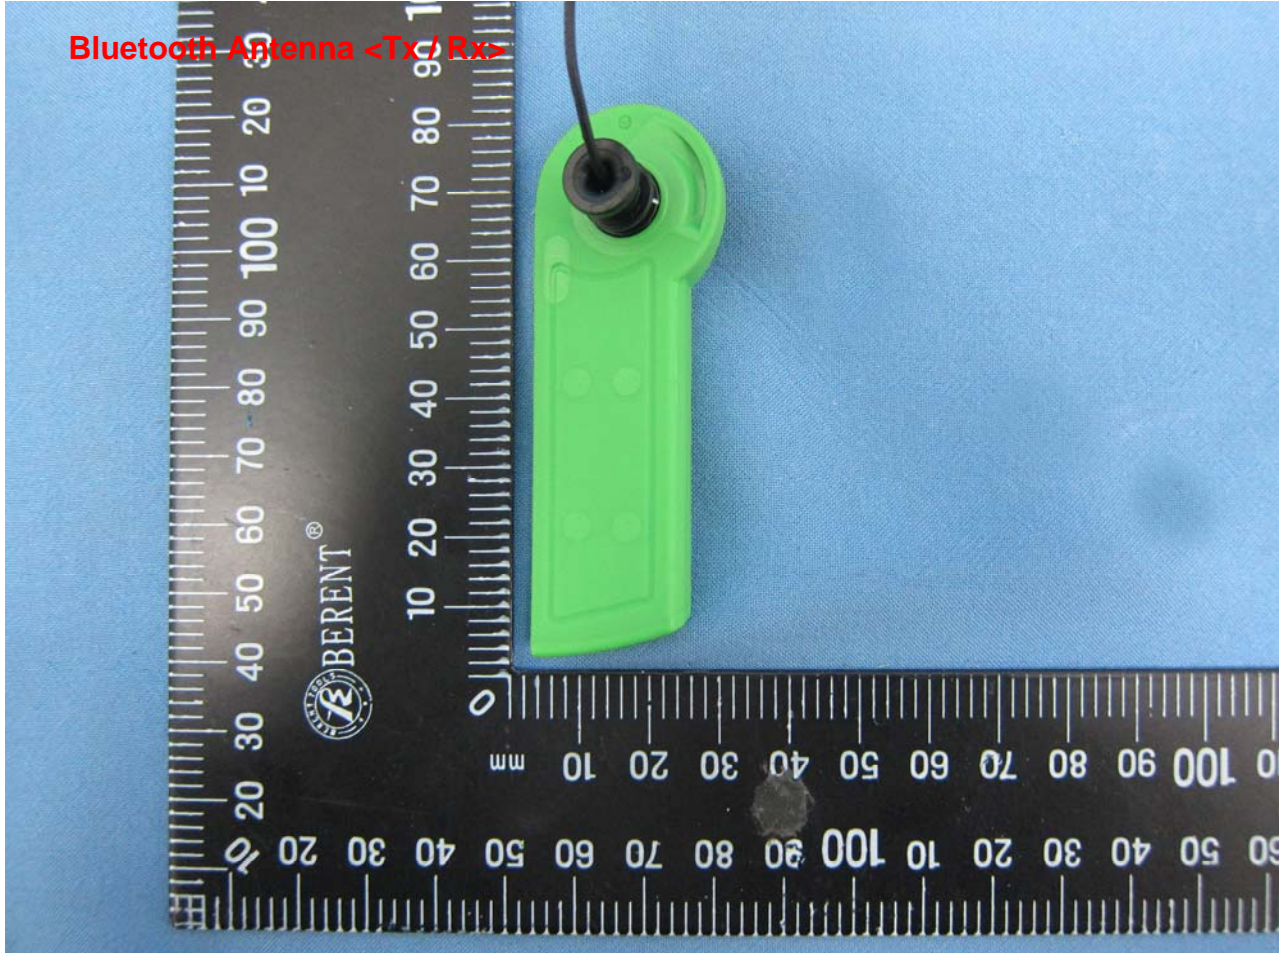


Appendix B. Setup Photographs

<Conducted Emission>



<Radiated Emission>

LF

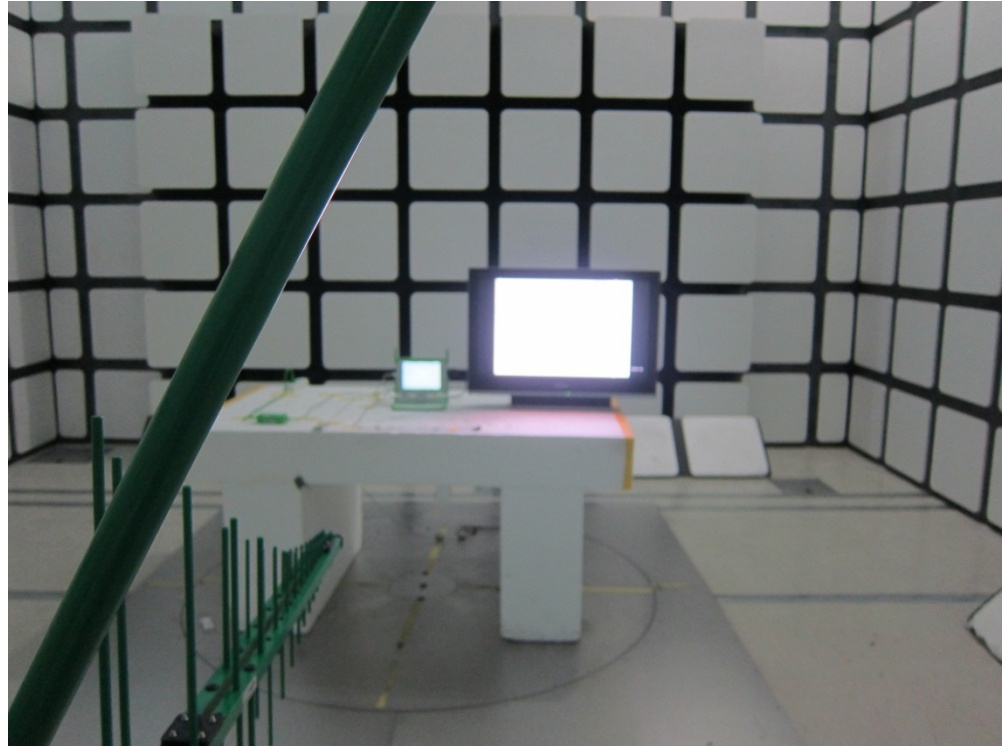

HF

